
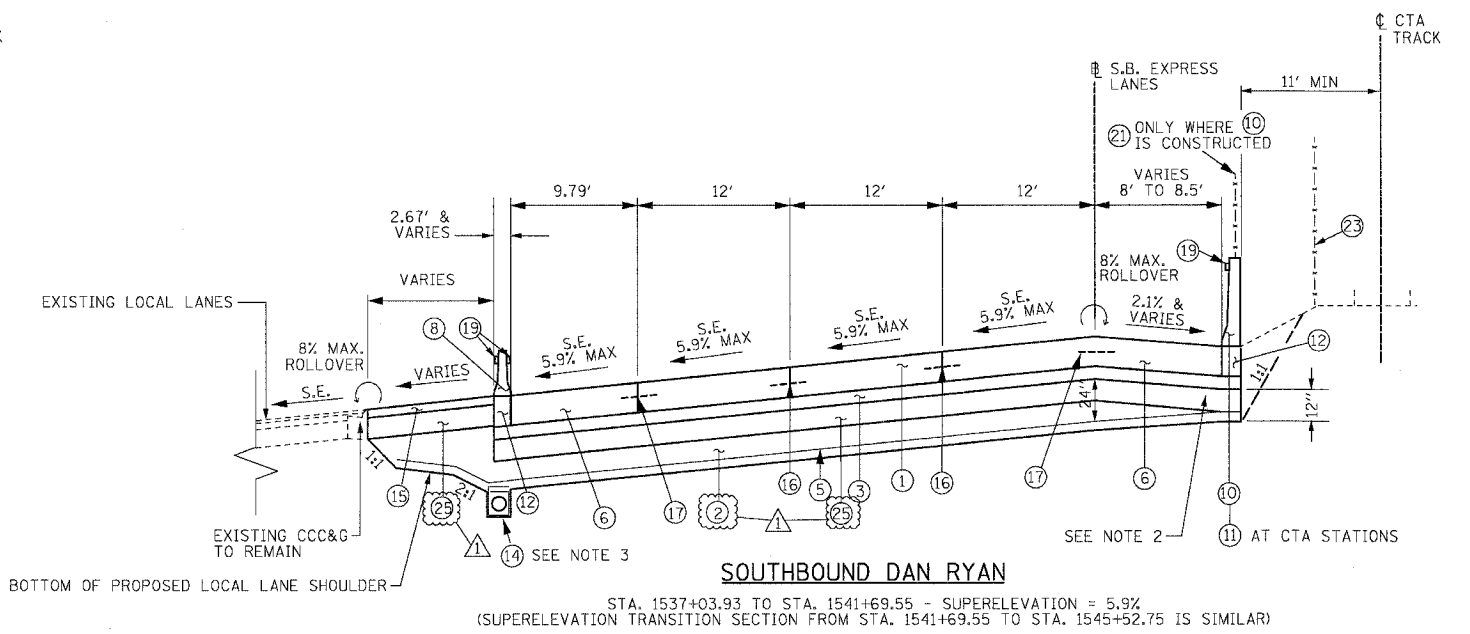
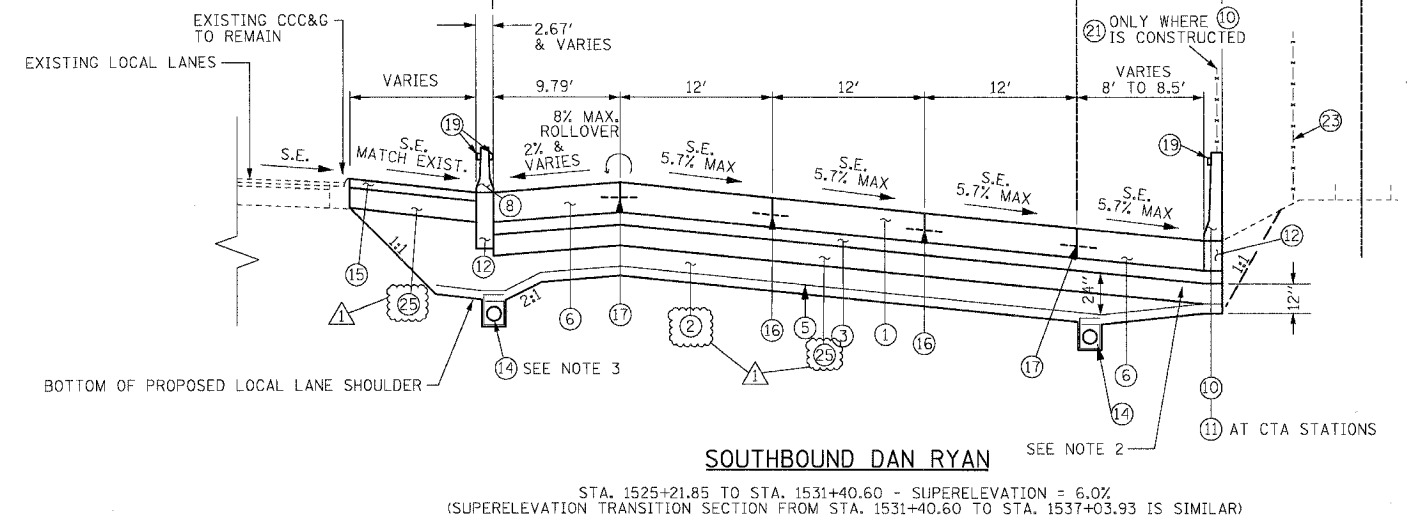
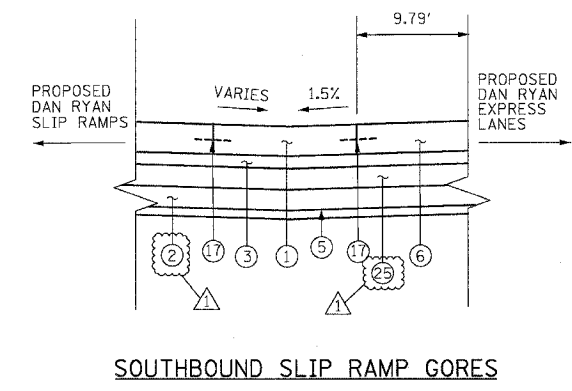
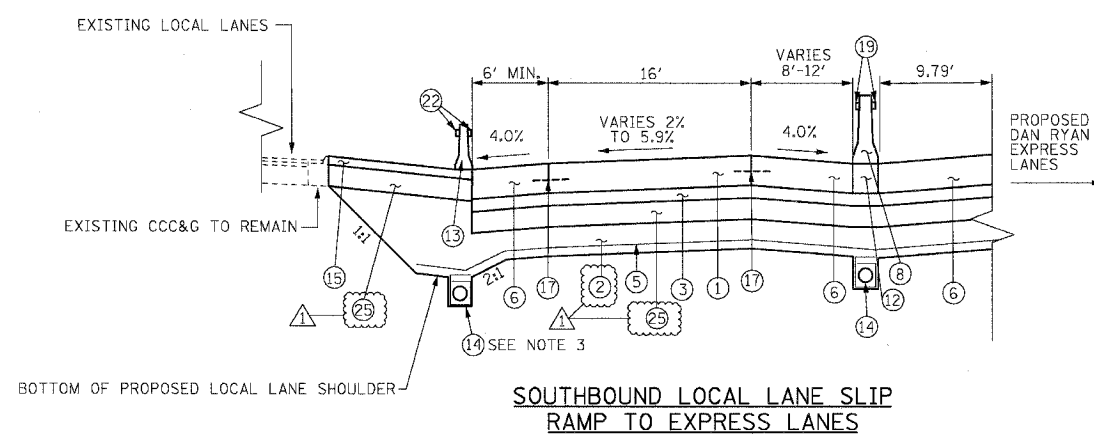


F.A.I.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
94/90		COOK	598	16
STA.		TO STA.		
62302		*1818, ETC, 2324.6-IPR-9		
FED. ROAD DIST. NO.	ILLINOIS	FED. AID PROJECT		

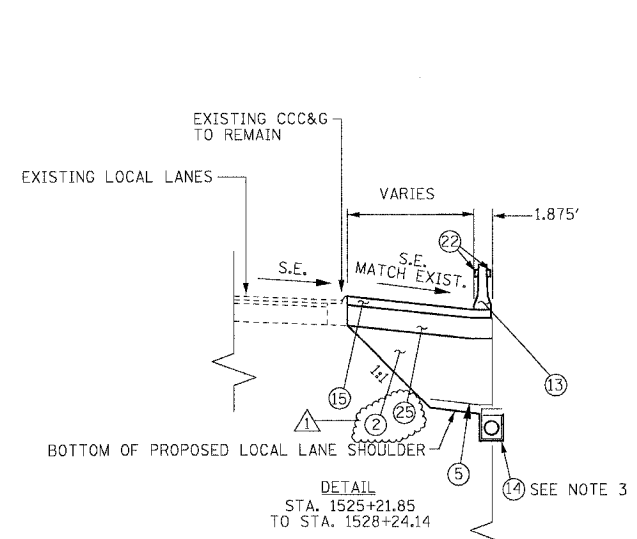

- PROPOSED LEGEND**
- ① CONTINUOUSLY REINFORCED PORTLAND CEMENT CONCRETE PAVEMENT 14" AND PAVEMENT REINFORCEMENT 14"
 - ② EXCAVATE AND PLACE EXISTING GRANULAR MATERIAL
 - ③ STABILIZED SUB-BASE - 6"
 - ④ SUB-BASE GRANULAR MATERIAL, TYPE B - 24" (INCLUDES 3" GRANULAR SUB-BASE CAP)
 - ⑤ GEOTECHNICAL FABRIC FOR GROUND STABILIZATION
 - ⑥ PORTLAND CEMENT CONCRETE SHOULDERS 14"
 - ⑦ COMBINATION CONCRETE CURB AND GUTTER, TYPE M4-24
 - ⑧ CONCRETE BARRIER, DOUBLE FACE 32"
 - ⑨ CONCRETE BARRIER, SINGLE FACE 32"
 - ⑩ CONCRETE BARRIER, SINGLE FACE 42" SPECIAL
 - ⑪ EXISTING BARRIER WALL MODIFICATIONS AT CTA STATIONS (SEE CIVIL DETAILS)
 - ⑫ BARRIER BASE
 - ⑬ TEMPORARY CONCRETE BARRIER (TYPE AND LOCATION AS SHOWN ON THE PLANS)
 - ⑭ PIPE UNDERDRAINS 6"
 - ⑮ TEMPORARY PAVEMENT (INTERSTATE) / TEMPORARY SHOULDERS
 - ⑯ LONGITUDINAL SAWED OR CONSTRUCTION JOINT. FOR LONGITUDINAL SAWED JOINT, POUR IN PLACE NO. 6 TIE BARS 30" LONG AT 30" C-C. FOR LONGITUDINAL CONSTRUCTION JOINT, DRILL AND GROUT NO. 8 TIE BARS 24" LONG AT 24" C-C.
 - ⑰ LONGITUDINAL CONSTRUCTION JOINT. DRILL AND GROUT NO. 8 TIE BARS 30" LONG AT 24" C-C.
 - ⑱ LONGITUDINAL CONSTRUCTION JOINT. DRILL AND GROUT NO. 6 TIE BARS 24" LONG AT 24" C-C.
 - ⑲ BARRIER WALL MARKERS, TYPE C (80' C-C)
 - ⑳ TOPSOIL FURNISH AND PLACE 4"; SEEDING CLASS 2A
 - ㉑ CTA FENCE
 - ㉒ MONODIRECTIONAL PRISMATIC BARRIER REFLECTOR
 - ㉓ CHAIN LINK FENCE, 6' (SPECIAL) (USED DURING ADJACENT CONSTRUCTION)
 - ㉔ CONCRETE MEDIAN SURFACE 6" (SPECIAL)
 - ㉕ SUB-BASE GRANULAR MATERIAL, TYPE B - 12"

- NOTES:**
- ALL TIE BARS SHALL BE DEFORMED AND EPOXY COATED. TIE BARS SHALL BE INCLUDED IN THE COST OF PAVEMENT, SHOULDER, AND CURB AND GUTTER ITEMS AND WILL NOT BE PAID FOR SEPARATELY.
 - THICKNESS OF EXCAVATE AND PLACE EXISTING GRANULAR MATERIAL UNDERNEATH THE SHOULDER ADJACENT TO CTA VARIES FROM 0" UNDERNEATH BARRIER TO 12" ABOVE UNDERDRAIN. THE THICKNESS OF EXCAVATE AND PLACE EXISTING GRANULAR MATERIAL AT UNDERDRAINS BETWEEN EXPRESS AND LOCAL LANES OR SLIP RAMP LANES MAY BE GREATER THAN 12" (SEE UNDERDRAIN DETAIL)
 - THE UNDERDRAIN WILL BE CONSTRUCTED TO PROVIDE FOR SUB-BASE DRAINAGE OF THE FUTURE LOCAL LANES. SEE PIPE UNDERDRAIN DETAILS.
 - SEE SPECIAL PROVISIONS AND EARTHWORK SCHEDULE FOR REQUIREMENTS OF 'EXCAVATE AND PLACE EXISTING GRANULAR MATERIAL'

REVISIONS	
NAME	DATE
ADDENDUM 1	8/12/05

ILLINOIS DEPARTMENT OF TRANSPORTATION
F.A.I. 94/90 (DAN RYAN EXPRESSWAY)
 31ST STREET TO 71ST STREET
 SB EXPRESS LANE RECONSTRUCTION
PROPOSED TYPICAL SECTIONS
 SOUTHBOUND DAN RYAN
 SCALE: NTS
 DATE: 07/07/05
 DRAWN BY: TER
 CHECKED BY: JDC

BOWMAN, BARRETT & ASSOCIATES INC.
 CONSULTING ENGINEERS
 Chicago, Illinois
 312.228.0100
 www.bbandainc.com

TYP-05
 07/26/2005 PM
 07/27/2005