
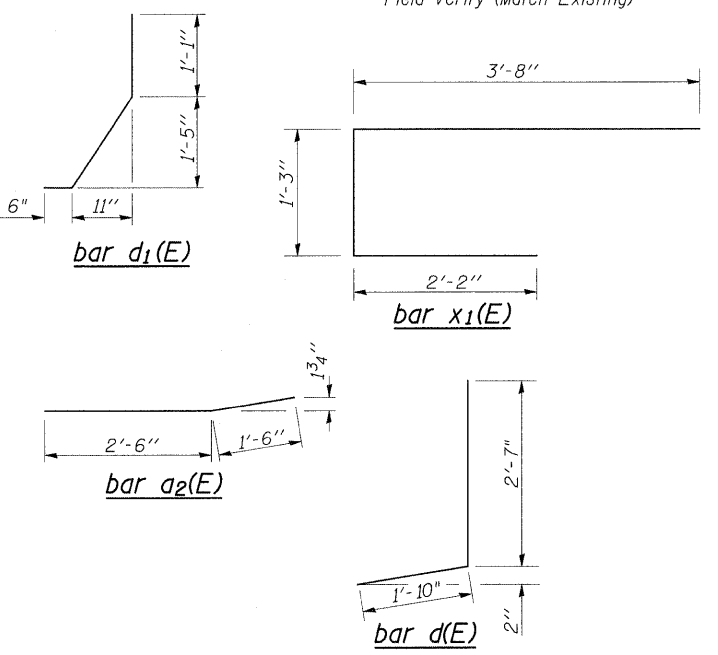


Concrete Removal

NOTES:
* Field Verify (Match Existing)

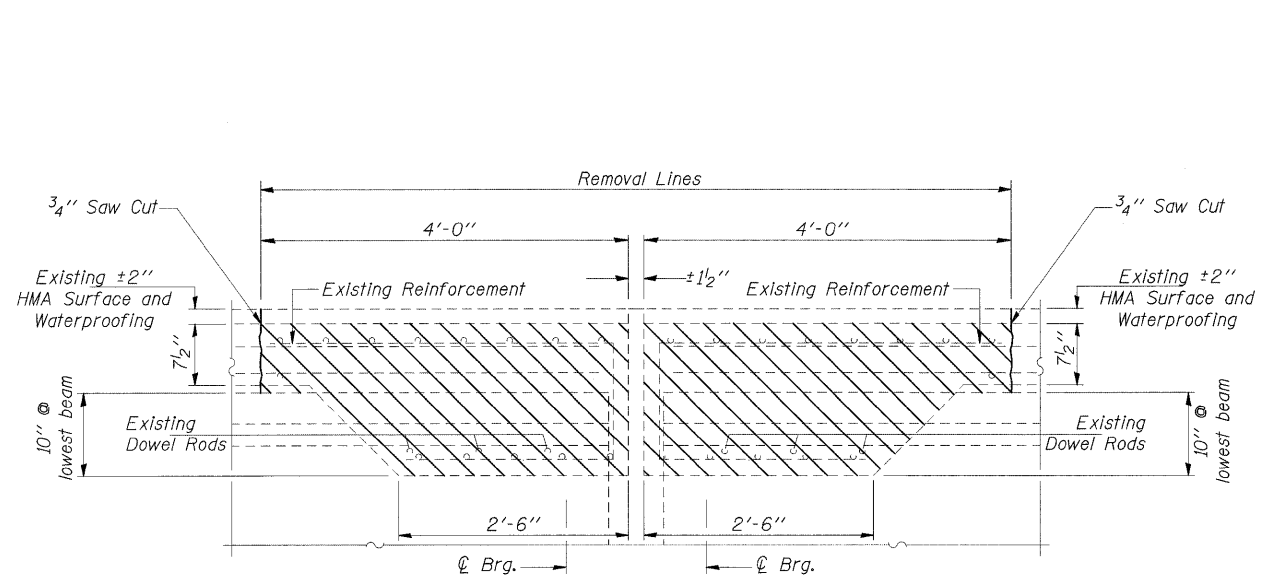

BILL OF MATERIAL (27 LOCATIONS)

Bar No.	Size	Length	Shape
a ₂ (E)	#6	4'-0"	—
a ₇ (E)	#7	16'-5"	—
a ₈ (E)	#6	6'-6"	—
a ₁₀ (E)	#7	18'-5"	—
d(E)	#5	4'-5"	J
d ₁ (E)	#5	3'-3"	J
x ₁ (E)	#6	7'-1"	□
Concrete Superstructure	Cu. Yd.	414.2	
Concrete Removal	Cu. Yd.	372.6	
Reinforcement Bars, Epoxy Coated	Pound	84130	

Reinforcement bars designated (E) shall be epoxy coated.
PIER #S 2A THRU 15
JOINT REPLACEMENT DETAILS
PULASKI COUNTY
STRUCTURE NO. 077-0001 (N.B.)
STRUCTURE NO. 077-0002 (S.B.)