



VETERANS PARKWAY AND MORRIS AVENUE (NORTHBOUND)

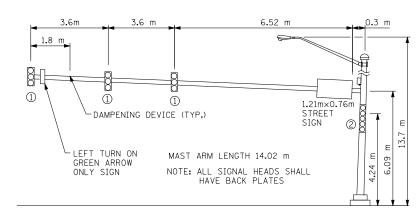


VETERANS PARKWAY AND MORRIS AVENUE (EASTBOUND)

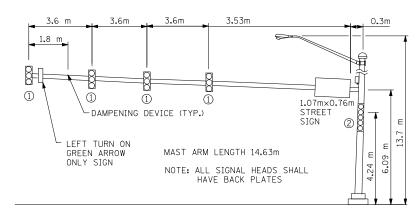


VETERANS PARKWAY AND GREENWOOD AVENUE (NORTHBOUND)

	VETERANS PARWAY MORRIS	/ MAST ARM LENGTH	FOUNDATION DIAMETER	FOUNDATION DEPTH	MIN. DEPTH INTO BED ROCK	
	N.E.	12 . 19m	750mm	4.6m	0.0	
	N.W.	15.24m	750mm	5.2m	0.0	
	S.E.	14.02m	750mm	4.6m	0.0	
	S.W.	15.24m	750mm	5.2m	0.0	
	VETERANS PARWAY GREENWOOD	(/				
	N.E.	14.63m	750mm	4.6m	0.0	
	N.W.	14.63m	750mm	4.6m	0.0	
	S.E.	8.53m	750mm	4.6m	0.0	
-	SIX POINTS ROAD. MORRIS	/				
١	N.E.	13.41m	750mm	4.6m	0.0	
3	N.W.	11 . 58m	750mm	4.6m	0.0	
١.	S.E.	6.09m	750mm	4.6m	0.0	
:	S.W.	12 . 8m	750mm	4.6m	0.0	

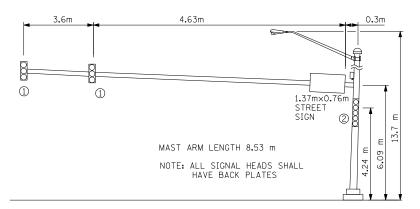

VETERANS PARKWAY AND GREENWOOD AVENUE (EASTBOUND)






20mm BORDER 200mm D SERIES LETTERS 2 SIGNS REQUIRED= 0.81 SQ M EACH = 1.62 SQ M




20mm BORDER 200mm D SERIES LETTERS 2 SIGNS REQUIRED= 1.04 SQ M EACH = 2.08 SQ M


NOTE: REFER TO I.D.O.T. STANDARD 720016



20mm BORDER 200mm D SERIES LETTERS 2 SIGNS REQUIRED= 0.91 SQ M EACH = 1.81 SQ M

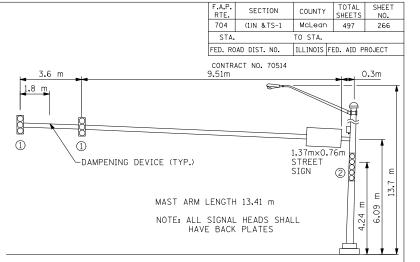


SIX POINTS ROAD MORRIS AVENUE (NORTHBOUND)

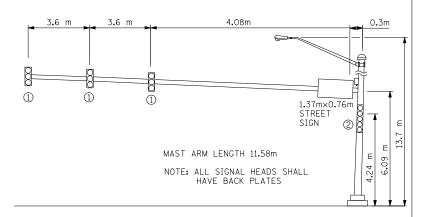

SIX POINTS ROAD MORRIS AVENUE (WESTBOUND)

TS-17

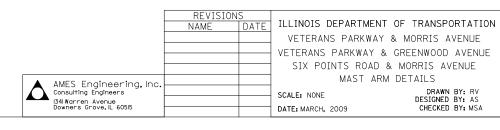

LEFT TURN ON GREEN ARROW ONLY

R10-5L (0.6mX0.7m) 8 SIGNS REQUIRED - 0.45 SQ.M EACH - 0.45 SQ.M EACH

TYPE A SHEETING REQUIRED
THIS SIGN SHALL BR LOCATEDO.15m TO
0.3M TO THE RIGHT OF EACH 3 SECTION
MAST ARM MOUNTED LEFT TURN SIGNAL.
PLUS ADJACENT TO EACH POST MOUNTED
3-SECTION LEFT TURN LANE

FILE\$