

REMOVE EXISTING TRAFFIC SIGNAL EQUIPMENT, SPECIAL - QTY, 1 LUMP SUM



THE FOLLOWING TRAFFIC SIGNAL EQUIPMENT SHALL BE REMOVED AND DELIVERED BY THE CONTRACTOR TO THE ILLINOIS DEPARTMENT OF TRANSPORTATION, 1025 W. DETWEILLER DR., PEORIA, IL. PLEASE CONTACT PAUL GRANT AT (309) 671-4474 FORTY-EIGHT HOURS IN ADVANCE OF DELIVERY.

QTY.	ITEM
1.0	CONTROLLER CABINET AND CONTENTS, COMPLETE

THE FOLLOWING ITEMS SHALL BE REMOVED AND DISPOSED OF BY THE CONTRACTOR OFF OF THE RIGHT-OF-WAY. THE SALVAGE VALUE OF THIS EQUIPMENT SHALL BE REFLECTED IN THE UNIT BID PRICE FOR REMOVE EXISTING TRAFFIC SIGNAL EQUIPMENT, SPECIAL.

QTY.	ITEM
1.0	SIGNAL HEAD, 1-FACE, 5-SECTION, BRACKET MOUNTED
5.0	SIGNAL HEAD, 1-FACE, 3-SECTION, SPAN WIRE OR BRACKET MOUNTED
5.0	SIGNAL HEAD, 1-FACE, 4-SECTION, SPAN WIRE OR BRACKET MOUNTED
4.0	WOOD POLE WITH GUY WIRE ASSEMBLIES
1.0	ELECTRICAL SERVICE INSTALLATION
ALL	ELECTRIC CABLE
ALL	SPAN WIRE AND TETHER WIRE
ALL	GALVANIZED STEEL CONDUIT ATTACHED TO STRUCTURE

THE REMOVAL ITEMS ARE AS INDICATED ON THE PLANS. THE CONTRACTOR SHALL VERIFY ALL REMOVAL ITEMS PRIOR TO BIDDING.

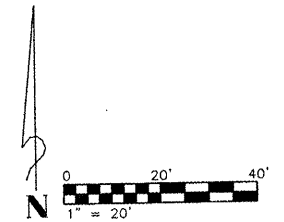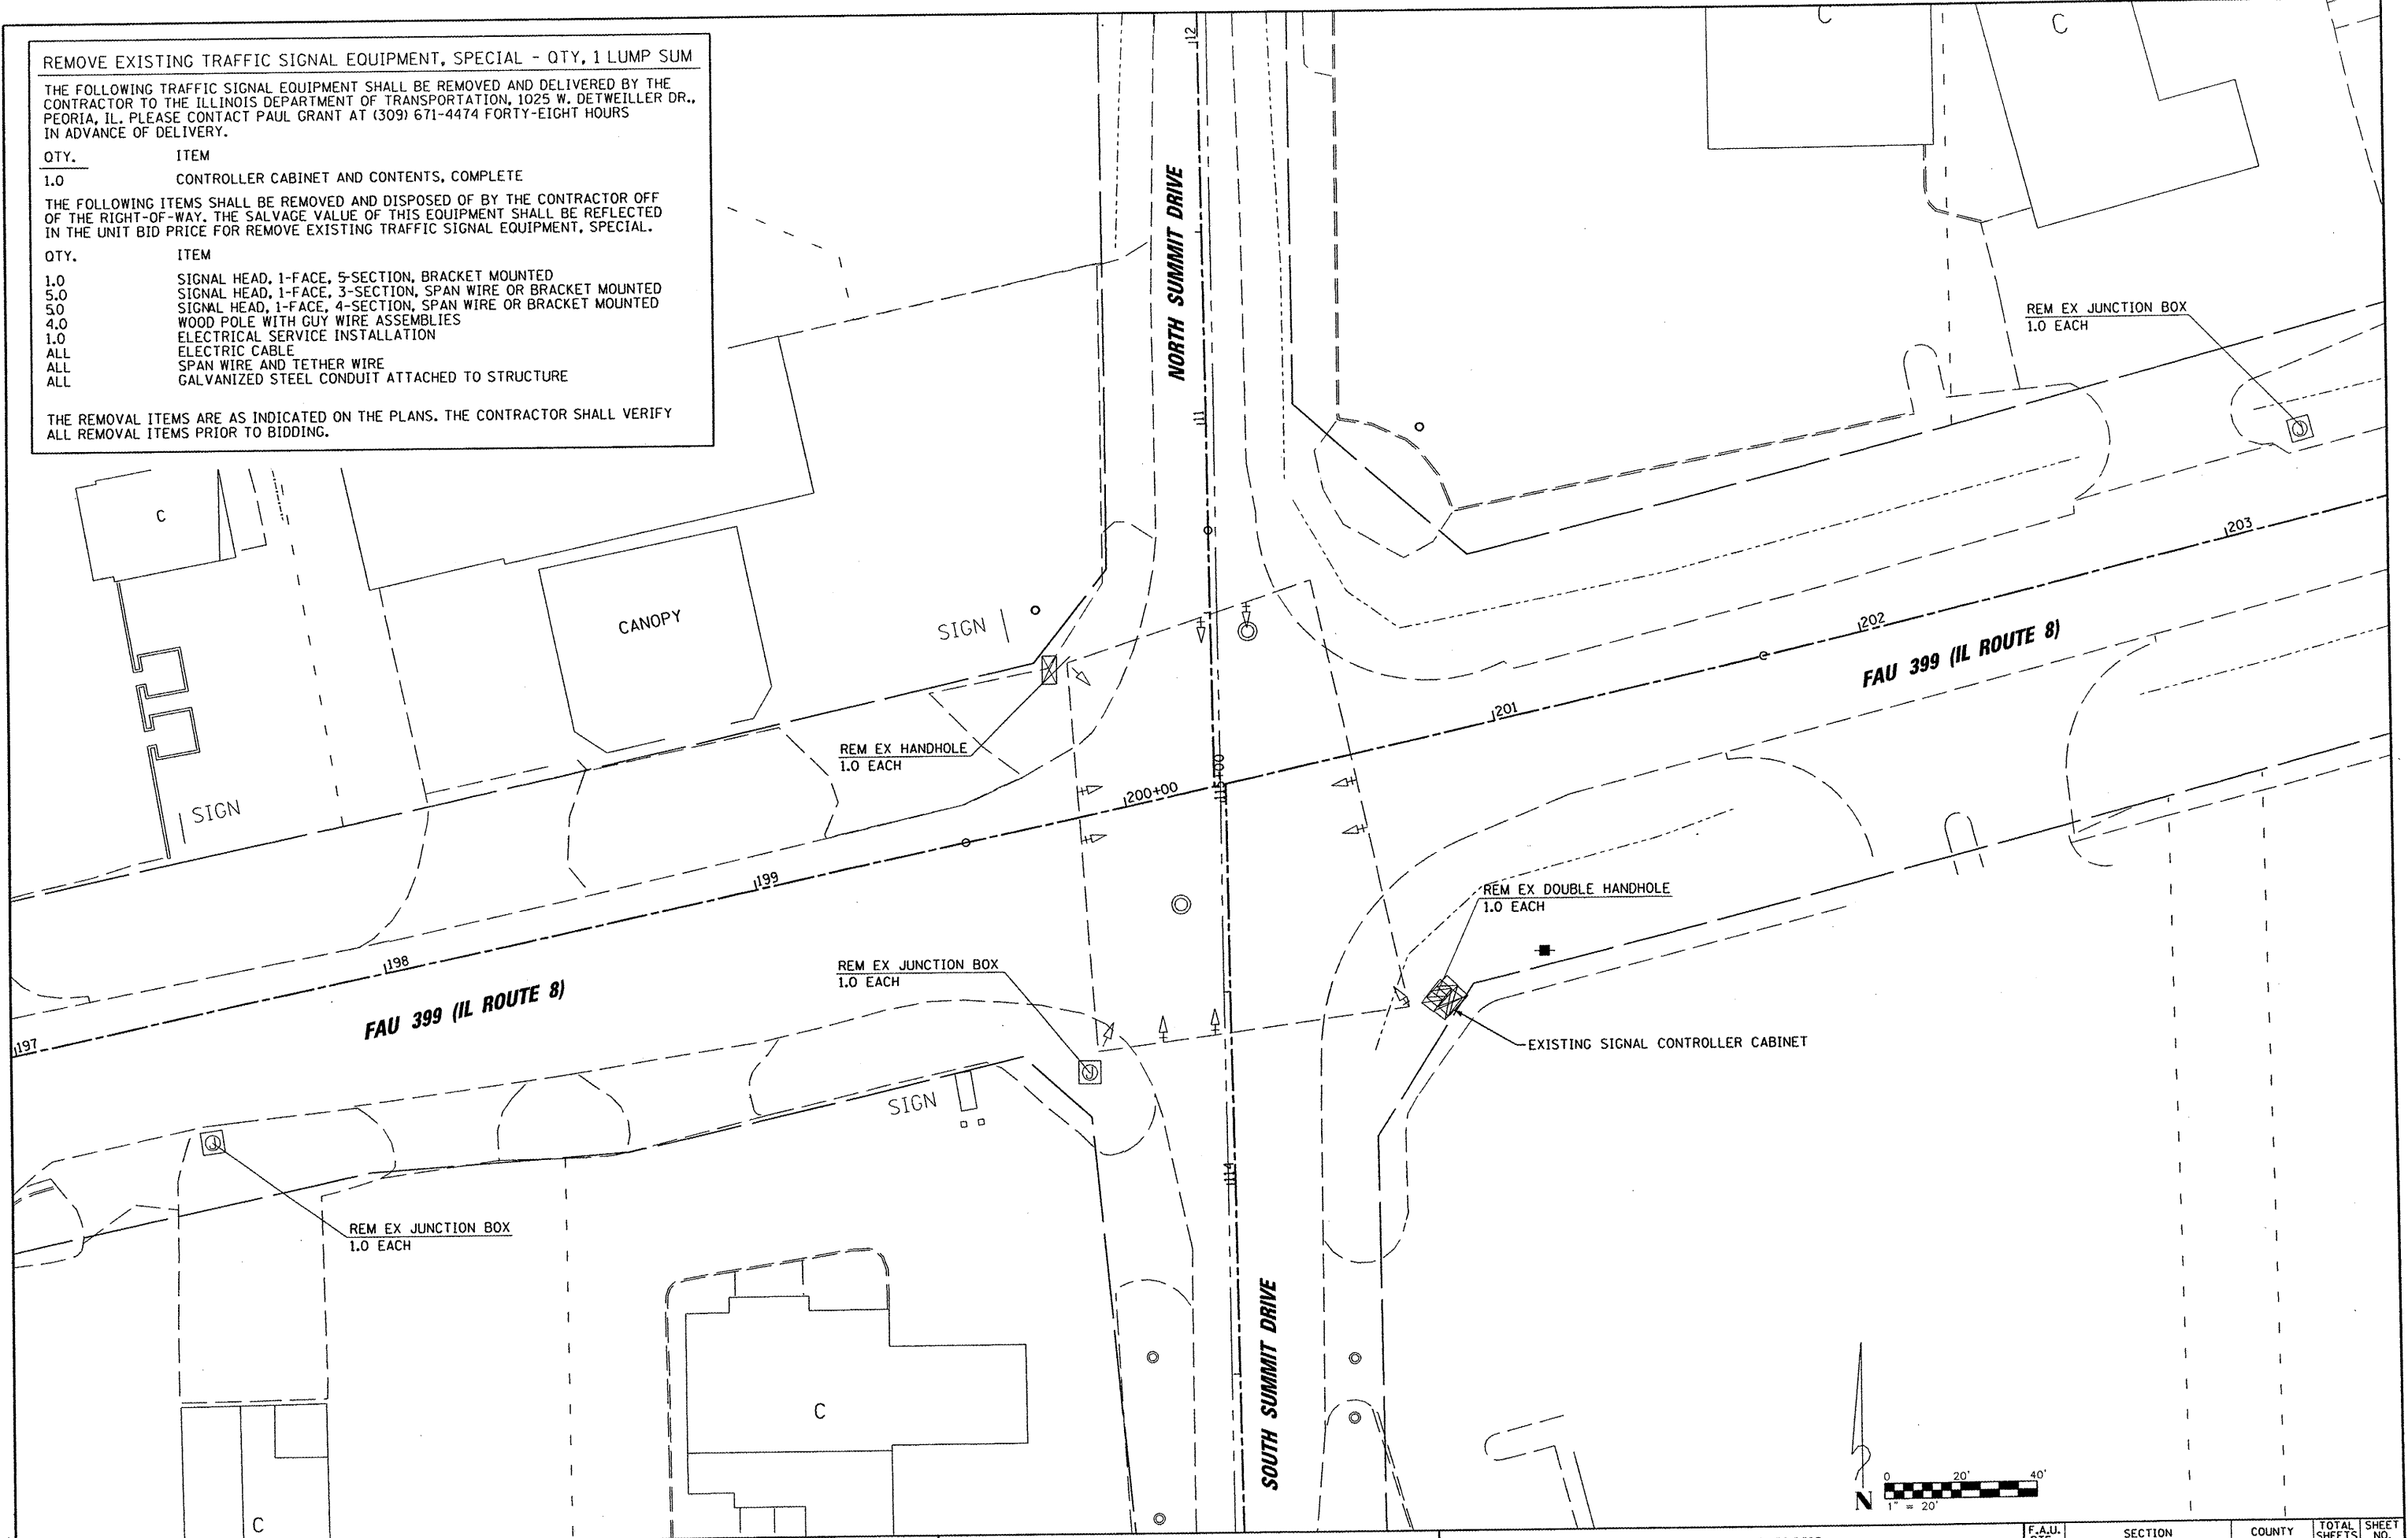

FILE NAME *	PLOT SCALE = *SCALE*	DESIGNED -	REVISED -
	PLOT DATE = *DATE*	DRAWN -	REVISED -
	PLOT TIME = *TIME*	CHECKED -	REVISED -
		DATE -	REVISED -



TRAFFIC SIGNAL PLANS
EXISTING TRAFFIC SIGNAL AND DEMOLITION PLAN
 SCALE: 1" = 20' SHEET NO. 2 OF 7 SHEETS STA. TO STA.

F.A.U. RTE.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
6775	04-00141-00-FP	TAZEWELL	187	88
FED. ROAD DIST. NO.			ILLINOIS FED. AID PROJECT	
			CONTRACT NO. 89352	