


STATE OF ILLINOIS  
DEPARTMENT OF TRANSPORTATION

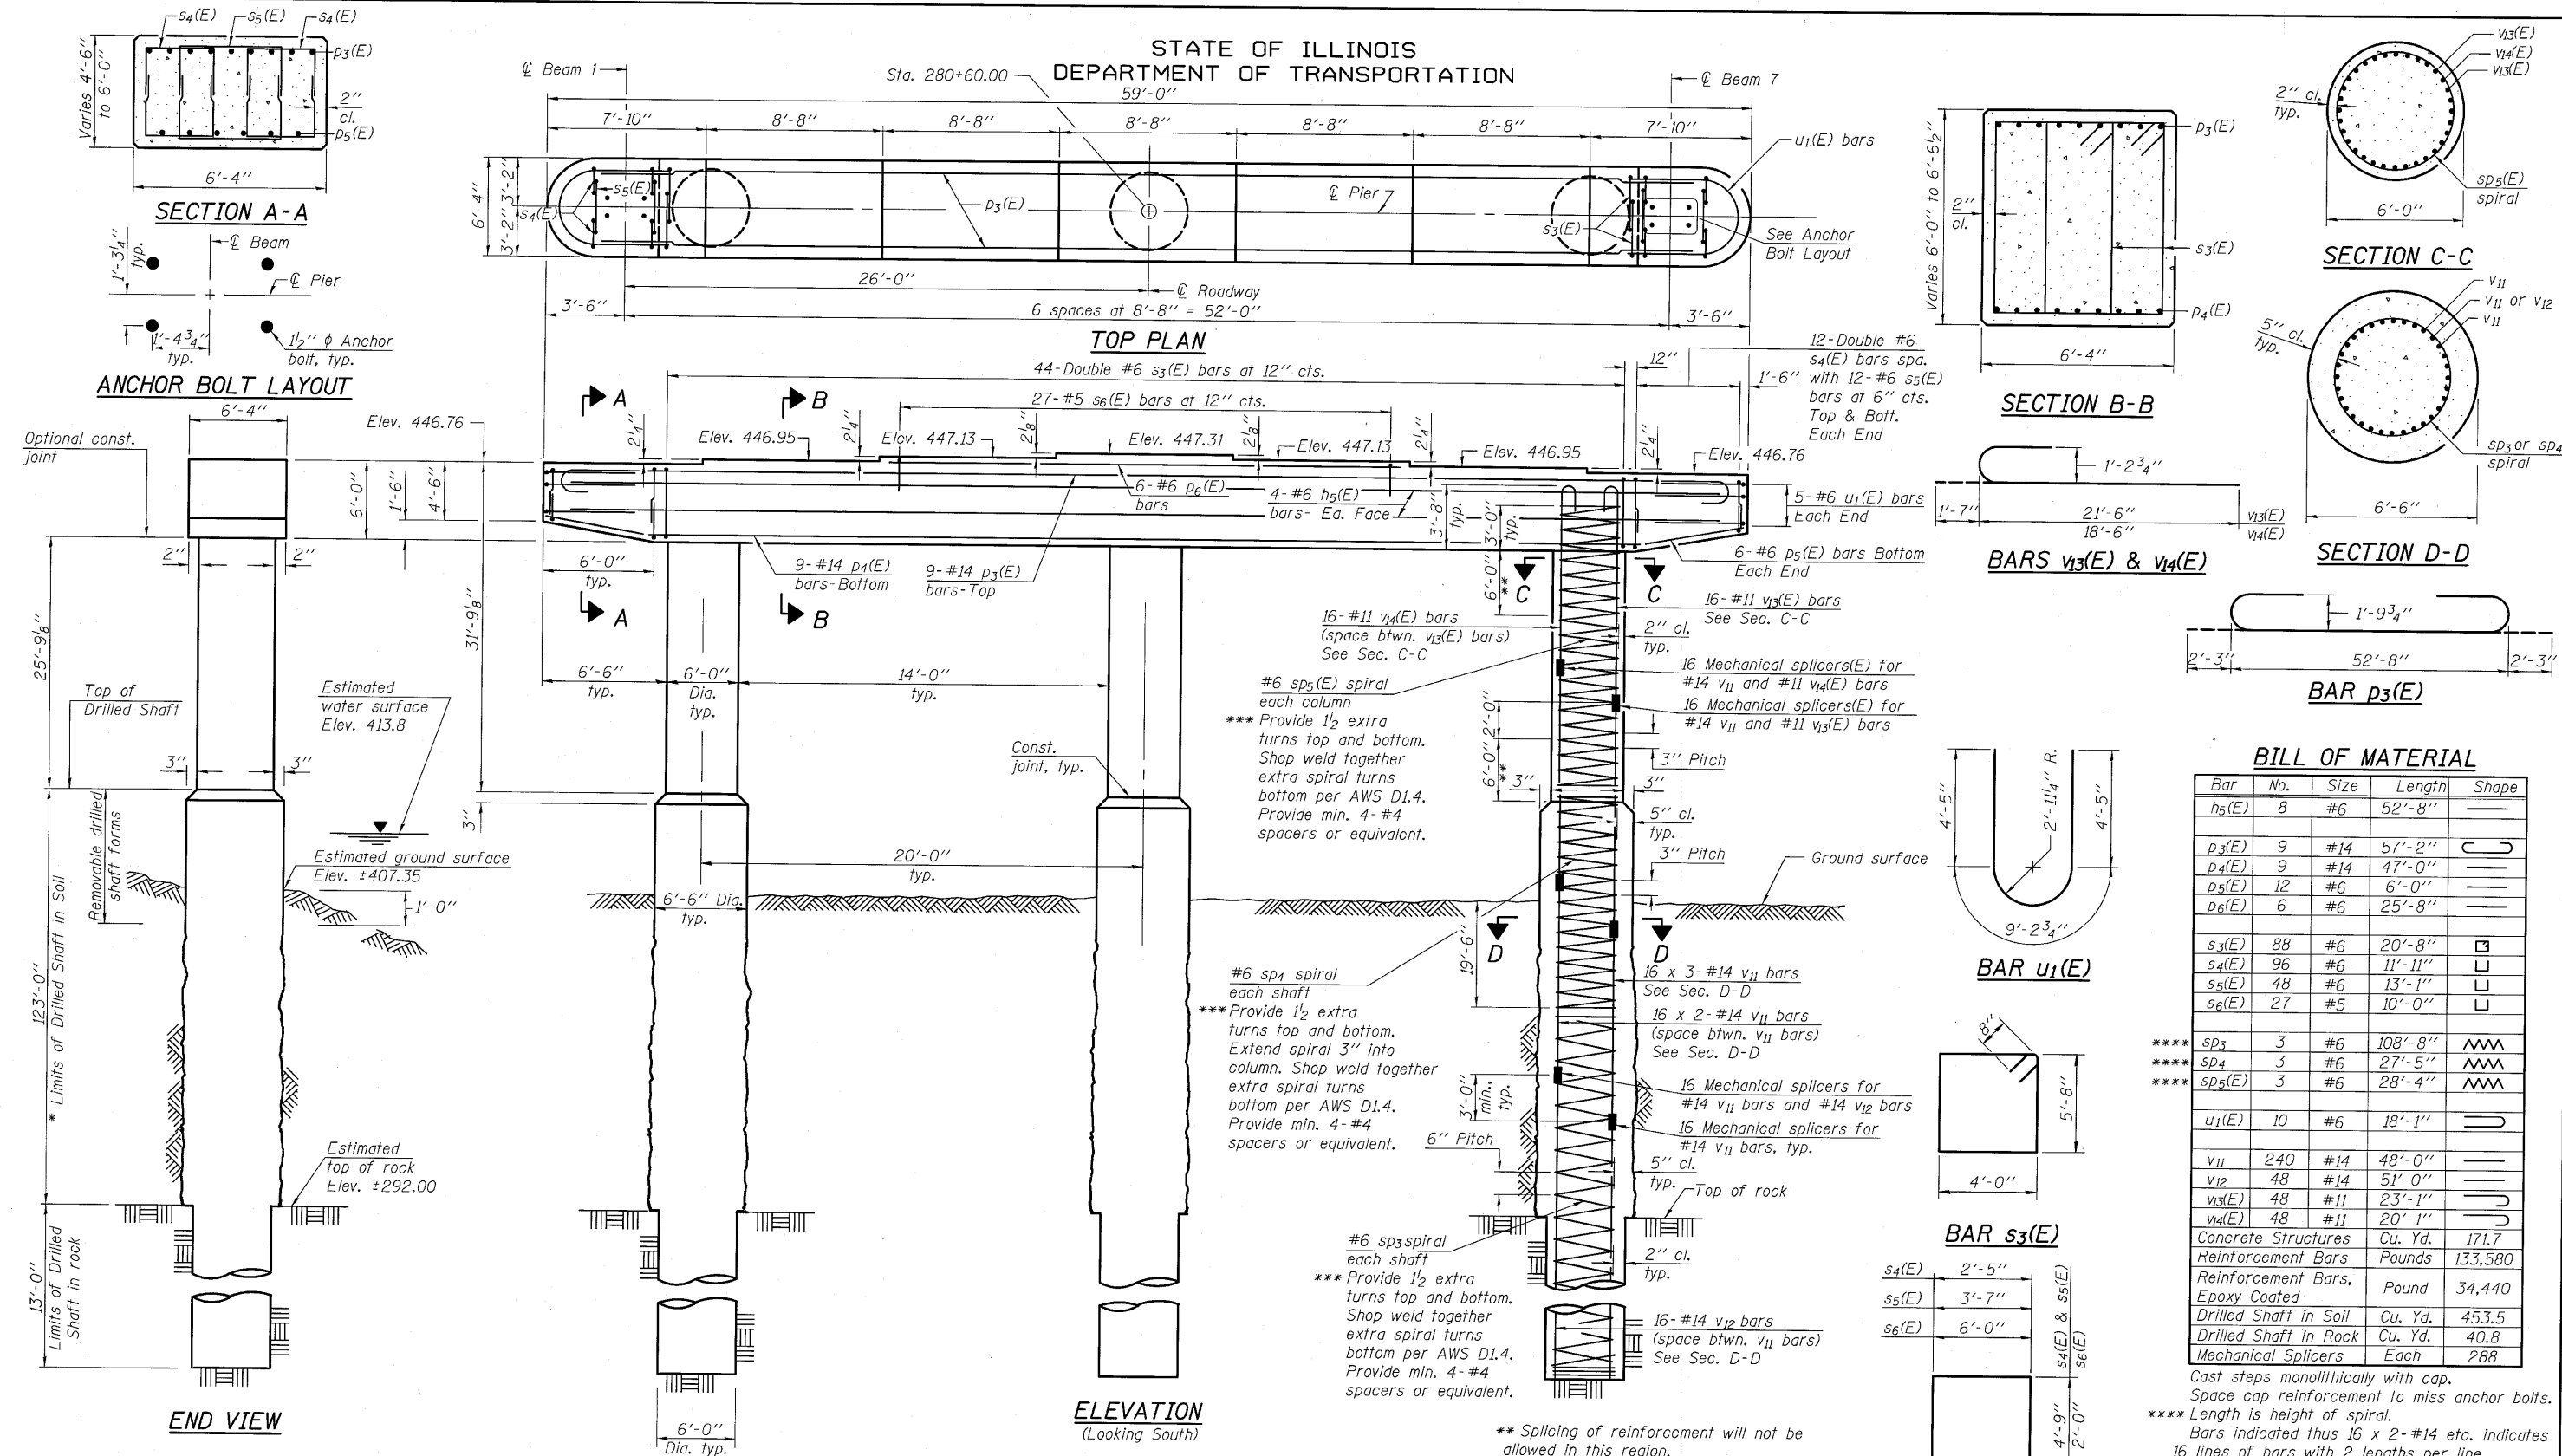

**BILL OF MATERIAL**

Bar	No.	Size	Length	Shape
h <sub>5</sub> (E)	8	#6	52'-8"	—
p <sub>3</sub> (E)	9	#14	57'-2"	U
p <sub>4</sub> (E)	9	#14	47'-0"	—
p <sub>5</sub> (E)	12	#6	6'-0"	—
p <sub>6</sub> (E)	6	#6	25'-8"	—
s <sub>3</sub> (E)	88	#6	20'-8"	□
s <sub>4</sub> (E)	96	#6	11'-11"	U
s <sub>5</sub> (E)	48	#6	13'-1"	U
s <sub>6</sub> (E)	27	#5	10'-0"	U
**** s <sub>p3</sub>	3	#6	108'-8"	~
**** s <sub>p4</sub>	3	#6	27'-5"	~
**** s <sub>p5</sub> (E)	3	#6	28'-4"	~
u <sub>1</sub> (E)	10	#6	18'-1"	—
v <sub>11</sub>	240	#14	48'-0"	—
v <sub>12</sub>	48	#14	51'-0"	—
v <sub>13</sub> (E)	48	#11	23'-1"	—
v <sub>14</sub> (E)	48	#11	20'-1"	—
Concrete Structures		Cu. Yd.	171.7	
Reinforcement Bars, Epoxy Coated		Pounds	133,580	
Reinforcement Bars, Epoxy Coated		Pound	34,440	
Drilled Shaft in Soil		Cu. Yd.	453.5	
Drilled Shaft in Rock		Cu. Yd.	40.8	
Mechanical Splicers		Each	288	

Cast steps monolithically with cap.  
Space cap reinforcement to miss anchor bolts.  
\*\*\*\* Length is height of spiral.  
Bars indicated thus 16 x 2-#14 etc. indicates 16 lines of bars with 2 lengths per line.

DESIGNED	EML
CHECKED	KAK
DRAWN	AJF
CHECKED	KAK

Note:  
When splicing of spiral reinforcement is necessary, the spirals shall be provided with 1/2 extra turns at the ends to be spliced. These additional turns shall either be welded together according to AWS D1.4, or shall both terminate with a 135° standard hook.

\* If the prevailing water surface elevation during construction is consistently different than estimated on the plans, the contractor may propose an adjustment to the top of the drilled shaft elevation as part of their installation procedure. The top of all drilled shafts within a substructure unit shall be constructed to the same elevation and extend above the prevailing water surface. The quantities and reinforcement detailing are based on the top of shaft and the estimated elevations shown and may change based on the actual elevations encountered at each shaft and the final top of shaft elevation.

\*\* Splicing of reinforcement will not be allowed in this region.  
\*\*\* Allowable substitution: Provide 1/2 extra turns top and bottom with 135° standard hook into core at ends of spiral.

**BARS s<sub>4</sub>(E), s<sub>5</sub>(E) & s<sub>6</sub>(E)**

**PIER 2  
STRUCTURE NO. 082-0038**

SHEET NO. 40	F.A.P. RTE.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
48 SHEETS	312	64-1VBR	ST. CLAIR	259	92
CONTRACT NO. 76882					
ILLINOIS FED. AID PROJECT					

