

SECTION	COUNTY	SHEETS	SHEET NO.
08-00119-00-FP	WAYNE	23	1
FAS ROUTE 819 PAPERTOWN ROAD			
ILLINOIS PROJECT NO. RS-0819(133)			
CONTRACT NO. 95632			

STATE OF ILLINOIS  
DEPARTMENT OF TRANSPORTATION  
PLANS FOR  
PROPOSED LOCAL AGENCY IMPROVEMENT  
STR FUNDS  
FAS 819  
Papertown Road  
SECTION 08-00119-00-FP  
WAYNE COUNTY PROJECT RS-0819(133)  
C-97-092-10

INDEX OF SHEETS

SHEET NO.	DESCRIPTION
1	COVER SHEET
2	GENERAL NOTES, DETAILS AND SCHEDULES
3-17	PLAN - PROFILE SHEETS
18-23	ROADWAY CROSS SECTIONS


SUMMARY OF QUANTITIES

QUANTITY	UNIT	ITEM	CODE NO.
8	UNIT	SHAPING ROADWAY	LR212000
1164	CU YD	EARTH EXCAVATION	20200100
1220	CU YD	FURNISHED EXCAVATION	20400800
0.90	ACRE	SEEDING, CLASS 2 (SPECIAL)	25001000
97	TON	STONE DUMPED RIPRAP, CLASS A4	28100807
38,406	SQ YD	PROCESSING SOIL-CEMENT BASE COURSE 8"	35200300
21,507	100 WT	CEMENT	35200500
1,467	TON	AGGREGATE SURFACE COURSE, TYPE B	40200800
19,200	GALLON	BITUMINOUS MATERIALS (COVER AND SEAL COATS)	40300300
480	TON	COVER COAT AGGREGATE	40300500
480	TON	SEAL COAT AGGREGATE	40300600
56	FOOT	PIPE CULVERTS, CLASS A, TYPE 2, 48"	542A1093
360	FOOT	PIPE CULVERTS, CLASS D, TYPE 1 15"	542D0220
110	FOOT	PIPE CULVERTS, CLASS D, TYPE 1 24"	542D0229
40	FOOT	PIPE CULVERTS, CLASS A, TYPE 1, EQUIVALENT ROUND-SIZE 18"	542A5473
136	FOOT	PIPE CULVERTS, CLASS A, TYPE 1, EQUIVALENT ROUND-SIZE 24"	542A5479
216	FOOT	PIPE CULVERTS, CLASS A, TYPE 1, EQUIVALENT ROUND-SIZE 30"	542A5485
200	FOOT	PIPE CULVERTS, CLASS A, TYPE 1, EQUIVALENT ROUND-SIZE 36"	542A5491
2	EACH	PRECAST REINFORCED CONCRETE FLARED END SECTIONS 48"	54213693
2	EACH	PRECAST REINFORCED CONCRETE FLARED END SECTIONS- ELLIPTICAL, EQUIVALENT ROUND-SIZE 18"	54214713
4	EACH	PRECAST REINFORCED CONCRETE FLARED END SECTIONS- ELLIPTICAL, EQUIVALENT ROUND-SIZE 24"	54214719
8	EACH	PRECAST REINFORCED CONCRETE FLARED END SECTIONS- ELLIPTICAL, EQUIVALENT ROUND-SIZE 30"	54214725
8	EACH	PRECAST REINFORCED CONCRETE FLARED END SECTIONS- ELLIPTICAL, EQUIVALENT ROUND-SIZE 36"	54214731
70	FOOT	INSERTION CULVERT LINER 15"	54390120
179	CU YD	CONTROLLED LOW-STRENGTH MATERIAL	59300100
3	CAL MO	ENGINEERS FIELD LABORATORY	67000600
1	LUMP SUM	MOBILIZATION	67100100
1	L SUM	TRAFFIC CONTROL AND PROTECTION, STANDARD 701201	70100450
1	L SUM	TRAFFIC CONTROL AND PROTECTION, STANDARD BLR 21	70101830
1	L SUM	TRAFFIC CONTROL AND PROTECTION, STANDARD BLR 22	70101835

THE FOLLOWING STANDARDS ARE A PART OF THESE PLANS AND ARE INCLUDED AFTER SHEET NO. 23.

- 000001-05 STANDARD SYMBOLS, ABBREVIATIONS, AND PATTERNS
- 542301-02 PRECAST REINFORCED CONCRETE FLARED END SECTION
- 542306-02 PRECAST REINFORCED CONCRETE ELLIPTICAL FLARED END SECTION
- 701006-03 TYPICAL APPLICATION OF TRAFFIC CONTROL DEVICES
- 701201-03 TYPICAL APPLICATION OF TRAFFIC CONTROL DEVICES
- 701301-03 TYPICAL APPLICATION OF TRAFFIC CONTROL DEVICES
- 701901-01 TRAFFIC CONTROL DEVICES
- BLR 21-8 TYPICAL APPLICATION OF TRAFFIC CONTROL DEVICES
- BLR 22-6 TYPICAL APPLICATION OF TRAFFIC CONTROL DEVICES

SECTION 08-00119-00-FP  
BEGINS STA. 0+00.00  
ENDS STA. 141+73.70

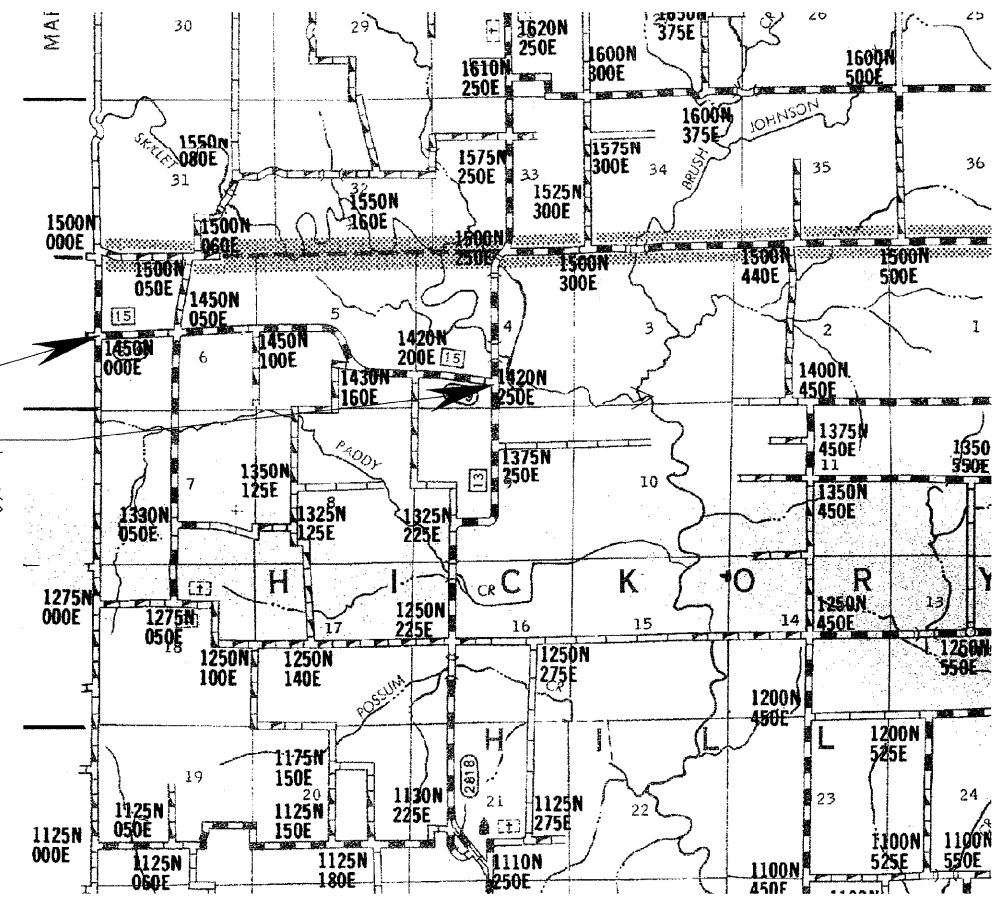

SCALES

- PLAN & PROFILE HORIZONTAL
- PROFILE VERTICAL
- CROSS SECTION

GROSS LENGTH	14173.7	FEET	2.684	MILES
OMISSIONS	0	FEET	0	MILES
NET LENGTH	14173.7	FEET	2.684	MILES

BEFORE DIGGING IN ILLINOIS  
...CALL JULIE FIRST AT 1-800-892-0123

WESTERN WAYNE WATER DISTRICT  
CONTACT: ROGER JOHNSON  
1-618-895-2813 (OFFICE)  
838-3655 (CELL)  
838-9511 (PAGER)

WABASH TELEPHONE COOP., INC.  
CONTACT: JEFF WILLIAMS  
1-618-665-3311 (OFFICE)  
1-618-665-4188 (FAX)

WAYNE / WHITE ELECTRIC  
CONTACT: AARON HAWLEY  
1-618-842-2196


FUNCTIONAL CLASS:

MAJOR COLLECTOR - RURAL  
ADT = 275  
DESIGN SPEED = 50 MPH

CONTRACT NO. 95632

R 5 E  
NOT TO SCALE

*Michael E. ...*  
ILL. REG. PROF. ENGINEER



062-053893  
REG. NO.  
EXPIRES: 11-30-2010  
NEIKIRK ENGINEERING, LLC  
306 NORTH MARKET STREET  
MT. CARMEL, ILLINOIS 62863

4-6-2010  
DATE

APPROVED: APRIL 23 20 10  
*Arthur J. ...*  
COUNTY ENGINEER

PASSED: April 26 20 10  
*Manuel ...*  
DISTRICT 7 ENGINEER OF LOCAL ROADS & STREETS

Releasing For  
Bid Based on  
Limited Review: April 26 20 10  
*Fogel & ...*

DEPUTY DIRECTOR OF HIGHWAYS,  
REGION FOUR ENGINEER  
STATE OF ILLINOIS  
DEPARTMENT OF TRANSPORTATION