


STA. 485+09.91  
 PR IL-25 / STEARNS RD  
 BEGIN PROJECT  
 BEGIN HOT-MIX ASPHALT  
 SURFACE REMOVAL,  
 VARIABLE DEPTH  
 REFER TO CROSS SECTIONS

\* DENOTES SIGNS REMOVED BY KANE COUNTY.  
 THE CONTRACTOR SHALL CONTACT RAY JOHNSON - KDOT AT 630-669-7912  
 A MINIMUM OF 72 HOURS PRIOR TO DESIRED TIME OF REMOVAL. THIS SHALL  
 BE DONE AT NO ADDITIONAL COST TO THE CONTRACT

**LEGEND**

	PAVEMENT REMOVAL
	AGGREGATE REMOVAL (PAID FOR AS EARTH EXCAVATION)
	DRIVEWAY PAVEMENT REMOVAL
	SIDEWALK REMOVAL
	CONCRETE REMOVAL (PAID FOR AS EARTH EXCAVATION)
	BUILDING REMOVAL
	BIKE PATH PAVEMENT REMOVAL
	HOT-MIX ASPHALT SURFACE REMOVAL, VARIABLE DEPTH
	CURB AND GUTTER REMOVAL
	GUARDRAIL REMOVAL
	FENCE REMOVAL
	DRAINAGE PIPE REMOVAL
	TREE REMOVAL
	CATCH BASIN REMOVAL
	MANHOLE REMOVAL
	BOLLARD REMOVAL
	STRUCTURE REMOVAL
	SIGN REMOVAL

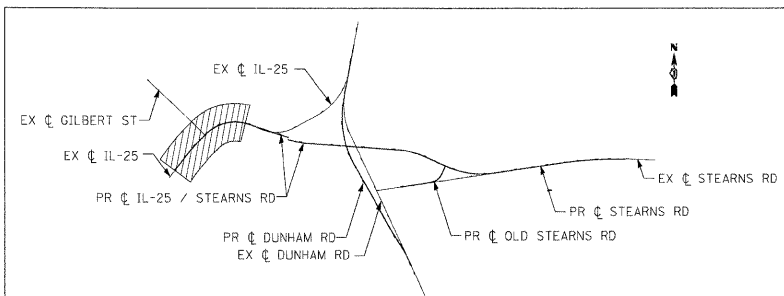

FILE NAME =  
 #FILES#

USER NAME = #USER#  
 DESIGNED - NMM  
 DRAWN - NMM  
 PLOT SCALE = 50.0000' / IN.  
 CHECKED - RMT  
 PLOT DATE = 3/30/2009  
 DATE - 3/31/09

REVISED -  
 REVISED -  
 REVISED -  
 REVISED -

**KANE COUNTY  
 DIVISION OF TRANSPORTATION**

**REMOVAL PLAN  
 IL 25 / STEARNS ROAD**

SCALE: SHEET NO. OF SHEETS STA. 485+09.91 TO STA. 498+50.00

F.A. RTE.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
361	06-00214-15-BR	KANE/DUPAGE	545	80
CONTRACT NO. 63074				
FED. ROAD DIST. NO. ILLINOIS FED. AID PROJECT				

x:\39003\3944\engineer\road\removal\pr\pr.in-abc.stn\_r-rem\_01.dgn