ROADWAY PROFILE VIFW

ROADWAY CROSS SECTION VIFW

PAVEMENT


SUBBASE MATERIAL

CA7 OR CA11

CRUSHED STONE

PAVED

SHOULDER

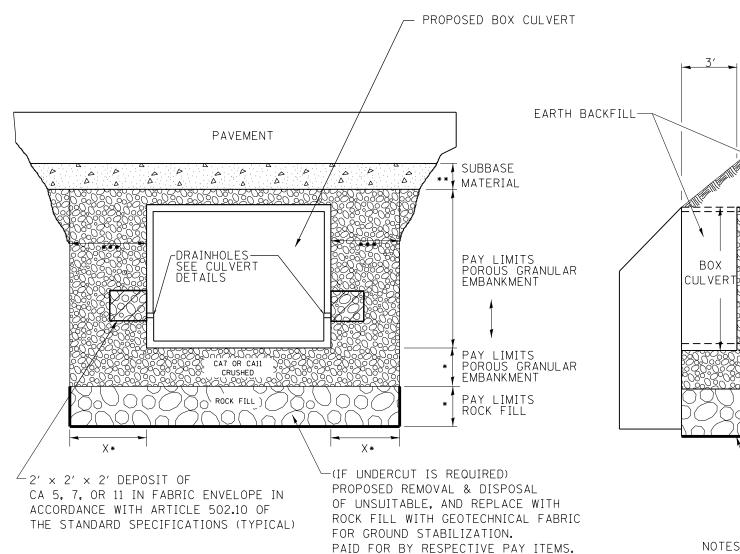

- * IF APPLICABLE, SEE UNDERCUT DETAIL FOR DEPTHS AND WIDTHS. IF THERE IS NO UNDERCUT, X = 2 FEET AND SEE NOTE 3 THIS SHEET.
- ** SUBBASE SHALL BE 6" MINIMUM LAYER OF CA6 CRUSHED STONE OR OTHER MATERIAL AS SPECIFIED IN THE PLANS.
- *** PAY LIMITS OF POROUS GRANULAR EMBARKMENT SHALL BE 2 FEET UNLESS OTHERWISE SHOWN IN THE PLANS.

一()()() JROCK FILL (IF UNDERCUT IS REQUIRED) GEOTECHNICAL FABRIC FOR GROUND STABILIZATION

PAVED

SHOULDER

NOTES:

- EXCEPT AS SPECIFIED IN THIS DETAIL, THE PLACEMENT AND COMPACTION OF BACKFILL SHALL BE IN ACCORDANCE WITH ARTICLE 502.10 OF THE STANDARD SPECIFICATIONS.
- POROUS GRANULAR EMBARKMENT SHALL BE PLACED IN ACCORDANCE WITH SECTION 207 OF THE STANDARD SPECIFICATIONS. 2.
- IF NO UNDERCUT IS REQUIRED, A 6" MINIMUM LAYER OF POROUS GRANULAR EMBANKMENT SHALL BE PLACED BELOW THE ELEVATION OF THE BOTTOM OF BOX CULVERT.

All dimensions are in inches (millimeters) unless otherwise noted.

EARTH BACKFILL

	6-12-12	CREATED NEW STD.	R.D.			F.A.	SECTION	COUNTY	TOTAL SHEET
i L				STATE OF ILLINOIS	DETAIL OF EXCAVATION AND BACKFILL FOR BOX CULVERTS				0.122.13
L				DEPARTMENT OF TRANSPORTATION		CONTRAC		CONTRACT	NO.
L					NOT TO SCALE CADD STD. 540000	FED. ROAD D	DIST. NO. ILLINOIS FED. AI	D PROJECT	