


STATION	REMARKS	LENGTH OF PATCH		HMA REMOVAL OVER PATCHES - 7 1/2" 44002230		HMA REPLACEMENT OVER PATCHES - 7 1/2" 40601005		
		FOOT	FOOT	SQ YD	SQ YD	TON	TON	
		LT LANE	RT LANE	LT LANE	RT LANE	LT LANE	RT LANE	
IL 75								
10610+ 92			6		10.1		4.25	
10617+ 20			6		10.1		4.25	
10624+ 56			15	15	23.1	23.1	9.71	
10629+ 39			6	6	10.1	10.1	4.25	
10639+ 50			6	6	10.1	10.1	4.25	
10641+ 15				8		13.0	5.46	
10644+ 30				6		10.1	4.25	
10650+ 05			6	6	10.1	10.1	4.25	
10666+ 22			6	6	10.1	10.1	4.25	
10674+ 05			6	6	10.1	10.1	4.25	
10692+ 89				6		10.1	4.25	
10695+ 40			6	6	10.1	10.1	4.25	
10696+ 89			6	6	10.1	10.1	4.25	
10709+ 05				6		10.1	4.25	
10729+ 68			8	8	13.0	13.0	5.46	
10732+ 42			30	30	44.8	44.8	18.81	
10751+ 05				6		10.1	4.25	
10754+ 08			6		10.1		4.25	
10759+ 45			6		10.1		4.25	
10762+ 35			6	6	10.1	10.1	4.25	
10769+ 15			6	6	10.1	10.1	4.25	
10770+ 49			6	6	10.1	10.1	4.25	
10773+ 04			6	6	10.1	10.1	4.25	
10774+ 57				8		13.0	5.46	
10780+ 55			6	6	10.1	10.1	4.25	
10784+ 51			6	6	10.1	10.1	4.25	
10786+ 21	Kleever Rd.							
10786+ 74				6		10.1	4.25	
10792+ 14			6	6	10.1	10.1	4.25	
10792+ 77			6	6	10.1	10.1	4.25	
10794+ 05			6	6	10.1	10.1	4.25	
10803+ 45			8	8	13.0	13.0	5.46	
10804+ 84			6	6	10.1	10.1	4.25	
10805+ 29				6		10.1	4.25	
10808+ 21			6	6	10.1	10.1	4.25	
10809+ 71			6	6	10.1	10.1	4.25	
10811+ 51			10	10	15.9	15.9	6.67	
10815+ 09			8	8	13.0	13.0	5.46	
10816+ 85			6	6	10.1	10.1	4.25	
10817+ 21			6	6	10.1	10.1	4.25	
10817+ 81			8	8	13.0	13.0	5.46	
10820+ 41				15		23.1	9.71	
10821+ 41			6	6	10.1	10.1	4.25	
10822+ 66			6	6	10.1	10.1	4.25	
10823+ 41			6	6	10.1	10.1	4.25	
TOTAL FOR STEPHENSON COUNTY					408.8	498.3	171.7	209.3

STATION	REMARKS	LENGTH OF PATCH		HMA REMOVAL OVER PATCHES - 7 1/2" 44002230		HMA REPLACEMENT OVER PATCHES - 7 1/2" 40601005		
		FOOT	FOOT	SQ YD	SQ YD	TON	TON	
		LT LANE	RT LANE	LT LANE	RT LANE	LT LANE	RT LANE	
10824+ 81			6		10.1		4.25	
10826+ 03			6	6	10.1	10.1	4.25	
10831+ 11			6	6	10.1	10.1	4.25	
10832+ 67			6	6	10.1	10.1	4.25	
10834+ 41			6	6	10.1	10.1	4.25	
10835+ 91			6		10.1		4.25	
10840+ 61			6	6	10.1	10.1	4.25	
10841+ 45			6	6	10.1	10.1	4.25	
10842+ 61			6	6	10.1	10.1	4.25	
10843+ 51			6	6	10.1	10.1	4.25	
10844+ 51			6	6	10.1	10.1	4.25	
10844+ 75			6	6	10.1	10.1	4.25	
10846+ 91			6	6	10.1	10.1	4.25	
10852+ 30			6	6	10.1	10.1	4.25	
10852+ 48			8	8	13.0	13.0	5.46	
10855+ 02			8	8	13.0	13.0	5.46	
10860+ 68			8	8	13.0	13.0	5.46	
10875+ 86	Best Rd.							
10890+ 92			6	6	10.1	10.1	4.25	
10894+ 16			8	8	13.0	13.0	5.46	
10897+ 12			6	6	10.1	10.1	4.25	
10897+ 92			6	6	10.1	10.1	4.25	
10898+ 56			6	6	10.1	10.1	4.25	
10899+ 76			6	6	10.1	10.1	4.25	
10900+ 96			6	6	10.1	10.1	4.25	
10904+ 36			6	6	10.1	10.1	4.25	
10905+ 63				10		15.9	6.67	
10906+ 38			10	10	15.9	15.9	6.67	
10907+ 71			8	8	13.0	13.0	5.46	
10909+ 40			6	6	10.1	10.1	4.25	
TOTAL FOR WINNEBAGO COUNTY					303.3	309.1	127.4	129.8
TOTAL FOR PROJECT					712.1	807.4	299.1	339.1

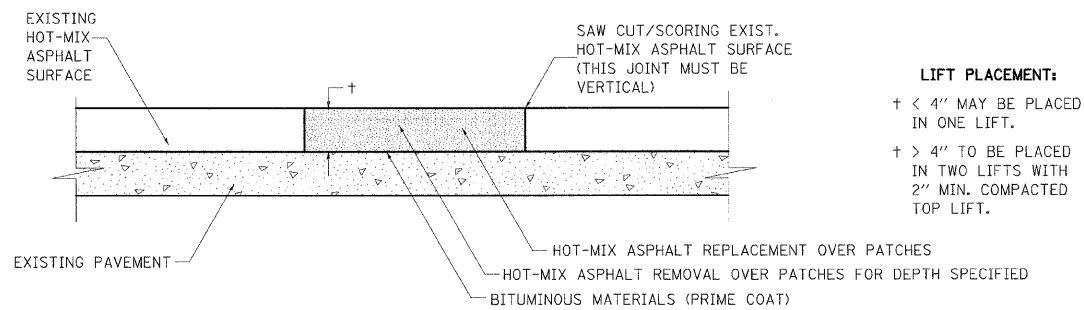

SEQUENCE OF CONSTRUCTION:

1. REMOVE THE EXISTING HOT-MIX ASPHALT SURFACE.
2. REPLACE HOT-MIX ASPHALT WITH "HOT-MIX ASPHALT REPLACEMENT OVER PATCHES" AT LOCATIONS OF "HOT-MIX ASPHALT SURFACE REMOVAL, 8"

GENERAL NOTES:

1. BITUMINOUS MATERIALS (PRIME COAT) IS INCLUDED IN THE COST OF HOT-MIX ASPHALT REPLACEMENT OVER PATCHES.

ALL DIMENSIONS ARE IN MILLIMETERS (INCHES) UNLESS OTHERWISE NOTED.

PAVEMENT PATCHING FOR HOT-MIX ASPHALT SURFACED PAVEMENT DETAIL

REVISIONS	
NAME	DATE

ILLINOIS DEPARTMENT OF TRANSPORTATION
F.A.P. ROUTE 505 (IL 75)

PAVEMENT PATCHING SCHEDULE

SCALE: VERT.
HORIZ.
DATE: 3/3/09

DRAWN BY MTH
CHECKED BY SPF