

DEPARTMENT OF TRANSPORTATION

DIVISION OF HIGHWAYS

PROPOSED HIGHWAY PLANS

F.A.I. ROUTES 155 (I-155)

SECTION: 90-[(106X)HB]P

COUNTY: TAZEWELL

C-94-062-09




INDEX OF SHEETS

- 1) COVER SHEET
- 2) COMMITMENT SHEET/GENERAL NOTES
- 3) SUMMARY OF QUANTITIES
- 4 & 5 PLAN SHEETS

TRAFFIC STANDARDS

- 701101-02
- 701106-02
- 701201-03
- 701601-06
- 701901-01

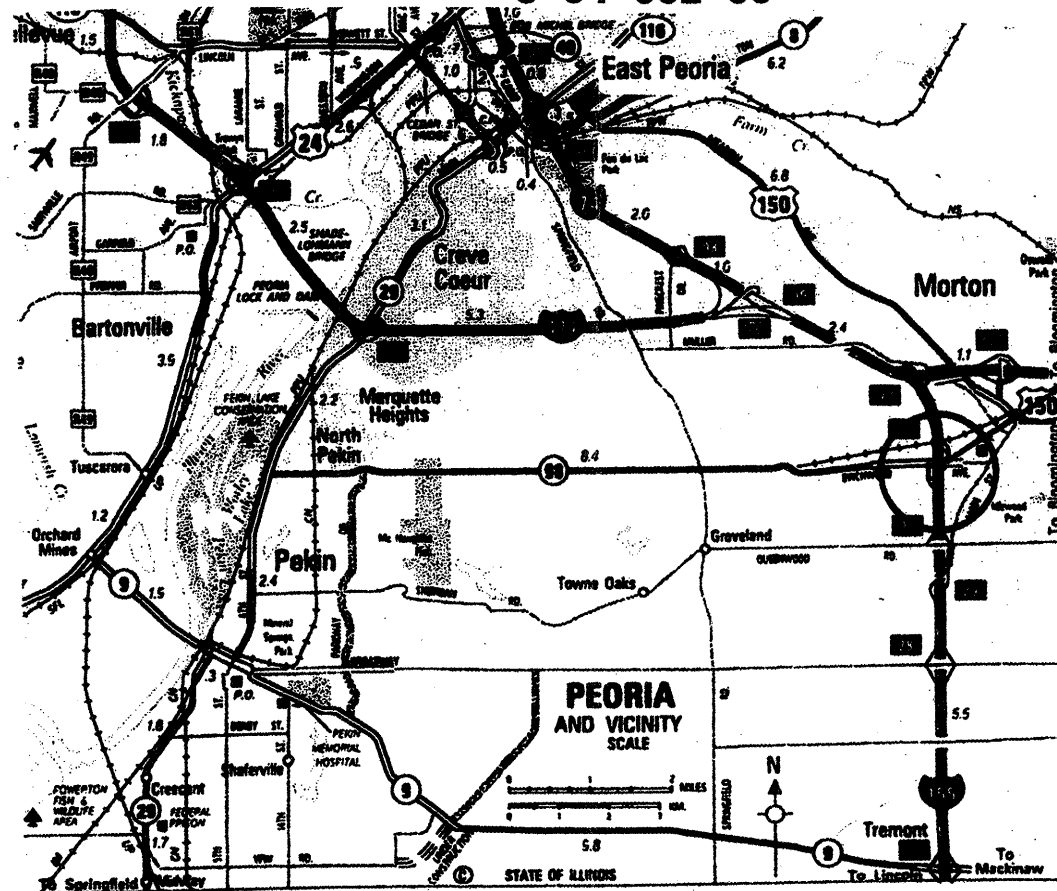

090-0128 & 090-0129

DESIGNER: TOM INGLIS 309-671-3481

ADT

I-155 21,000 TOTAL, 3000 TRUCKS

CONTRACT NO. 68875

CATALOG NO. 034217-00D

J.U.L.I.E.

JOINT UTILITY LOCATION INFORMATION FOR EXCAVATION

1-800-892-0123

PRINTED BY THE AUTHORITY OF THE STATE OF ILLINOIS

STATE OF ILLINOIS DEPARTMENT OF TRANSPORTATION DIVISION OF HIGHWAYS

SUBMITTED

May 18, 20 09

DISTRICT ENGINEER

May 8, 20 09

Charles J. Ingersoll

ENGINEER OF DESIGN AND ENVIRONMENT

May 8, 20 09

Christine M. Reed

DIRECTOR, DIVISION OF HIGHWAYS

COMMITTMENTS

ROUTE	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
I-155	90-[(106X)HB]P	TAZEWELL	5	2

No commitments have been made for this project.

GENERAL NOTES

Cleaning & painting of the existing steel shall be as specified in the special provision for "Cleaning and Painting Existing Steel Structures". All beams, bearings, and all other structural steel shall be cleaned per Near White Blast Cleaning – SSPC SP 10 according to the following schedule.

Bridge 1 & 2 – Entire Structure, except the previously metalized beam ends

The designated paint system shall be Paint System 5 – MCU.
The final finish coat for the interior and exterior shall be according to the following schedule:

Bridge No. 1 & 2 – Paint system 5 shall be used and all exterior fascias including the bottom of the bottom flanges shall be blue (Munsell No. 10B 3/6). All of the underside shall be painted Gray (Munsell No. 5B 7/1).

SSPC QP1 & QP2 PAINTING CONTRACTOR CERTIFICATIONS ARE NOT REQUIRED FOR THIS CONTRACT

AIR MONITORS – None for this project

**COMMITMENTS &
GENERAL NOTES**

Summary of Quantities

Code Order



ROUTE		SECTION	COUNTY	SHEET	
FAI	155	90-[(106X)HB]P	TAZEWELL	TOTAL	NO.
I	155			5	3
			CONTRACT NO.	68875	

CONSTRUCTION TYPE CODE

090-0128	090-0129
SFTY-2A	SFTY-2A
100%	100%
STATE	STATE

CODE No.	ITEM	UNIT	Tot.QTY		
50600600	CLEANING AND PAINTING STEEL BRIDGE NO. 1	L SUM	1	1	
50600700	CLEANING AND PAINTING STEEL BRIDGE NO. 2	L SUM	1		1
67100100	MOBILIZATION	L SUM	1	0.5	0.5
70102630	TRAFFIC CONTROL AND PROTECTION, STANDARD 701601	L SUM	1	0.5	0.5
X0323984	PORTABLE TEMPORARY BARRIER SYSTEM	FOOT	319	319	
X0323985	RELOCATE PORTABLE TEMPORARY BARRIER SYSTEM	FOOT	519	100	419
X5060601	CONTAINMENT AND DISPOSAL OF NON-LEAD PAINT CLEANING RESIDUES NO.1	L SUM	1	1	
X5060602	CONTAINMENT AND DISPOSAL OF NON-LEAD PAINT CLEANING RESIDUES NO.2	L SUM	1		1
X7015005	CHANGEABLE MESSAGE SIGN	CAL DA	3	3	

ROUTE	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
I - 155	90-[(106X)HB]P	TAZEWELL	5	4

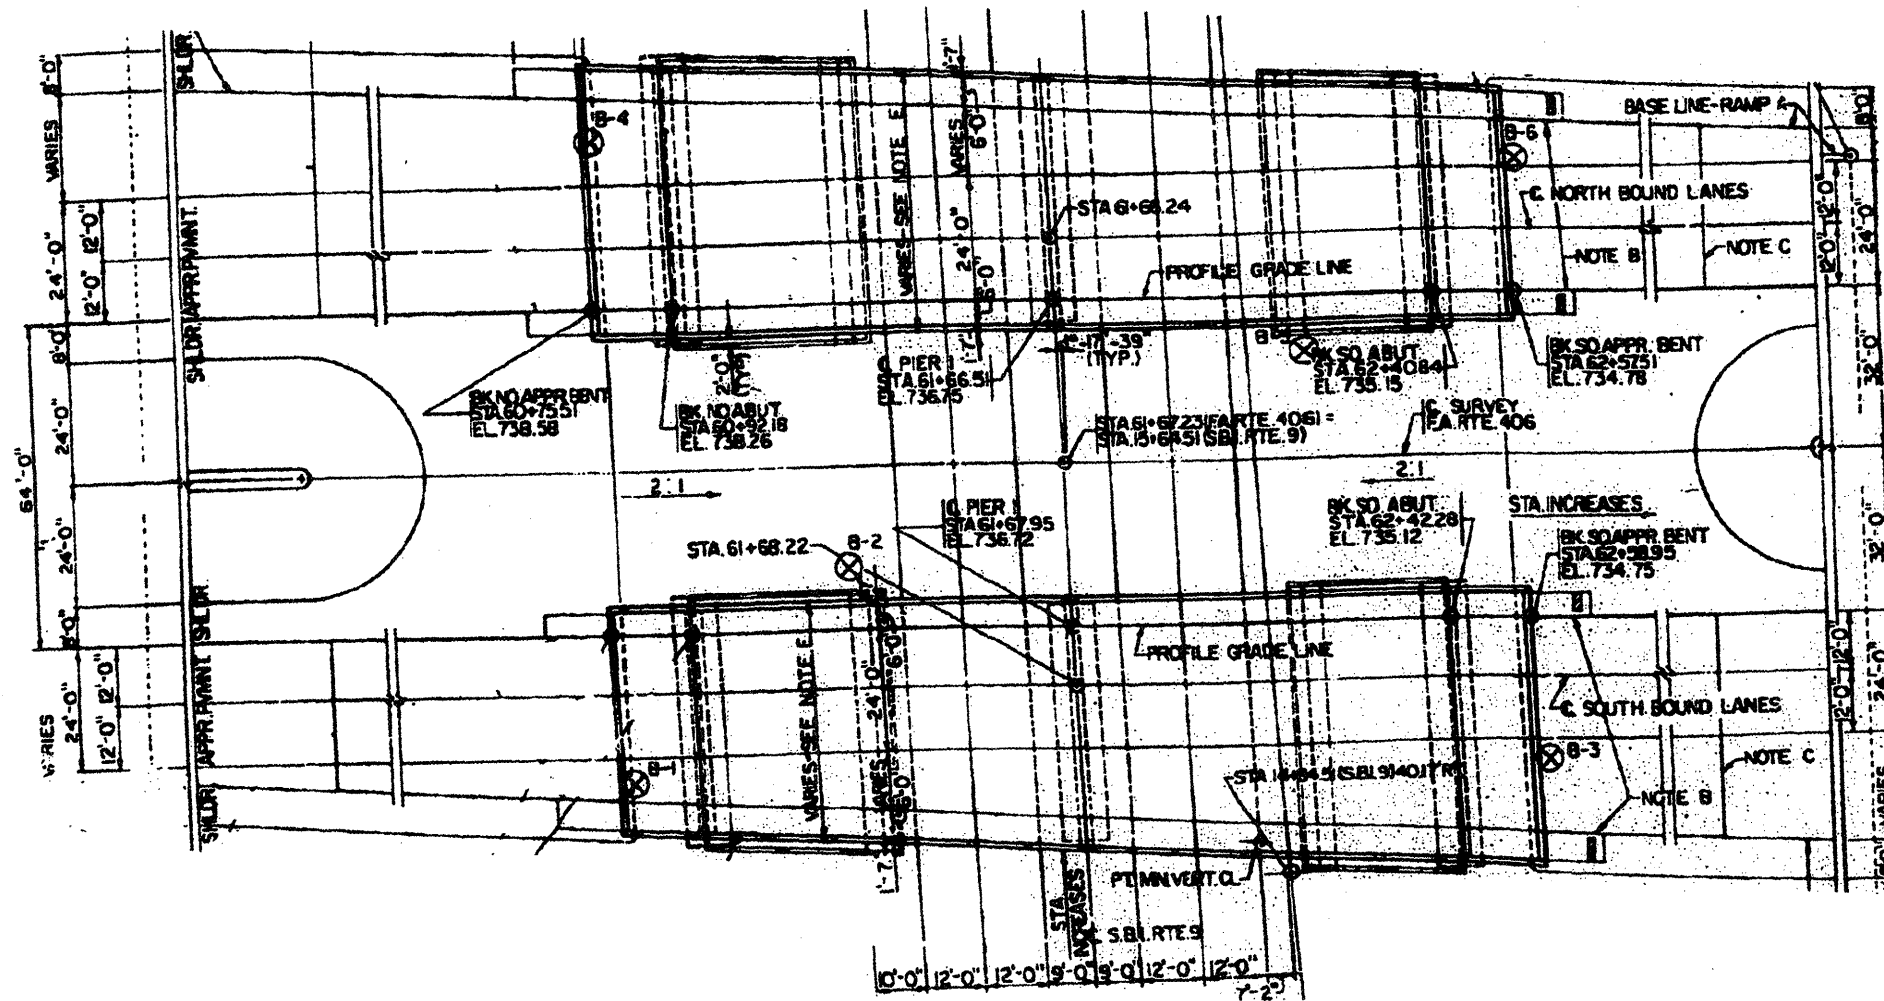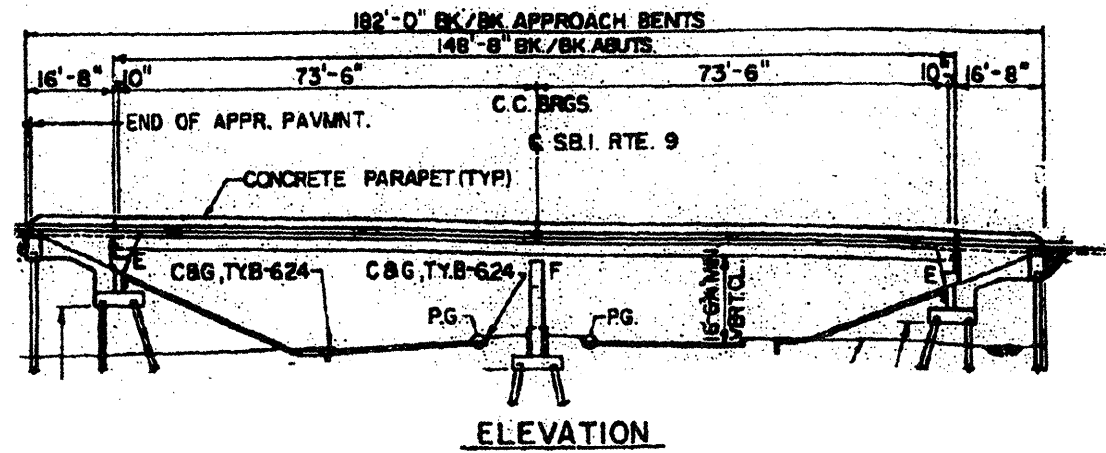

FOR INFORMATION ONLY - 090-0128 & 090-0129

PLAN SHEETS

