
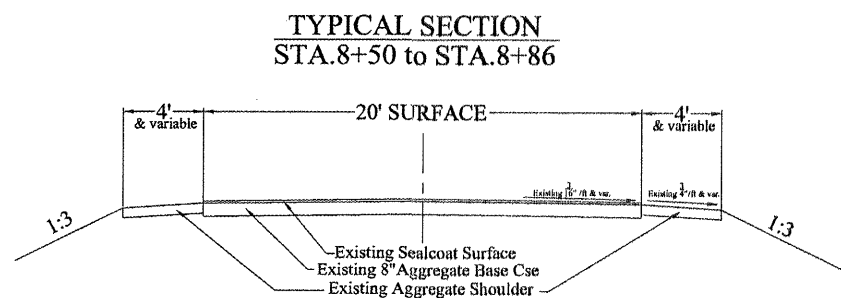
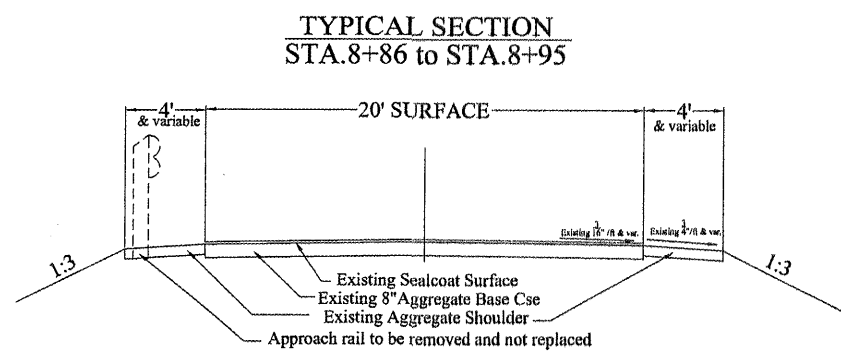
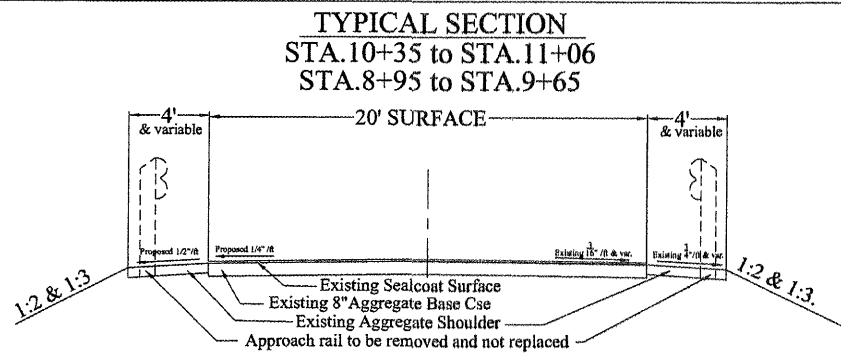
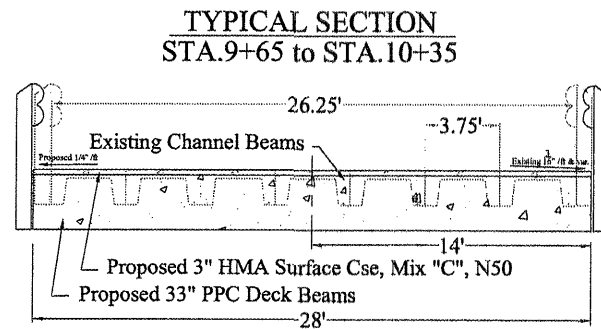


COUNTY	ROUTE	CONTRACT	SHEET
KNOX	CH-16	89427	2 OF 12

SEC.05-00096-01-BR

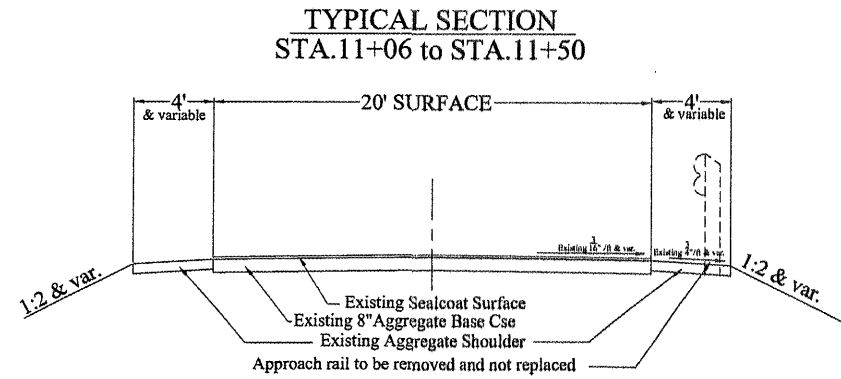

SUMMARY OF QUANTITIES

X081-2A

QUANT.	UNIT	ITEMS	CODE NUMBER
25	POUND	Temporary Erosion Control Seeding	28000250
4	EACH	Temporary Ditch Checks	28000300
257	SQ YD	Stone Dumped Riprap, Class A4	28100707
27	TON	Hot- mix asphalt Surface Course, Mix "C", N50	40603310
1	EACH	Removal of Existing Structures	50100100
24.2	CU YD	Concrete Structures	50300225
2240	SQ FT	Precast Prestressed Concrete Deck Beams (33" Depth)	50400605
2880	POUND	Reinforcement Bars, epoxy coated	50800205
160	FOOT	Steel Railing, Type S1	50900205 *
445	FOOT	Furnishing Metal Shell Piles 12" x 0.250"	51200957
445	FOOT	Driving Piles	51202305
1	EACH	Test Pile Metal shells	51203200
1	EACH	Name Plates	51500100
249	SQ YD	Waterproofing Membrane System	58100200
480	FOOT	Portland Cement Mortar Fairing Course	58300100
1	L.SUM	Mobilization	67100100

* Specialty Items