



FIRST STREET

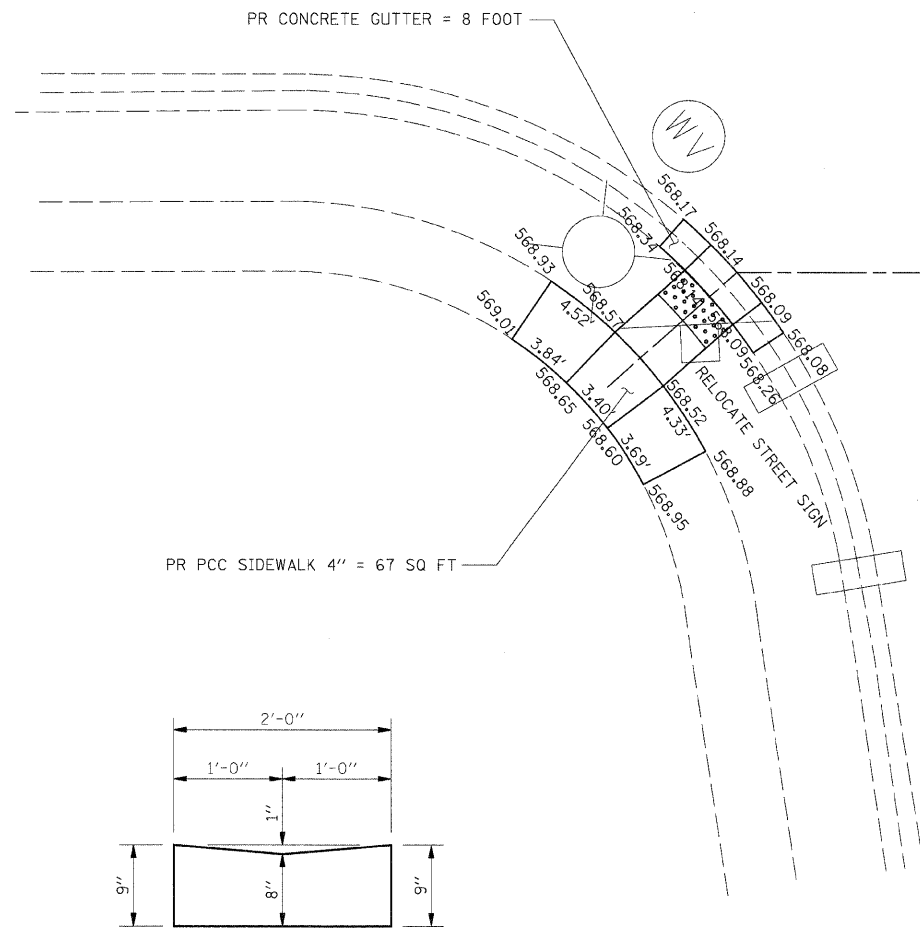

NOTE:
 PR PCC SIDEWALKS AND RAMPS
 TO BE 4' WIDE AND 4" THICK.
 RAMP SLOPES 8.33% (1:12) TYP.
 COSTS FOR INCIDENTAL EARTHWORK
 AND SEEDING TO BE INCLUDED IN THE
 COST FOR PCC SIDEWALK 4'.
 ALL MEASUREMENTS ON CURVES
 ARE CHORD DISTANCES.

PR CONCRETE GUTTER = 8 FOOT

PR PCC SIDEWALK 4" = 67 SQ FT



CONCRETE GUTTER
 CONCRETE GUTTER 4' @ RAMP
 w/ 2' TRANSITION TO EXISTING,
 8' TOTAL LENGTH EACH.

PARTRIDGE PASS

BILL OF MATERIALS

TOTAL PCC SIDEWALK 4"	= 134 SQ FT
TOTAL SIDEWALK REMOVAL	= 92 SQ FT
TOTAL CONCRETE GUTTER	= 16 FT
TOTAL GUTTER REMOVAL	= 16 FT
DETECTABLE WARNING	= 16 SQ FT
SIGN TO BE RELOCATED	= 2 SQ FT

FILE NAME =	USER NAME = IE Consultants	DESIGNED -	REVISED -
Gr:\S07009-01\lead\7009-01_Ent_Detail05.dwg		DRAWN -	REVISED -
		CHECKED -	REVISED -
		DATE -	REVISED -

VILLAGE OF SHERMAN

**RAMP SIDEWALK
 DETAILS**

SCALE:	SHEET NO.	OF	SHEETS	STA.	TO STA.
--------	-----------	----	--------	------	---------

F.A. RTE.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
	08-00014-00-SW	SANGAMON	47	41
FED. ROAD DIST. NO. [ILLINOIS] FED. AID PROJECT			CONTRACT NO. 93486	