


F.A.P. RTE.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
--	06-00045-00-SW	COOK	11	10
FEDERAL RD. DIST. NO.	ILLINOIS		FEDERAL AID PROJECT	
CONTRACT: 83966				

**CONSTRUCTION NOTES**

- A. Slope 3/4" / Ft.
- B. 2 - #4 Bars Continuous, Optional.
- C. 2 Dowel Bars at Expansion Joints.
- D. Min. 2" Aggr. Base.
- E. Min. 6-Bag Mix Concrete.
- F. Depressed Curb Configuration.

**GENERAL NOTES**

- 1. Standard Curb and Gutter Shall be Used For All New Construction. Roll-Type Curb and Gutter is Not Acceptable.
- 2. Preformed Expansion Joints of 3/4" Thickness Shall be Spaced a Maximum of 40' Apart, and at All Radius Points and 4' Either Side of Inlets.
- 3. Formed or Saw-Cut Contraction Joints Shall be Spaced a Maximum of 10' Apart and Filled with a Silicone Sealant.
- 4. Concrete Barrier-Type Curb and Gutter Shall be Provided for All Parking Lots Accomodating Five (5) or More Parking Spaces.

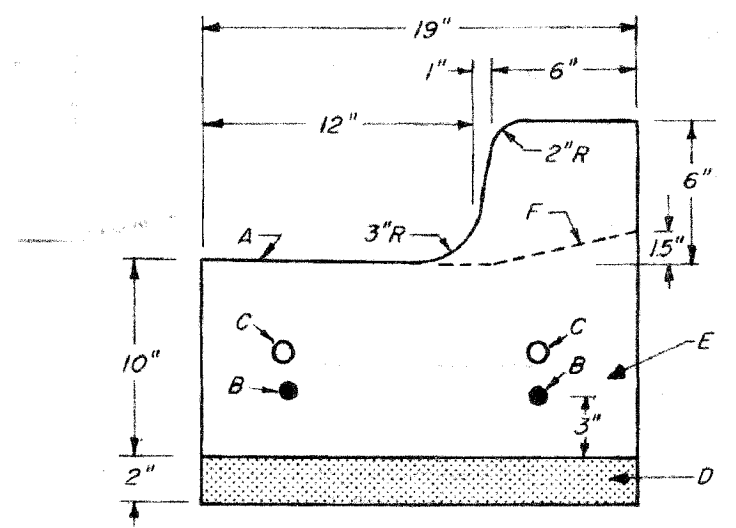

**STANDARD CURB AND GUTTER**

<b>CURB AND GUTTER DETAIL</b>
ISSUED: March 1988 REVISED: August 2003
DWG. R-6-1

Scale For Manufacturing  
Millimeters  
Inches

COPYRIGHT © 2007 BURNS & MCDONNELL ENGINEERING COMPANY, INC.



date 05-15-07	detailed D. CHAVEZ
designed J.LeROY	checked A.BRYANT



<b>VILLAGE of NORTHFIELD</b>	
2005 HAPP ROAD CMAQ MISCELLANEOUS DETAILS (3 OF 4)	
project 42272	contract
drawing <b>C007</b>	rev.
sheet 10 of 11 sheets	file 42272C007.dwg