

# CONSTRUCTION PLANS FOR CASEY MUNICIPAL AIRPORT


## CASEY, CLARK COUNTY, ILLINOIS

REHABILITATE PARALLEL AND CONNECTING TAXIWAYS;  
RECONSTRUCT HANGAR ACCESS PAVEMENT;  
APRON CRACK SEALING

SUMMARY OF QUANTITIES				
ITEM NO.	DESCRIPTION	UNIT	AS BID QUANTITY	AS BUILT QUANTITY
AR150530	TRAFFIC MAINTENANCE	L. SUM	1	
AR152410	UNCLASSIFIED EXCAVATION	CU. YD.	169	
AR152455	EMBANKMENT IN PLACE	CU. YD.	106	
AR156513	SEPARATION FABRIC	SQ. YD.	732	
AR201660	BITUMINOUS CRACK REPAIR	LIN. FT.	5,175	
AR201666	BASE COURSE CRACK REPAIR	SQ. YD.	81.7	
AR209510	CRUSHED AGGREGATE BASE COURSE	TON	417	
AR401110	PAVEMENT PREPARATION	L. SUM	1	
AR401610	BITUMINOUS SURFACE COURSE	TON	1,113	
AR401655	BUTT JOINT CONSTRUCTION	SQ. YD.	688	
AR401901	REMOVE BITUMINOUS SURFACE COURSE	SQ. YD.	91	
AR501900	REMOVE PCC PAVEMENT	SQ. YD.	532	
AR602510	BITUMINOUS PRIME COAT	GAL.	256	
AR603510	BITUMINOUS TACK COAT	GAL.	375	
AR620520	PAVEMENT MARKING-WATERBORNE	SQ. FT.	1,994	
AR620525	PAVEMENT MARKING - BLACK BORDER	SQ. FT.	322	
AR901510	SEEDING	ACRE	0.7	
AR908510	MULCHING	ACRE	0.7	

ILLINOIS PROJECT NO. 1H8-3858  
AIP PROJECT NO. 3-17-0014-B9

APRIL 24, 2009

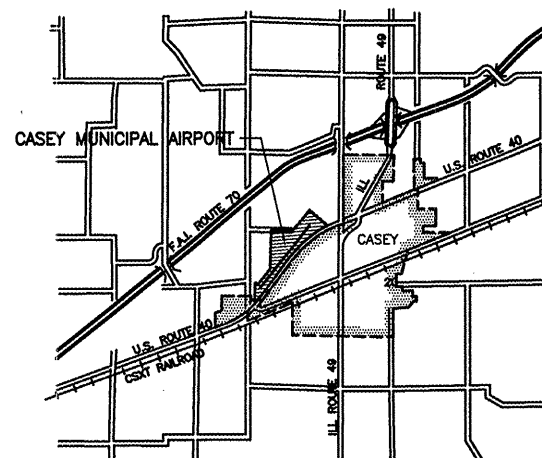

VICINITY MAP

INDEX OF SHEETS	
NO.	DESCRIPTION
1	COVER SHEET
2	IMPROVEMENT AND SAFETY PLAN
3	TYPICAL SECTIONS AND SPECIAL DETAILS
4	TAXIWAYS A AND B PLAN AND PROFILE
5	HANGAR ACCESS PAVEMENT LAYOUT
6	INTERSECTION ELEVATIONS
7	TAXIWAY MARKING
8	TAXIWAY A CROSS SECTIONS
9-12	TAXIWAY B CROSS SECTIONS
13	HANGAR ACCESS PAVEMENT CROSS SECTIONS

	PLANS PREPARED BY :	CITY OF CASEY, ILLINOIS
	HUTCHISON ENGINEERING, INC. JACKSONVILLE, ILLINOIS	APPROVED <i>David L. Bolin</i> MAYOR DATE <i>April 13, 2009</i>
	SUBMITTED <i>Gary L. Hutchison</i> DATE <i>April 10, 2009</i>	APPROVED <i>David M. Keller</i> CITY CLERK DATE <i>April 12, 2009</i>