

INDEX OF SHEETS

- S1. General Plan & Elevation
- S2. General Notes
- S3. Deck Plan
- S4. Superstructure Details
- S5. Approach Details (1 of 2)
- S6. Approach Details (2 of 2)
- S7. Preformed Joint Strip Seal
- S8. Aluminum Railing, Type L
- S9. Framing Plan
- S10. 27" x 36" PPC Deck Beam
- S11. 27" x 36" PPC Deck Beam Details
- S12. Substructure Repair
- S13. Existing Bridge Plans (1 of 2)
- S14. Existing Bridge Plans (2 of 2)

GENERAL NOTES

1. Reinforcement bars shall conform to the requirements of ASTM A 706 Gr 60. See Special Provisions.
2. Reinforcement bars designated (E) shall be epoxy coated.
3. Plan dimensions and details relative to existing plans are subject to nominal construction variations. The Contractor shall field verify existing dimensions and details affecting new construction and make necessary approved adjustments prior to construction or ordering of materials. Such variations shall not be cause for additional compensation for a change in scope of the work, however, the Contractor will be paid for the quantity actually furnished at the unit price bid for the work.
4. Slipforming of the parapets is not allowed.
5. The minimum thickness of the Concrete Overlay shall be 4 inches and varies as required to adjust for the new Cross Slope and Beam Camber.
6. If the Contractor's procedures for existing deck beam removal involves placement of heavy equipment on the existing deck beams, a detailed procedure shall be submitted to the Engineer for approval. The procedure shall include calculations, sealed by an Illinois Licensed Structural Engineer, verifying the structural adequacy of the beams for the proposed loads. Cost included with Removal of Existing Superstructures.
7. No in-stream work will be allowed.

TOTAL BILL OF MATERIAL


ITEM	UNIT	SUPER	SUB	TOTAL
Removal of Existing Superstructures	Each	1		1
Concrete Removal	Cu Yd		3.6	3.6
Bridge Rail Removal	Foot	196		196
Concrete Superstructure	Cu Yd	42.3		42.3
Bridge Deck Grooving	Sq Yd	139		139
Protective Coat	Sq Yd	320		320
Precast Prestressed Concrete Deck Beams (27" Depth)	Sq Ft	1877		1877
Reinforcement Bars, Epoxy Coated	Pound	8580		8580
Aluminum Railing, Type L	Foot	180		180
Name Plates	Each	1		1
Preformed Joint Strip Seal	Foot	40.5		40.5
Epoxy Crack Injection	Foot	60		60
Concrete Wearing Surface, 5"	Sq Yd	214		214
Asbestos Bearing Pad Removal	Each	28		28
Structural Repair of Concrete (Depth Equal to or Less Than 5 Inches)	Sq Ft		5	5

STATION 205+97.10
 REBUILT 20 BY
 STATE OF ILLINOIS
 F.A.U. RTE. 2760 SEC. 100-B-1
 LOADING HL-93
 STRUCTURE NO. 016-0814


NAME PLATE

See Std. 515001

Existing Name Plate shall be cleaned and relocated next to new Name Plate. Cost included with Name Plates.
 See Sheet S1 for Name Plate location.

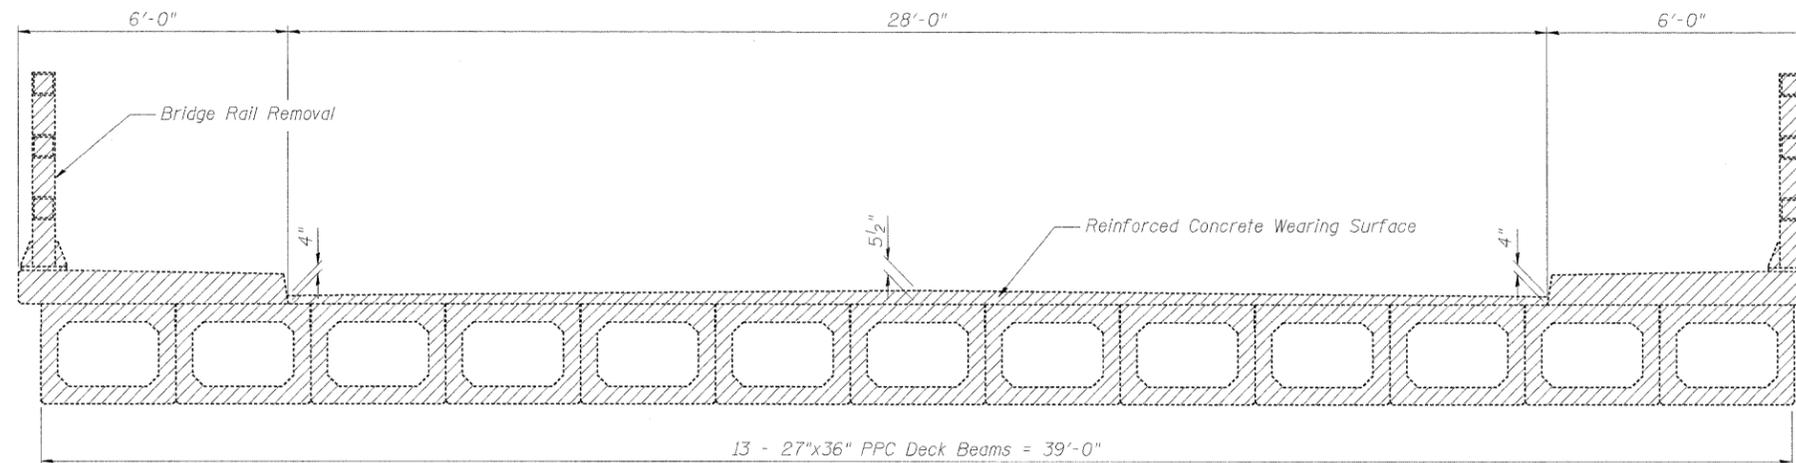

REMOVAL OF EXISTING SUPERSTRUCTURE

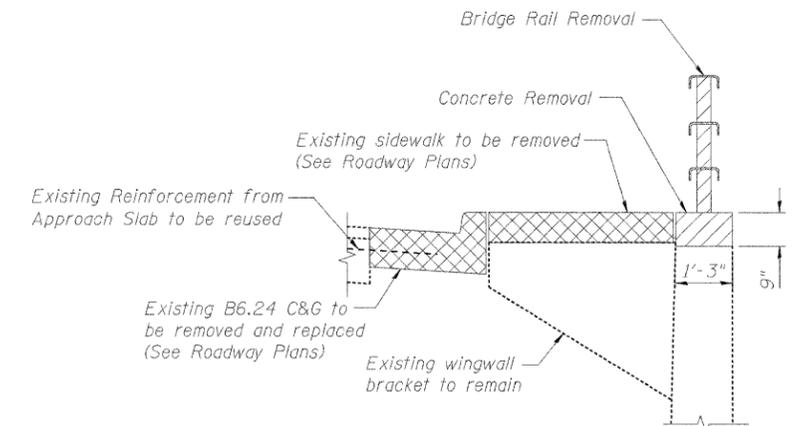

SIDEWALK REMOVAL AT APPROACHES

FILE NAME = g:\projects\2102195_010\cadd\structure\0160814-002-General Notes.dgn

	USER NAME = z2ayerb	DESIGNED - BPS	REVISED -	STATE OF ILLINOIS DEPARTMENT OF TRANSPORTATION	GENERAL NOTES S.N. 016-0814	F.A.U. RTE. 2760	SECTION 100-B-1	COUNTY COOK	TOTAL SHEETS 28	SHEET NO. 12
	PLOT SCALE = N/A	DRAWN - BPS	REVISED -			SHEET NO. S2 OF 14 SHEETS	ILLINOIS FED. AID PROJECT	CONTRACT NO. 60M80		
	PLOT DATE = 8/31/2011	CHECKED - GSP	REVISED -							