



F.A.P. RTE.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
351	2008-001VB	COOK	579	27
STA.	TO STA.			
FED. ROAD DIST. NO.	ILLINOIS	FED. AID PROJECT		

CONTRACT NO. 60E10

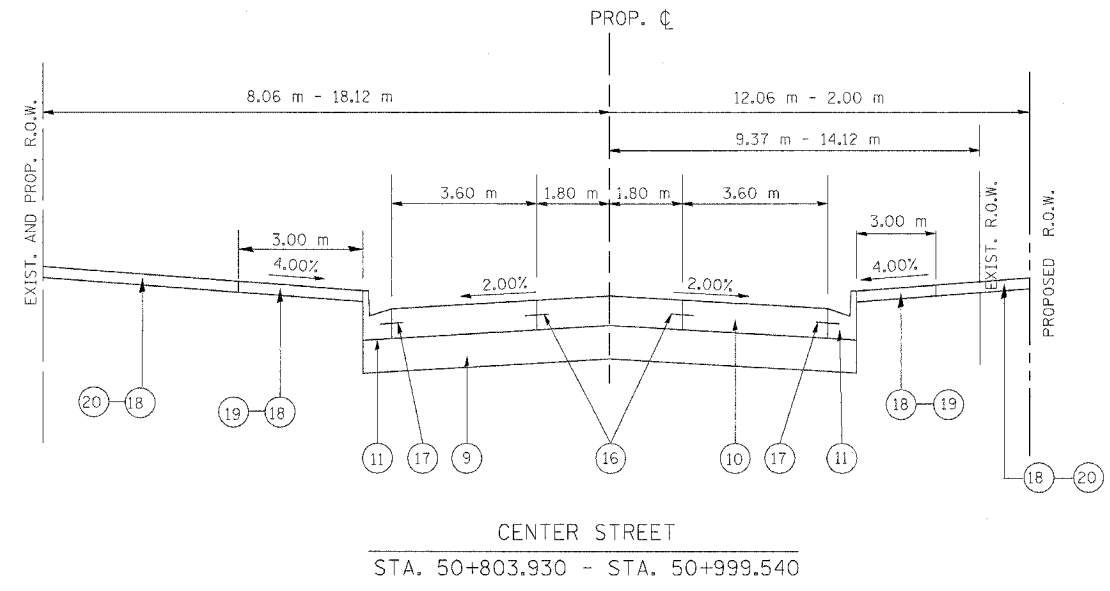

LEGEND - PROPOSED

- ① EXIST. P.C.C. BASE COURSE, 225-250 mm
- ② EXIST. HOT-MIX ASPHALT SURFACE, 125 mm
- ③ EXIST. CONCRETE CURB AND GUTTER
- ⑨ AGGREGATE SUBGRADE, 300 mm
- ⑩ PORTLAND CEMENT CEMENT PAVEMENT 260 mm (JOINTED)
- ⑪ COMBINATION CONCRETE CURB AND GUTTER, TYPE B-15.60
- ⑬ PORTLAND CEMENT CONCRETE SIDEWALK 125 mm
- ⑮ SAWED LONGITUDINAL JOINT WITH 750 mm DEFORMED EPOXY-COATED No. 19 TIE BARS @ 750mm CTS.
- ⑯ LONGITUDINAL CONSTRUCTION JOINT WITH 600 mm GROUTED IN PLACE DEFORMED EPOXY-COATED No. 19 TIE BARS @ 600 mm CTS.
- ⑰ 600 mm DEFORMED EPOXY-COATED No. 19 TIE BARS @ 600 mm CTS.
- ⑱ TOPSOIL, 100 mm
- ⑲ SODDING, SALT TOLERANT
- ⑳ SEEDING, CLASS 2A
- ㉑ EXISTING COMBINATION CURB & GUTTER REMOVAL
- ㉒ EXISTING HOT-MIX ASPHALT SURFACE REMOVAL, 85 mm
- ㉓ SUB-BASE GRANULAR MATERIAL, TYPE B 100 mm
- ㉔ PORTLAND CEMENT CONCRETE BASE COURSE WIDENING 225 mm
- ㉕ LEVELING BINDER (MACHINE METHOD), N50 (AS NEEDED)
- ㉖ HOT-MIX ASPHALT BINDER COURSE, IL-19.0, N50 (50 mm)
- ㉗ HOT-MIX ASPHALT SURFACE COURSE, MIX "C", N50 (38 mm)
- ㉘ DRILL AND GROUT #25 TIE BARS @ 600 mm CTS, 600 mm LONG

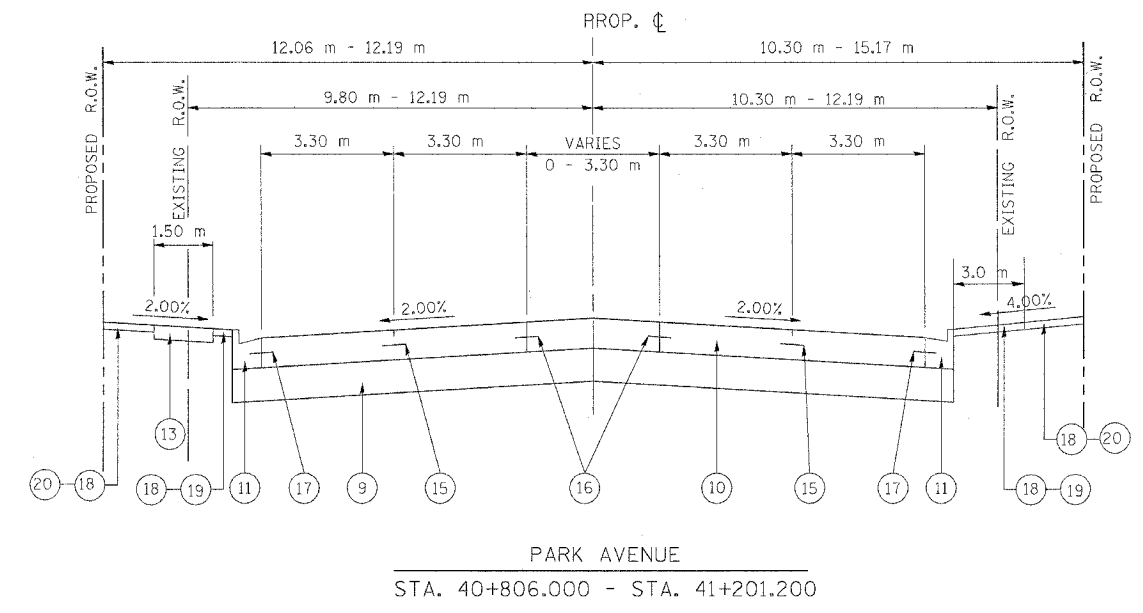

REVISIONS	
NAME	DATE

ILLINOIS DEPARTMENT OF TRANSPORTATION
US RTE 6 FROM LEXINGTON AVE TO FISK AVE

PROPOSED TYPICAL SECTIONS
PARK AVENUE AND
CENTER STREET

DRAWN BY VAP
CHECKED BY NAP

DATE 02/21/08