



F.A.P. RTE.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
351	2008-001VB	COOK	579	28
STA.	TO STA.			
FED. ROAD DIST. NO.	ILLINOIS	FED. AID PROJECT		

CONTRACT NO. 60E10

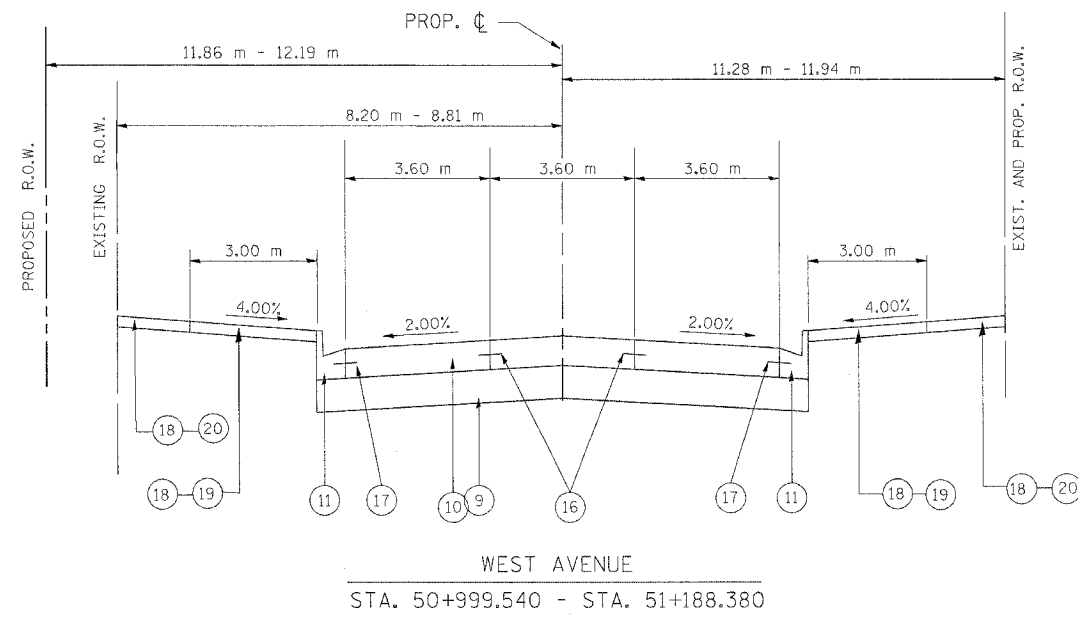

- LEGEND - PROPOSED**
- ① EXIST. P.C.C. BASE COURSE, 225-250 mm
 - ② EXIST. HOT-MIX ASPHALT SURFACE, 125 mm
 - ③ EXIST. CONCRETE CURB AND GUTTER
 - ⑨ AGGREGATE SUBGRADE, 300 mm
 - ⑩ PORTLAND CEMENT CEMENT PAVEMENT 260 mm (JOINTED)
 - ⑪ COMBINATION CONCRETE CURB AND GUTTER, TYPE B-15.60
 - ⑬ PORTLAND CEMENT CONCRETE SIDEWALK 125 mm
 - ⑮ SAWED LONGITUDINAL JOINT WITH 750 mm DEFORMED EPOXY-COATED No. 19 TIE BARS @ 750mm CTS.
 - ⑯ LONGITUDINAL CONSTRUCTION JOINT WITH 600 mm GROUTED IN PLACE DEFORMED EPOXY-COATED No. 19 TIE BARS @ 600 mm CTS.
 - ⑰ 600 mm DEFORMED EPOXY-COATED No. 19 TIE BARS @ 600 mm CTS.
 - ⑱ TOPSOIL, 100 mm
 - ⑲ SODDING, SALT TOLERANT
 - ⑳ SEEDING, CLASS 2A
 - ㉑ EXISTING COMBINATION CURB & GUTTER REMOVAL
 - ㉒ EXISTING HOT-MIX ASPHALT SURFACE REMOVAL, 85 mm
 - ㉓ SUB-BASE GRANULAR MATERIAL, TYPE B 100 mm
 - ㉔ PORTLAND CEMENT CONCRETE BASE COURSE WIDENING 225 mm
 - ㉕ LEVELING BINDER (MACHINE METHOD), N50 (AS NEEDED)
 - ㉖ HOT-MIX ASPHALT BINDER COURSE, IL-19.0, N50 (50 mm)
 - ㉗ HOT-MIX ASPHALT SURFACE COURSE, MIX "C", N50 (38 mm)
 - ㉘ DRILL AND GROUT #25 TIE BARS @ 600 mm CTS, 600 mm LONG

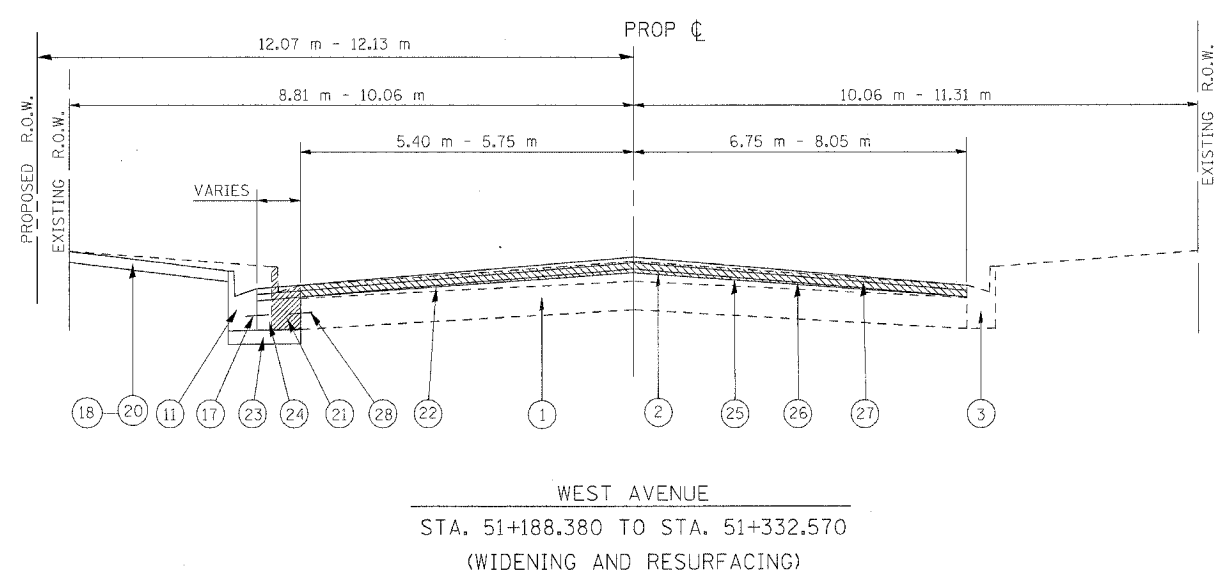

REVISIONS		ILLINOIS DEPARTMENT OF TRANSPORTATION US RTE 6 FROM LEXINGTON AVE TO FISK AVE PROPOSED TYPICAL SECTIONS WEST AVENUE
NAME	DATE	

DRAWN BY VAP
CHECKED BY NAP
DATE 02/21/08

URS 100 S. WACKER DR., SUITE 500
CHICAGO, ILLINOIS 60606
TEL. (312) 939-1000
FAX (312) 939-4198