


ELEVATION
(TYPICAL)

REMOVE AND REPLACE
EXISTING WATER SEAL
AND JOINT FILLER

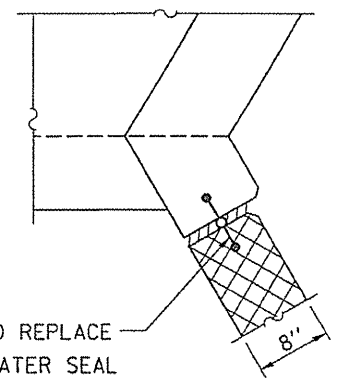

CORNER DETAIL
SEE DETAIL ON SHEET 9 OF 10

**BILL OF MATERIAL
NE WING**

CONCRETE REMOVAL	CU. YD.	1.7
STRUCTURE EXCAVATION	CU. YD.	50
EARTH EXCAVATION	CU. YD.	32
FURNISHED EXCAVATION	CU. YD.	82

**BILL OF MATERIAL
SW WING**

CONCRETE REMOVAL	CU. YD.	1.7
STRUCTURE EXCAVATION	CU. YD.	50
EARTH EXCAVATION	CU. YD.	32
FURNISHED EXCAVATION	CU. YD.	82

STA. 385+94
25° SKEW
8'-0" X 6'-0"
BOX CULVERT

FILE NAME =	USER NAME = woodshankr1	DESIGNED - R. WOODSHANK	REVISED -
PROJECT NAME =		DRAWN - R. WOODSHANK	REVISED -
PLOT SCALE = 1/8" = 1'-0"		CHECKED -	REVISED -
PLOT DATE = May 25, 2008 - 05:37:06 AM		DATE -	REVISED -

STATE OF ILLINOIS
DEPARTMENT OF TRANSPORTATION

CONCRETE REMOVAL DETAILS
SCALE: SHEET NO. 2 OF 4 SHEETS STA. TO STA.

F.A.S. RTE.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
296	(G.F.)	GRUNDY	11	8
FED. ROAD DIST. NO. - ILLINOIS			CONTRACT NO. 66742	