



F.A.I. RTE.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
80/94	2626.2-R-2	COOK/LAKE	1207	120
STA.	TO STA.			
FED. ROAD DIST. NO.	ILLINOIS	FED. AID PROJECT		
CONTRACT NO. 62114	INDOT DES. NO. 0100987			

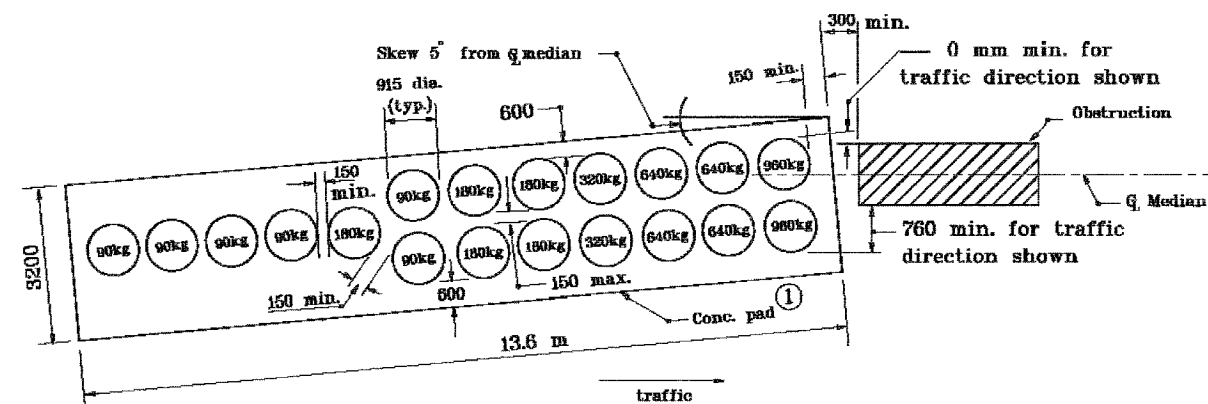

**CONCRETE PAD PLAN IMPACT ATTENUATOR TYPE ED
GRAVEL BARREL ARRAY FOR TEST LEVEL 3**

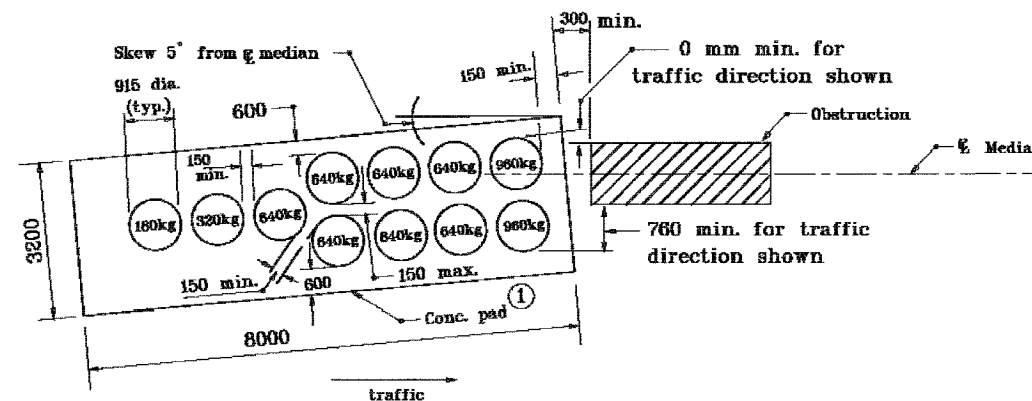

**CONCRETE PAD PLAN IMPACT ATTENUATOR TYPE ED
GRAVEL BARREL ARRAY FOR TEST LEVEL 2**

NOTES:

- ① Concrete pad shall be 150 mm thick with welded wire fabric 150 x 150, W3/W3 or equivalent. A clearance of 50 mm shall be provided between all sides and top of concrete pad and welded wire fabric.
2. Appropriate impact attenuator Test Level shall be used to determine the concrete pad size and gravel barrel layout.
3. See Standard Drawings 601-GAIA-01, 01A and 02 for grading details.
4. The details shown are for an impact attenuator type ED, gravel barrel array with a maximum obstruction width of 900.

All dimensions are in mm unless otherwise specified.

INDIANA DEPARTMENT OF TRANSPORTATION	
IMPACT ATTENUATOR ED LAYOUT MARCH 2002	
STANDARD DRAWING NO. 601-IAED-01	
	/s/ Richard L. VanCleave 3-01-02 DESIGN STANDARDS ENGINEER DATE
	/s/ Richard E. Sautner 3-01-02 CHIEF HIGHWAY ENGINEER DATE