


**OVERHEAD SIGN SERVICE DETAIL
(UNDERGROUND CONNECTIONS)**

GENERAL NOTES

1. Breaker panel wiring to be used with bridge bracket sign illumination, or when lighting overhead sign is not part of a roadway lighting system.
2. Oxidation inhibitor shall be liberally applied to all surfaces that mate with a dissimilar material.

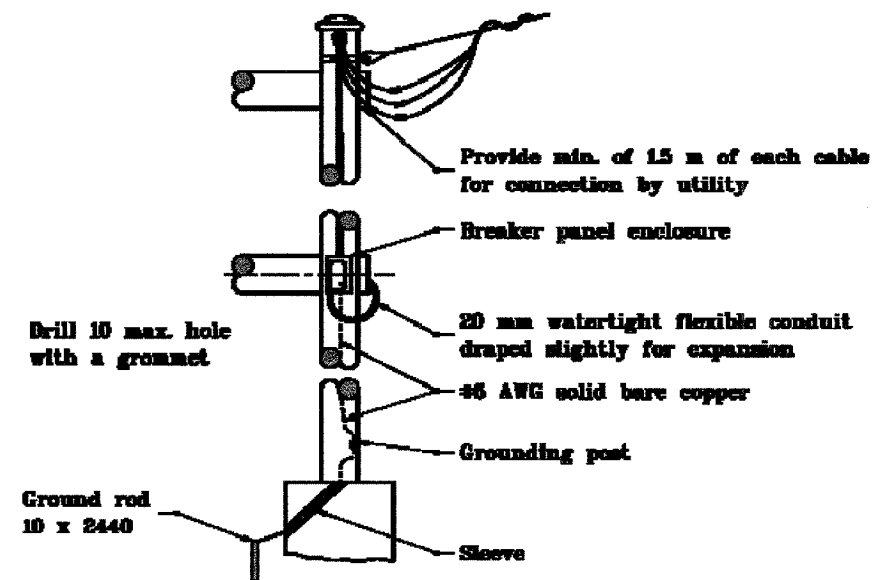

**OVERHEAD SIGN SERVICE DETAIL
(AERIAL CONNECTION)**

LEGEND

- Self insulated splicer (Insulating Link)
- Un-fused connector
- Fused connector
- Compression connector

All dimensions are in mm unless otherwise specified.

INDIANA DEPARTMENT OF TRANSPORTATION

SIGN WIRING DETAILS

SEPTEMBER 2001

STANDARD DRAWING NO. 502-SNWR-01

	<i>/s/ Anthony L. Brumback</i> 9-01-01 DESIGN ENGINEER
	<i>/s/ Russ Runk</i> 9-01-01 DESIGN ENGINEER