

STATE OF ILLINOIS
DEPARTMENT OF TRANSPORTATION

ROUTE NO.	SECTION	COUNTY	TOTAL SHEETS	SHEET	SHEET NO. 1
		COOK	14	7	4 SHEETS
FED. ROAD DIST. NO. 7	ILLINOIS	FED. AID PROJECT-			

Contract Number: 62912

GENERAL NOTES

Plan dimensions and details relative to existing structure have been taken from existing plans and are subject to nominal construction variations. It shall be the Contractor's responsibility to verify such dimensions and details in the field and make necessary approved adjustments prior to construction or ordering of materials. Such variations shall not be cause for additional compensation for a change in the scope of the work, however, the Contractor will be paid for the quantity actually furnished at the unit price bid for the work.

Any damage done to the bridge during beam removal shall be repaired by the Contractor. Cost to be included in the cost of "Removal of Existing P.P.C. Deck Beams".


Reinforcement bars shall conform to the requirements of AASHTO M 31 or M 322 Grade 60.

The top surface of the beams shall be finished in accordance with Article 504.06 of the Standard Specifications except that the surface shall not be roughened by brooming. The finished surface shall be free of depressions or high spots with sharp corners, and the top edge of keys shall be rounded or chamfered a minimum of 1/4".


Temporary concrete barrier shall only be anchored into the overlay and not the PPC Deck Beams.

Existing reinforcement extending into the removal area shall be cleaned, straightened and incorporated into the new construction.


Any reinforcement bars that are damaged during concrete removal shall be replaced with an approved bar splicer or anchorage system. Cost shall be included with Concrete Removal.

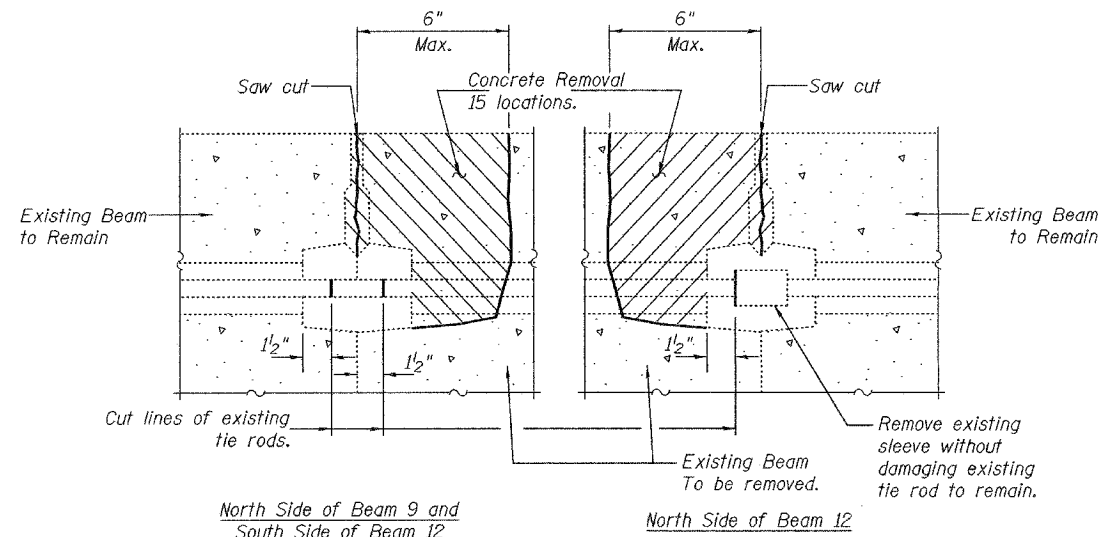


**BEAM REMOVAL DETAIL
AT TRANSVERSE TIES**

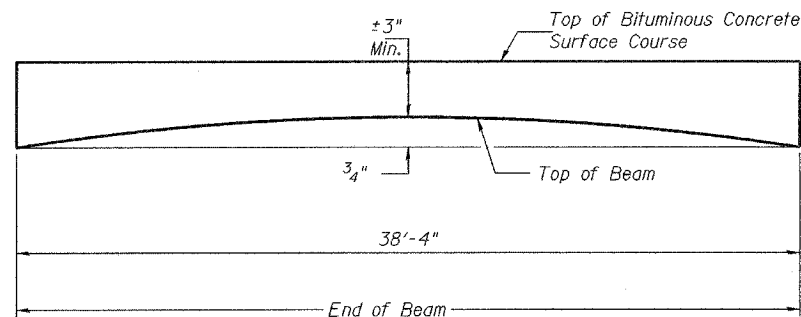


ANTICIPATED INITIAL CAMBER DIAGRAM

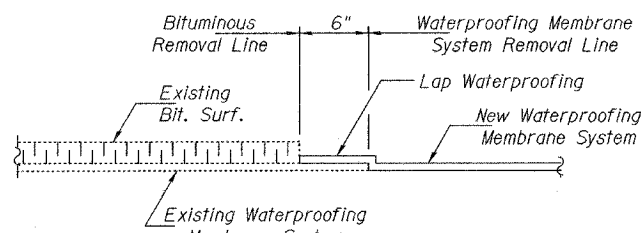

WATERPROOFING TREATMENT

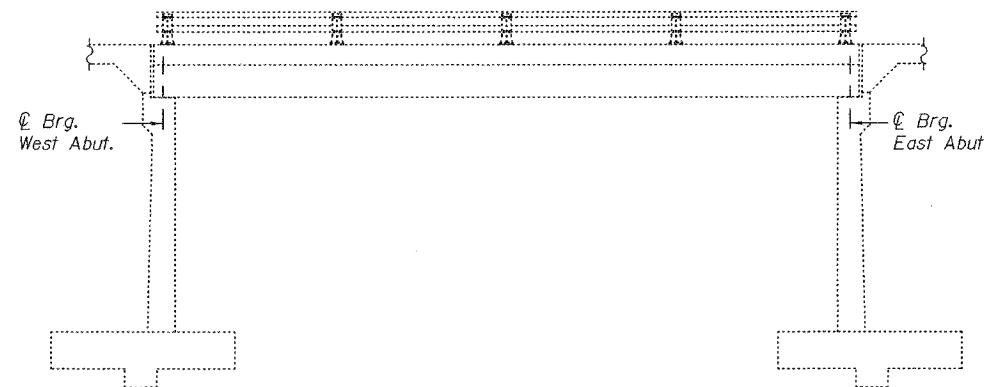

ELEVATION

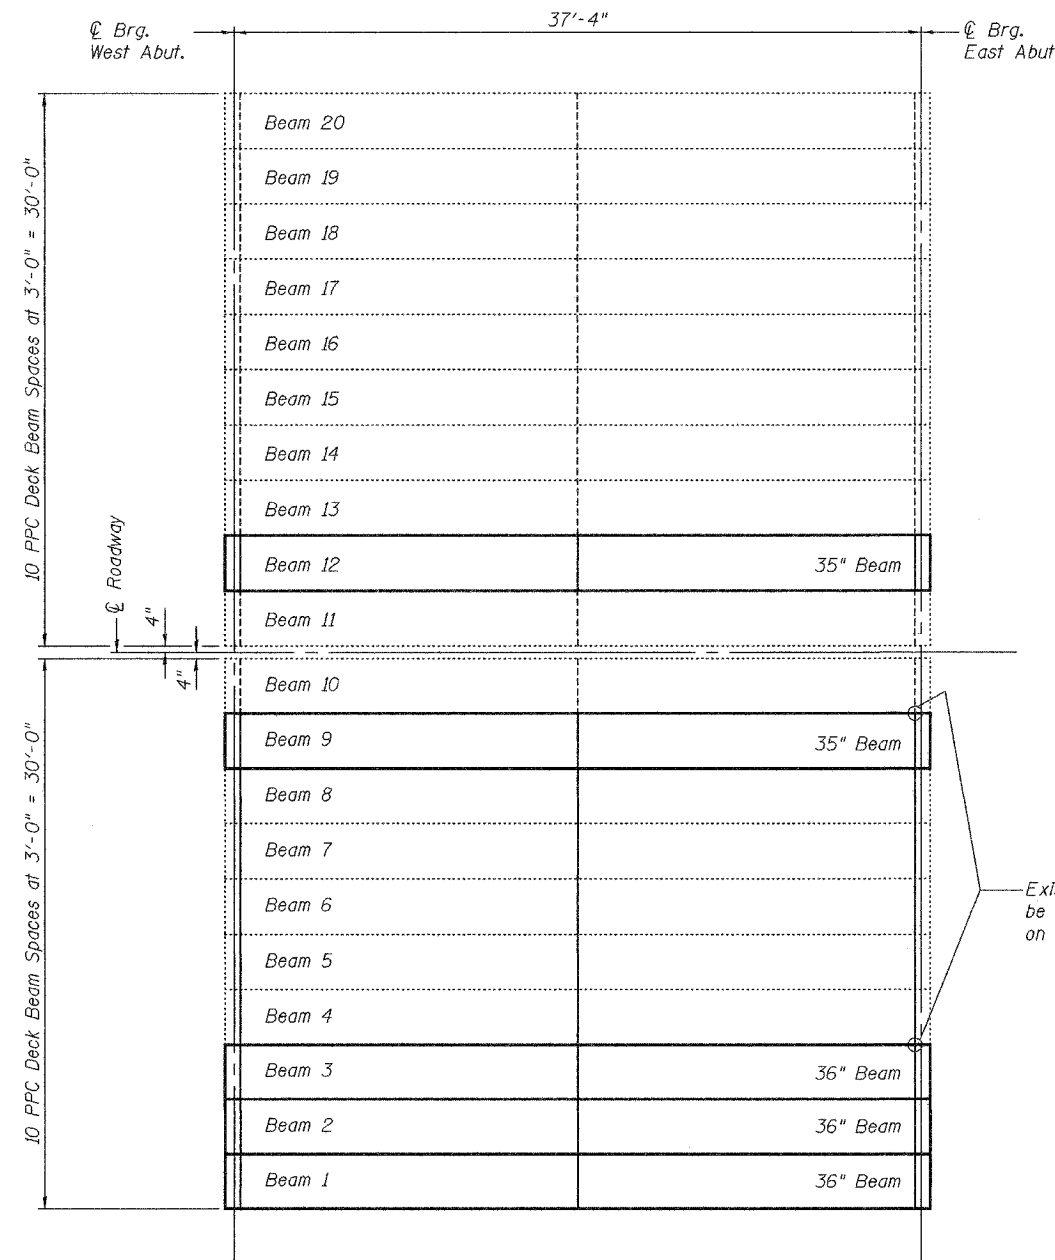

PLAN

TOTAL BILL OF MATERIAL

ITEM	UNIT	QUANTITY
Bituminous Concrete Surface Removal	Sq. Yd.	10.6
Waterproofing Membrane System	Sq. Yd.	51.8
Removal of Existing PPC Deck Beams	Sq. Ft.	575
Bituminous Concrete Surface Course, Superpave, Mix "D", N 50	Tons	7.5
PC Mortar Fairing Course	Foot	268
PPC Deck Beams (21" Depth)	Sq. Ft.	569
Concrete Superstructure	Cu. Yd.	13.5
Protective Coat	Sq. Yd.	44.7
Concrete Removal	Cu. Yd.	5.9
Reinforcement Bars, Epoxy Coated	Pound	1410
Asbestos Bearing Pad Removal	Each	2
Removing and Re-Erecting Existing Railing	Foot	78

Existing tie rods to be cut (Typ.) See detail on this sheet.

**DESIGN STRESSES
PRESTRESS UNITS**

$f'_c = 5000$ psi
 $f'_{ci} = 4000$ psi
 $f'_s = 270000$ psi ($1/2$ " low lax strands)
 $f'_{si} = 201960$ psi ($1/2$ " low lax strands)

**PLAN AND ELEVATION
F.A.P. RT. 343
COOK COUNTY
SN 016-0525**

DESIGNED	Victor H. Veliz
CHECKED	John A. Morris
DRAWN	VHV / S.J.B.
CHECKED	VHV / S.J.B.

EXAMINED	May 3, 2005
PASSED	John A. Morris
	Ralph E. Anderson



Expires: November 30, 2006

