




EXISTING TYPICAL SECTION
FROM STA 0+25 TO 5+62

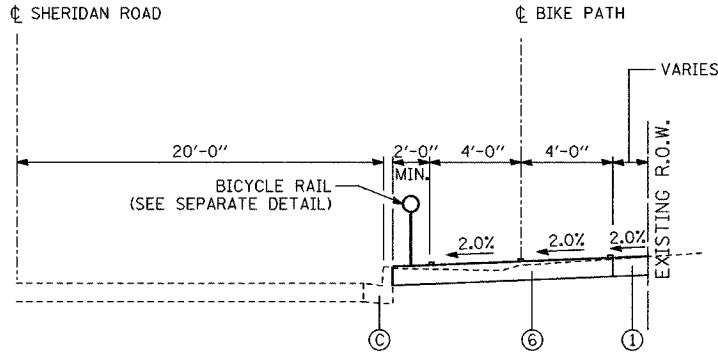


PROPOSED TYPICAL SECTION
FROM STA 3+52 TO 4+35

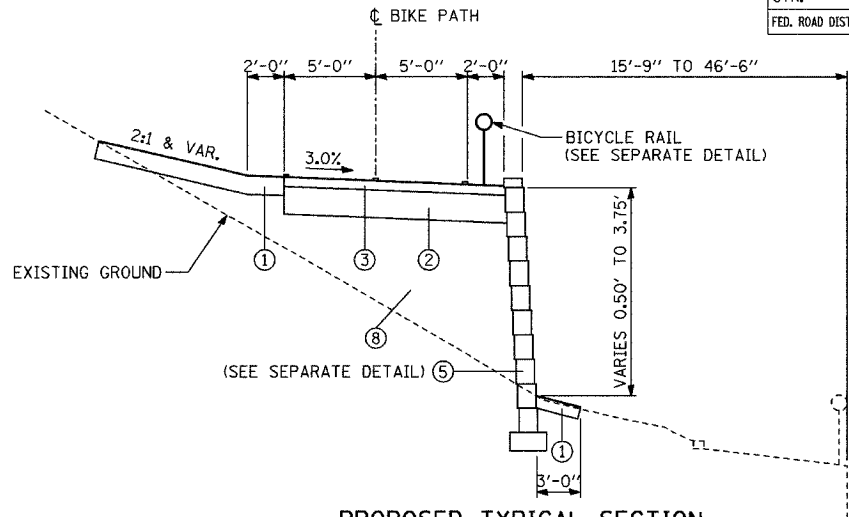


PROPOSED TYPICAL SECTION
FROM STA 10+70 TO 11+65

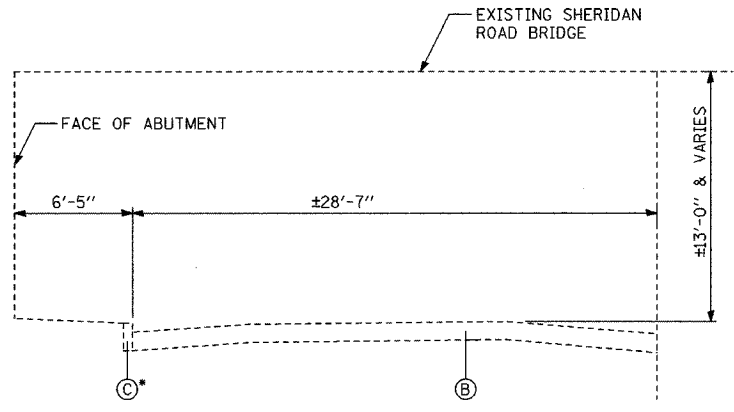


EXISTING TYPICAL SECTION
FROM STA 5+60 TO 10+60

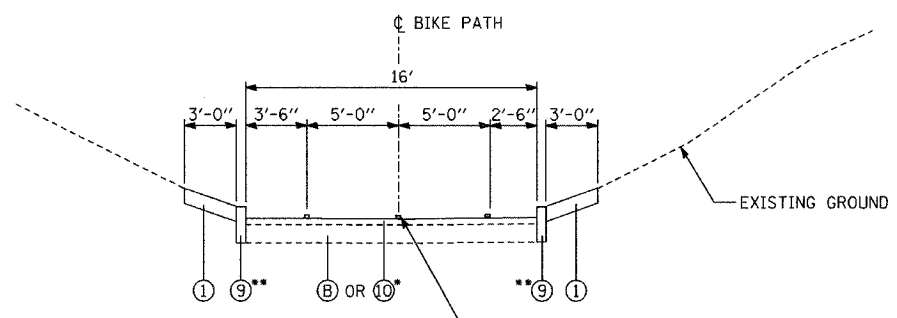


PROPOSED TYPICAL SECTION
FROM STA 5+62 TO 9+93

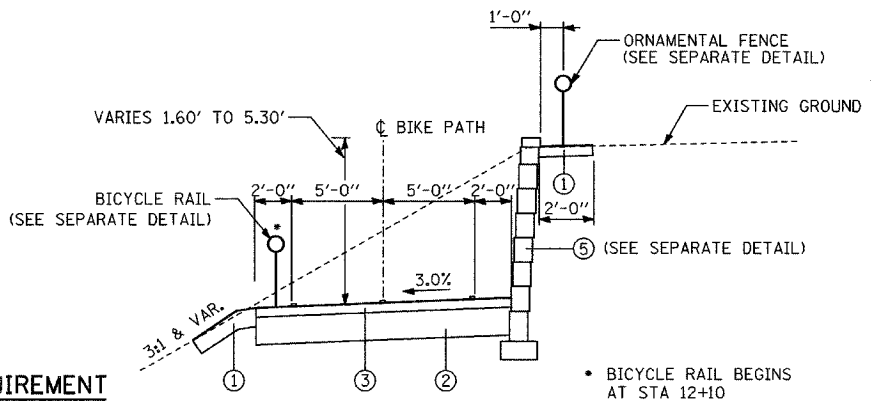

PROPOSED TYPICAL SECTION
FROM STA 11+65 TO 12+45

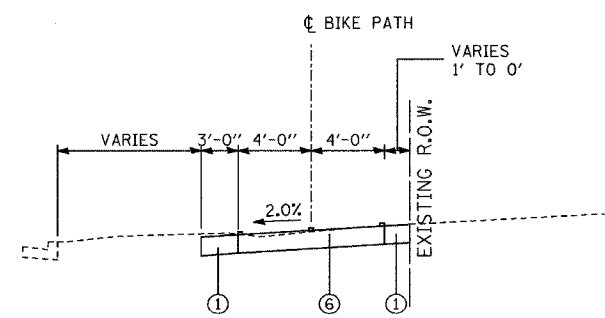

PROPOSED TYPICAL SECTION
FROM STA 0+00 TO 3+52
FROM STA 4+35 TO 5+62

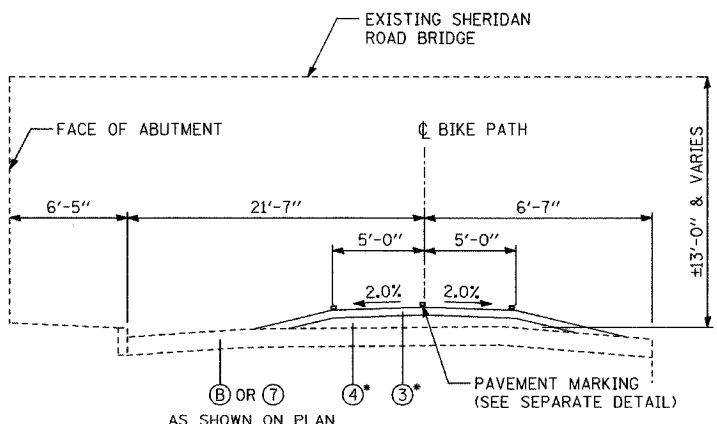


PROPOSED TYPICAL SECTION
FROM STA 9+93 TO 10+70

BITUMINOUS MIXTURE REQUIREMENT

ITEM	AC TYPE	VOIDS	RAP%
BITUMINOUS CONCRETE SURFACE COURSE, SUPERPAVE, MIXTURE C, N50	PG 64-22	4% ₀ 50GYR	15%
LEVELING BINDER (MACHINE METHOD) SUPERPAVE, N50	PG 64-22	4% ₀ 50GYR	15%

LEGEND:

- (A) EXISTING PCC SIDEWALK, 5"
- (B) EXISTING PCC DRIVEWAY, 8"± OR BIT. OVER PCC DRIVEWAY
- (C) EXISTING PCC CURB OR CURB & GUTTER
- (1) TOPSOIL, 4" AND SODDING
- (2) AGGREGATE BASE COURSE, TYPE B - 9"
- (3) BITUMINOUS CONCRETE SURFACE COURSE, SUPERPAVE, MIX C, N50, 3"
- (4) LEVELING BINDER (MACHINE METHOD), SUPERPAVE, N50
- (5) SEGMENTAL CONCRETE BLOCK WALL
- (6) PORTLAND CEMENT CONCRETE SIDEWALK, 5"
- (7) PORTLAND CEMENT CONCRETE DRIVEWAY, 6"
- (8) POROUS GRANULAR EMBANKMENT
- (9) CONCRETE CURB, TYPE B
- (10) BITUMINOUS CONCRETE SURFACE COURSE, SUPERPAVE, MIX C, N50, 2"

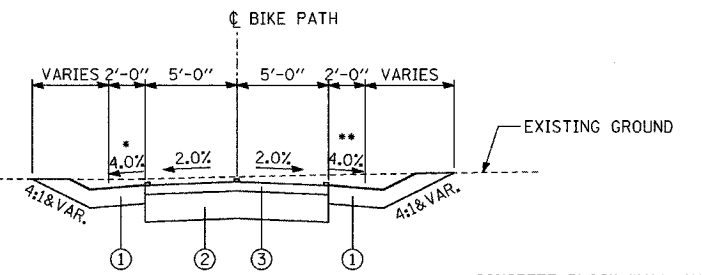

PROPOSED TYPICAL SECTION
FROM STA 12+45 TO 13+85.19

REVISIONS	
NAME	DATE

ILLINOIS DEPARTMENT OF TRANSPORTATION
SHERIDAN ROAD BIKE PATH
EXISTING AND PROPOSED
TYPICAL SECTIONS

SCALE: NONE
DATE: 11/05/2004
DRAWN BY: MB
CHECKED BY:

DATE: _____
BY: _____
REVISIONS:
1. _____
2. _____
3. _____
4. _____
5. _____
6. _____
7. _____
8. _____
9. _____
10. _____

DATE: _____
BY: _____
REVISIONS:
1. _____
2. _____
3. _____
4. _____
5. _____
6. _____
7. _____
8. _____
9. _____
10. _____