


## CONTRACTOR SHALL FURNISH AND COMMONWEALTH EDISON COMPANY SHALL INSTALL SERVICE POLE INSTALLATION


- E RGS CONDUIT STRAPS & LAG SCREWS.
- (F) COMED APPROVED SERVICE HEAD.
- (G) 3" DIA NON-METALLIC RIGID CONDUIT
- (H) SERVICE POLE INSTALLATION: TRANSFORMER, CUT-OUT SWITCH, LIGHTING ARRESTER, GROUNDING EQUIPMENT. INSULATORS, WIRES, POLE, MAST ARM, HARDWARE AND ANY OTHER EQUIPMENT AND LABOR DEEMED NECESSARY.
- (Î) METER ON CONTROL CABINET AS PART OF SERVICE INSTALLATION

ELECTRIC SERVICE INSTALLATION: "ELECTRIC SERVICE INSTALLATION" APPLIES TO THOSE FACILITIES REQUIRED IN ADDITION TO WHAT IS DETERMINED BY AGREEMENT WITH C.E. COMPANY TO BE A NORMAL INSTALLATION AND SUCH FACILITIES WILL BE PAID FOR AS "ELECTRICAL SERVICE INSTALLATION."


SERVICE SHALL BE INSTALLED OF APPROPRIATE SIZE SUCH THAT THE AVAILABLE SHORT CIRCUIT CURRENT TO ANY CONTROLLER WILL NOT EXCEED 10 KAIC.

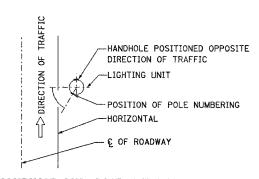


### HANDHOLE AND POLE NUMBERING



TRENCH CROSS SECTION



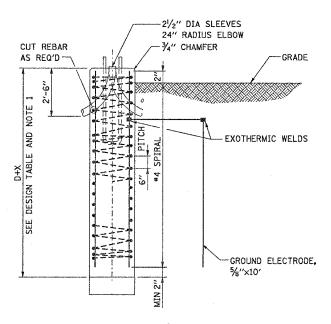


# | TOTAL SHEET NO. | COUNTY | TOTAL SHEET NO. | STA. 10+70.70 | TO STA. 66+16.00 | TED. ROAD DIST. NO. | ILLINOIS | FED. AID | PROJECT |

CONTRACT NO. 83781


#### **DESIGN TABLE**

TYPE OF SOIL	DESIGN DEPTH OF FOUNDATION	REINFORCEMENT IN FOUNDATION	
	SINGLE ARM D	SINGLE ARM	
		VERT BARS	SPIRAL
SOFT CLAY	17'-0"	8-#8x16'-0"	*4×157′
MEDIUM CLAY	12'-0"	8-*8×11′-0″	*4×110′
STIFF CLAY	8'-3"	8-#8x7'-6"	*4×78'
LOOSE SAND	10'-9"	8-#8x10'-0"	*4x102'
MEDIUM SAND	9'-3"	8-#8x8'-6"	*4×88'
DENSE SAND	8'-0"	8-#8x7'-6"	*4×78′
ROCK OR SOLID- IFIED SLAG	5′-0"	NONE	NONE

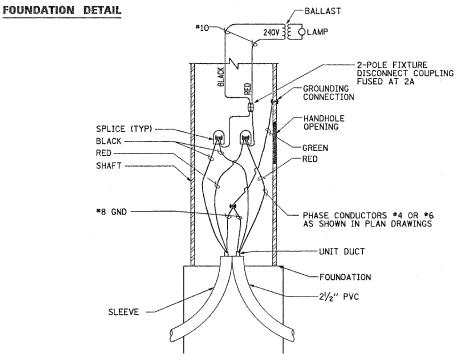

### POLE BASE WIRING DIAGRAM FOR TYPICAL LUMINAIRE

NOT TO SCALE

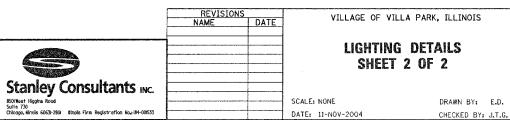



**ELECTRIC SERVICE INSTALLATION** 

**CONTRACTOR SHALL FURNISH** 

CONTROL CABINET - INCLUDING

DEVICES, WIRES AND FITTINGS.

RGS CONDUIT IN TRENCH - 3 " DIA

RGS CONDUIT PUSHED - 3 " DIA,

ELECTRICAL CABLE - CABLES FROM

ADAPTOR COUPLING AND ADDITIONAL 30' OF CABLE COILED FOR CONNECTION

INSIDE THE CABINET TO TOP OF

TO THE TRANSFORMER BY COMED.
SERVICE POLE INSTALLATION.

RGS CONDUIT - 3" DIA, ONE 10 FT

SECTION AND ONE 90° ELBOW.

GALVANIZED CONDUIT STRAPS

① 3" DIA METALLIC RIGID CONDUIT

OUTDOOR ADAPTER COUPLING FOR METALLIC TO NON-METALLIC

FOUNDATION AND METER CABINET WITH CONNECTION

AND INSTALL:

IF REQUIRED.

CONDUIT

& LAG SCREWS.

ELECTRIC FEEDER CABLES

TRIMMED CABLES -

HEAT-SHRINKABLE CAP

W/ FACTORY-APPLIED

WATERPROOF SEALANT

NUMBER OF CABLES)

ELECTRIC CABLE

TO LUMINAIRE.

(SIZED TO ACCOMODATE