

NOTES:
 The foundation dimensions shown are based on the presence of mostly cohesive soils with an average Unconfined Compressive Strength (Q_u) of at least 1.25 tsf, which must be determined by previous soil investigations at the jobsite. When other conditions are indicated, the boring data will be included in the plans and the foundation dimensions shown will be the result of site specific designs.
 If the conditions encountered are different than those indicated, the Contractor shall notify the Engineer to determine if the foundation dimensions need to be modified. If dimensions "B" or "F" are revised by more than 12" by the Contractor, "as-built" plans shall be prepared and submitted to the District Bureau of Operations for future reference.
 No sonotubes or decomposable forms shall be used below the lower conduit entrance. Permanent metal forms or other shielding may not be left in place below that elevation without the Engineer's written permission.
 Concrete shall be placed monolithically, without construction joints, unless otherwise noted. Backfill shall be placed per Article 502 of Standard Specification and prior to erection of support column.
 A normal surface finish followed by a Bridge Seat Sealer application will be required on concrete surfaces above the lowest elevation 6" below finished ground line. Cost included in Drilled Shaft Concrete Foundation.



BAR LIST - EACH FOUNDATION

Pipe Support Frames	cc	M	a	a/2
6"φ	7'-0"	9'-6"	0'-11"	5 1/2"
8"φ	7'-6"	10'-0"	1'-1 1/2"	6 3/4"
10"φ	8'-3"	11'-3"	1'-3"	7 1/2"
12"φ	9'-0"	12'-0"	1'-6"	9"


Bar	Number	Size	Length	Shape
h(E)	10	#5	M less 4"	—
s(E)	Varies	#5	Varies	□
v(E)	16	#9	F less 0'-5"	—
v(E)	24	#9	F less 0'-5"	—
#4(E) bar spiral - see Side Elevation				

SIDE ELEVATION
 Concrete Foundation poured monolithically with no construction joint.

All dimensions in parenthesis are for 42" high barrier.

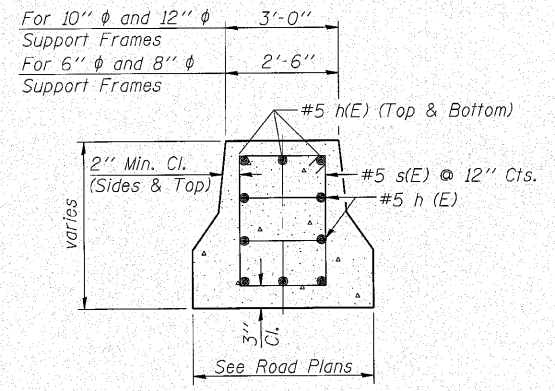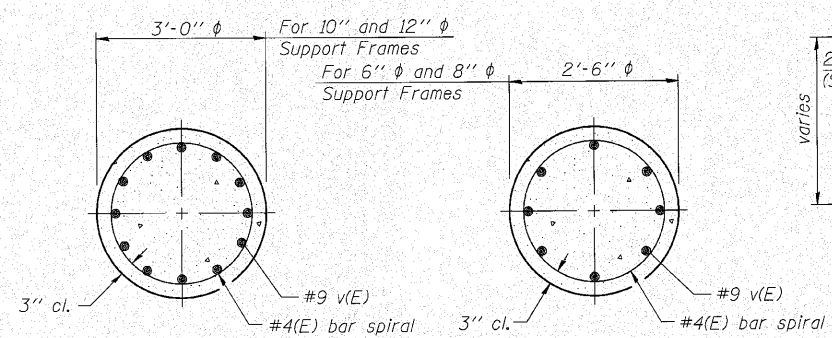

END VIEW

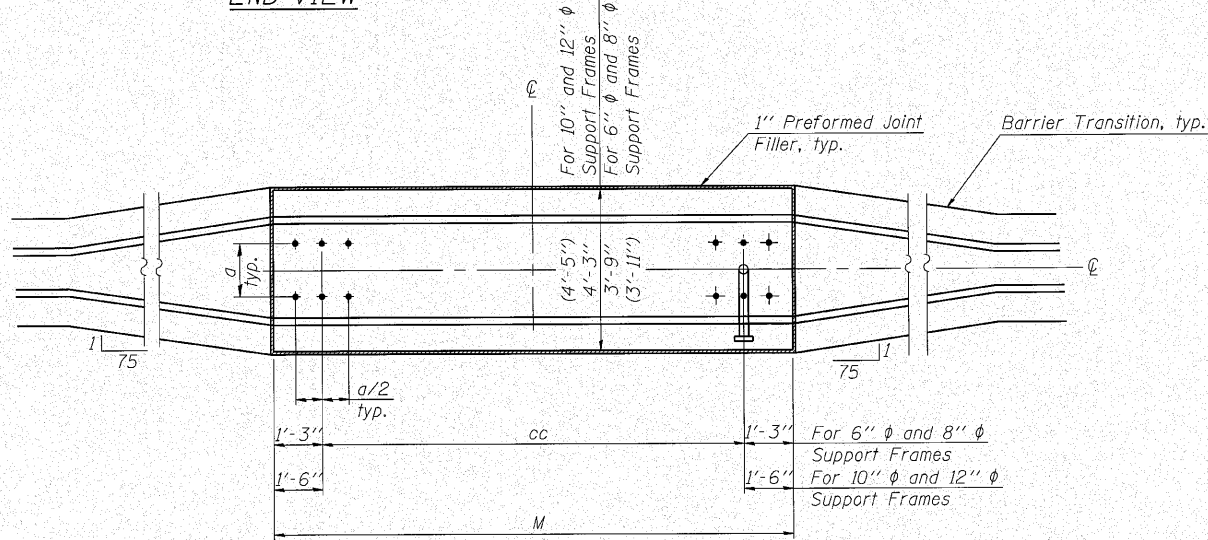

PLAN

Structure Number	Station	Left Foundation				Right Foundation				Class DS Concrete (Cu. Yds.)
		Elevation Top	Elevation Bottom	B	F	Elevation Top	Elevation Bottom	B	F	
ISO991080R139.5	795+35					683.47	657.84	20'-6"	25'-7 1/2"	18.8
ISO991080L140.3	839+88					713.23	686.24	22'-0"	27'-0"	19.7

OS4-MED

7-1-10

FILE NAME =	USER NAME = mthomas	DESIGNED - AMK	REVISED -
Clerba Group, Inc.	CHECKED - BWS	CHECKED - BWS	REVISED -
CONSULTING ENGINEERS	DRAWN - SAT	DRAWN - SAT	REVISED -
100 North Cumberland Avenue	CHECKED - BWS	CHECKED - BWS	REVISED -
Chicago, Illinois 60610			
TEL: 773.776.4000			
FAX: 773.776.4000			
WWW.CLERBAGROUP.COM			

STATE OF ILLINOIS
DEPARTMENT OF TRANSPORTATION

OVERHEAD SIGN STRUCTURES
MEDIAN SUPPORT FOUNDATION DETAILS

SHEET NO. 7 OF 9 SHEETS

F.A.I. RTE.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
80	99-5-Y	WILL	276	142
ILLINOIS FED. AID PROJECT			CONTRACT NO. 60147	