



STATE OF ILLINOIS
DEPARTMENT OF TRANSPORTATION




METAL SHELL PILE TABLE

Designation and outside diameter	Wall thickness t	Weight per foot (Lbs./ft.)	Inside volume (yd. ³ /ft.)
PP12	0.179"	22.60	0.0274
PP12	0.250"	31.37	0.0267
PP14	0.250"	36.71	0.0368
PP14	0.312"	45.61	0.0361

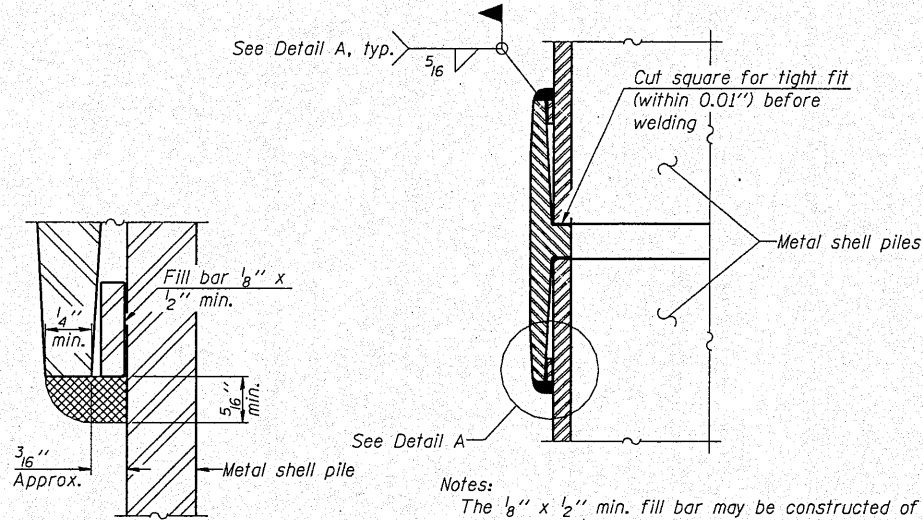


Notes:
The $\frac{1}{8}$ " x $\frac{1}{2}$ " min. fill bar may be constructed of 2 bars with a $\frac{1}{8}$ " max. gap between them.
Pile segments shall be driven to solid contact with splicer before welding.

WELDED COMMERCIAL SPLICE

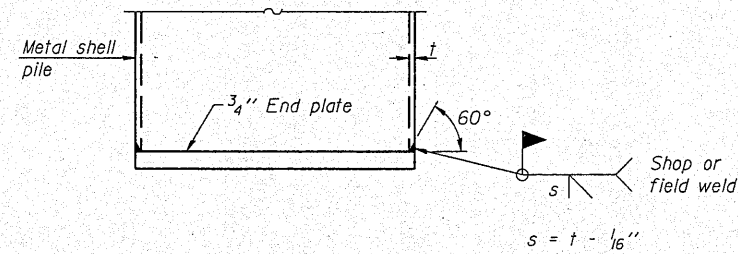

END PLATE ATTACHMENT

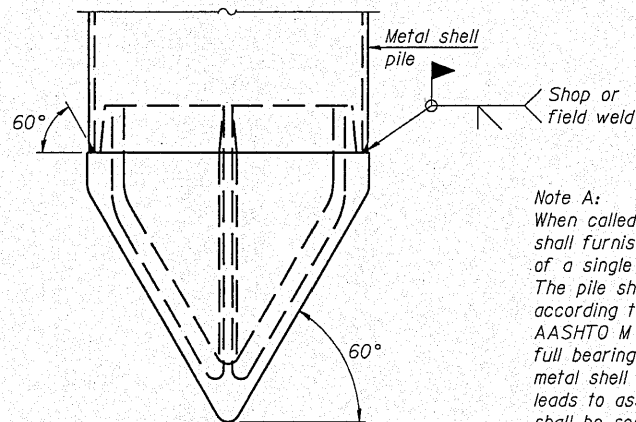

Note A:
When called for on the plans, the Contractor shall furnish metal shell pile shoes consisting of a single piece conical pile point as shown. The pile shoes shall be cast in one piece steel according to either ASTM A 148 Grade 90-60 or AASHTO M 103 Grade 65-35 and shall provide full bearing over the full circumference of the metal shell pile. The pile shoe shall have tapered leads to assure proper alignment and fitting and shall be secured to the pile with a circumferential weld.

METAL SHELL PILE SHOE ATTACHMENT


(See Note A)



DESIGNED - BAS
CHECKED - KEF
DRAWN - SGM
CHECKED - BAS

F-MS


11-1-09

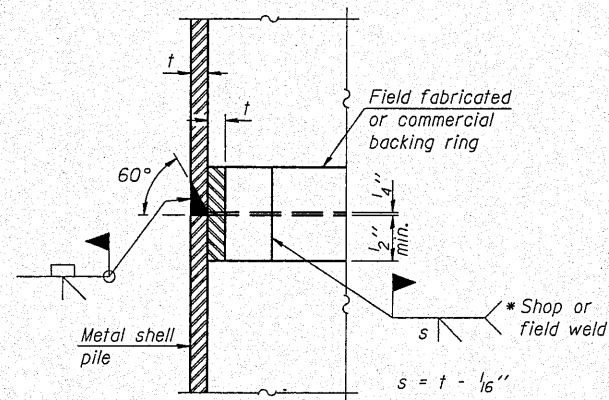

COMPLETE PENETRATION WELD SPLICE

* Field fabricated backing ring may be made from pile shell by removing segment to allow reducing circumference and vertically rejoin with partial joint penetration weld.


Note:
The metal shell piles shall be according to ASTM A 252 Grade 3.

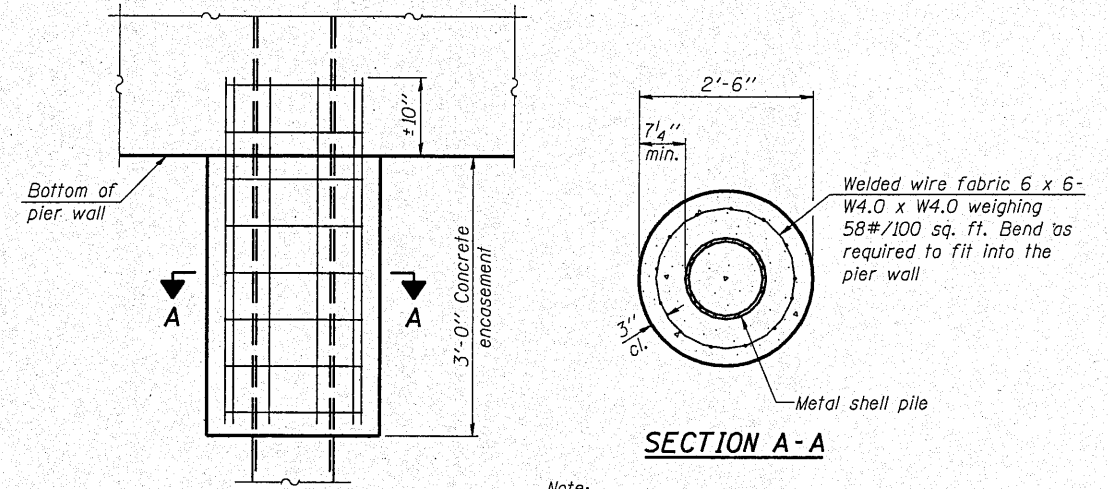

Note:
Forms for encasement may be omitted when soil conditions permit.

ELEVATION

CONCRETE ENCASEMENT AT PIERS

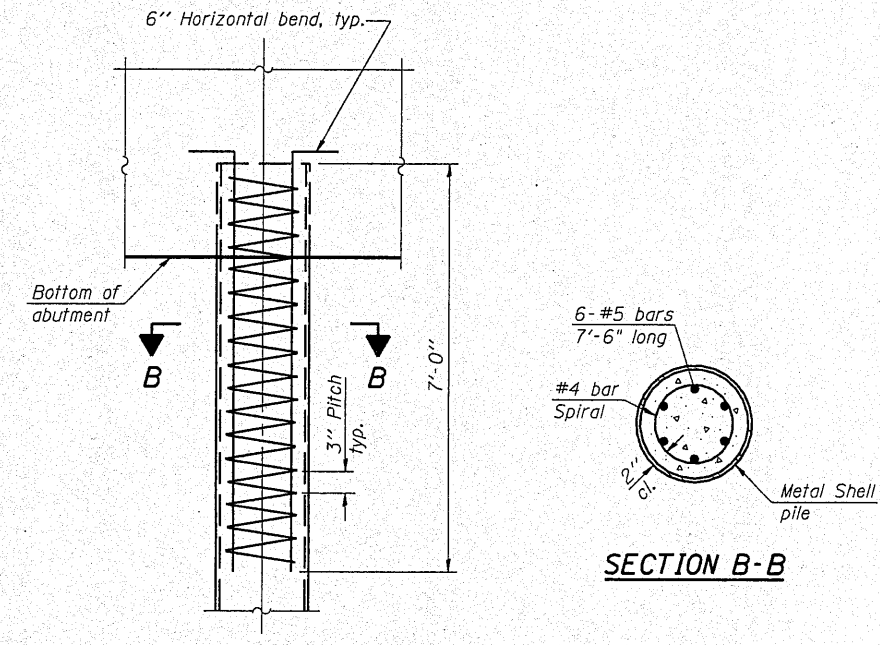

ELEVATION

METAL SHELL REINFORCEMENT AT ABUTMENTS

METAL SHELL PILE DETAILS
STRUCTURE NO. 036-0070

SHEET NO. 17	F.A.P. RTE.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
22 SHEETS	657	(116-C)BR-1	HENDERSON	56	34
			CONTRACT NO. 68761		
FED. ROAD DIST. NO. - ILLINOIS FED. AID PROJECT					