

STATE OF ILLINOIS  
DEPARTMENT OF TRANSPORTATION

ROUTE NO. F.A.S. 2826	SECTION (110B)-1	COUNTY JEFFERSON	TOTAL SHEETS 44	SHEET NO. 16	SHEET NO. 5 16 SHEETS
FED. ROAD DIST. NO. 7	ILLINOIS	FED. AID PROJECT-	Contract 82013		

EAST CURB LINE

Location	Station	Offset	Theoretical Grade Elevations
Back S. Abutment	837+26.38	-18.42	495.84
A	837+36.38	-18.42	495.70
B	837+46.38	-18.42	495.57
End S. Approach Pav't	837+56.38	-18.42	495.44

EAST EDGE OF PAVEMENT

Location	Station	Offset	Theoretical Grade Elevations
Back S. Abutment	837+22.68	-12.00	496.02
A	837+32.68	-12.00	495.88
B	837+42.68	-12.00	495.75
End S. Approach Pav't	837+52.68	-12.00	495.62

☉ ROADWAY & PROFILE GRADE


Location	Station	Offset	Theoretical Grade Elevations
Back S. Abutment	837+15.75	0.00	496.31
A	837+25.75	0.00	496.16
B	837+35.75	0.00	496.02
End S. Approach Pav't	837+45.75	0.00	495.89

WEST EDGE OF PAVEMENT

Location	Station	Offset	Theoretical Grade Elevations
Back S. Abutment	837+08.82	12.00	496.24
A	837+18.82	12.00	496.08
B	837+28.82	12.00	495.94
End S. Approach Pav't	837+38.82	12.00	495.80

WEST CURB LINE

Location	Station	Offset	Theoretical Grade Elevations
Back S. Abutment	837+05.12	18.42	496.16
A	837+15.12	18.42	496.00
B	837+25.12	18.42	495.86
End S. Approach Pav't	837+35.12	18.42	495.71

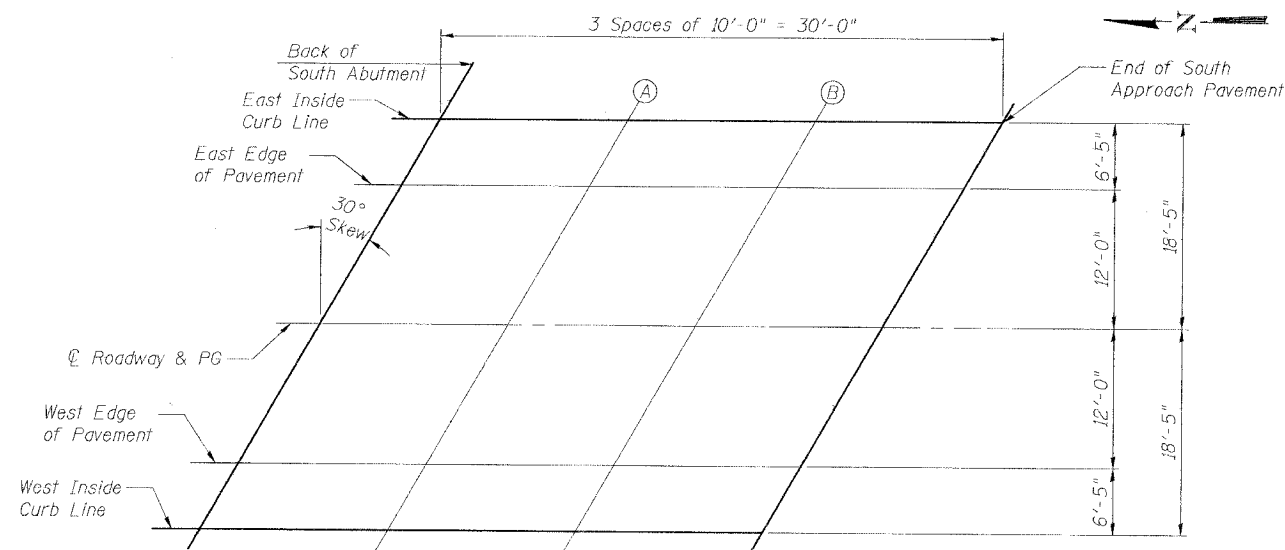

PLAN

TOP OF SOUTH APPROACH SLAB ELEVATIONS  
IL ROUTE 37 OVER LIMESTONE CREEK  
F.A.S. ROUTE 2826 SECTION 110B-1  
JEFFERSON COUNTY  
STA. 836+80  
S.N. 041-0107

DESIGNED	CMF
CHECKED	KCM
DRAWN	EJR
CHECKED	TMM

**McDonough-Whitlow, P.C.**  
Consulting Engineers & Land Surveyors  
138 East Wood Street  
Hillsboro, IL 62049  
Phone: 217.532.9233  
Fax: 217.532.6300  
PROFESSIONAL DESIGN NO. 184-002754