


LAYOUT NOTES

1. CONTRACTOR TO LAYOUT LOCATION OF PLANTERS AND IS TO BE REVIEWED AND APPROVED BY THE ENGINEER PRIOR TO ALL REMOVAL OPERATIONS.
2. MINIMALLY PROVIDE LOCATIONS OF THE PLANTER CURB CORNERS AND WALLS. GENERALLY PLANTERS ARE 1'-6" OFF THE BACK OF CURB EXCLUDING THE PLANTERS THAT ARE *. DUE TO THE CURVE OF THE CURB, THESE PLANTER MAY BE CLOSER A CERTAIN POINTS.
3. MAINTAIN AND REPLACE PLANTER LOCATIONS AS NECESSARY THROUGHOUT CONSTRUCTION OPERATIONS.
4. PLACE CONTROL AND EXPANSION JOINTS AS SHOWN ON PLANS AND DETAILS FOR ALL CURBS, WALKS, WALLS, STEPS, AND CONCRETE PAVING. WHERE JOINTS ARE NOT SHOWN, PLACE CONTROL JOINTS A MAXIMUM OF 10 FEET ON CENTER, EXPANSION JOINTS A MAXIMUM OF 30 FEET ON CENTER, AND BETWEEN ALL SEPARATE POURS.

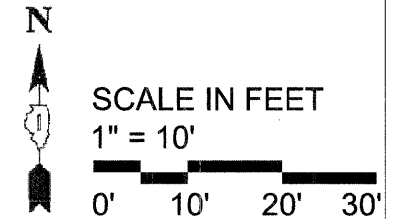

FILE NAME = SFLEL5	USER NAME = SJSERS	DESIGNED - TCK/MEU	REVISED - DECEMBER 1, 2009	STATE OF ILLINOIS DEPARTMENT OF TRANSPORTATION	LAYOUT PLAN WEST DUNDEE STREETScape PROJECT		F.A.P. RTE. 341	SECTION 09-00056-00-LS	COUNTY KANE	TOTAL SHEETS 20	SHEET NO. 11	
	PLOT SCALE = SCALES	CHECKED - TCK/TRR	REVISED -		SCALE: 1" = 20'	SHEET NO. 11 OF 20 SHEETS	STA. 325+50.00 TO STA. 327+90.80	C-91-188-10		CONTRACT NO. 63418		
	PLOT DATE = SDATES	DATE - OCTOBER 16, 2009	REVISED -				FED. ROAD DIST. NO. 1		ILLINOIS		FED. AID PROJECT ARA-9003(529)	