


Quantities, Legend & Typical Sections

PAY CODE	Description	Plan Quantity	Units	Construction Type Code
20200100	EARTH EXCAVATION	371	CU YD	J000
21001000	GEOTECHNICAL FABRIC FOR GROUND STABILIZATION	3017	SQ YD	J000
25200100	SODDING	158	SQ YD	J000
28000500	INLET AND PIPE PROTECTION	12	EACH	J000
35100100	AGGREGATE BASE COURSE, TYPE A	1073	TON	J000
55019500	STORM SEWERS, TYPE 1, REINFORCED CONCRETE CULVERT, STORM DRAIN, AND SEWER PIPE, CLASS IV 12"	5	FOOT	J000
40603310	HOT-MIX ASPHALT SURFACE COURSE, MIX "C", N50	0.62	TON	J000
40701861	HOT-MIX ASPHALT PAVEMENT (FULL-DEPTH), 9"	80	SQ YD	J000
44000100	PAVEMENT REMOVAL	2949	SQ YD	J000
60231700	MANHOLES, SPECIAL, 5'-DIAMETER, TYPE 1 FRAME, CLOSED LID	1	EACH	J000
60242400	INLETS, SPECIAL	1	EACH	J000
60250200	CATCH BASINS TO BE ADJUSTED	5	EACH	J000
60255800	MANHOLES TO BE ADJUSTED WITH NEW TYPE 1 FRAME, CLOSED LID	6	EACH	J000
60500070	REMOVING MANHOLES TO MAINTAIN FLOW	1	EACH	J000
60500080	REMOVING CATCH BASINS TO MAINTAIN FLOW	3	EACH	J000
60500090	REMOVING INLETS TO MAINTAIN FLOW	1	EACH	J000
67100100	MOBILIZATION	1	L SUM	J000
70101700	TRAFFIC CONTROL AND PROTECTION	1	L SUM	J000
* 78001100	PAINT PAVEMENT MARKING - LETTERS AND SYMBOLS	122	SQ FT	J000
* 78001110	PAINT PAVEMENT MARKING - LINE 4"	413	FOOT	J000
* 78001180	PAINT PAVEMENT MARKING - LINE 24"	60	FOOT	J000
LR420133	PORTLAND CEMENT CONCRETE PAVEMENT 9" (SPECIAL) WITH INTEGRAL CURB	2948	SQ YD	J000
* X0811100	RAILROAD CROSSING	1	L SUM	J000
XX005764	CATCH BASINS, SINGLE	3	EACH	J000
* Z0048400	RAILROAD CROSSING REMOVAL	1	EACH	J000
Z0048665	RAILROAD PROTECTIVE LIABILITY INSURANCE	1	L SUM	J000


* SPECIALTY ITEMS

BITUMINUS CHART	
Mixture Uses	Surface/Binder
PG:	PG 64-22
Design Air Voids	4.0 @ N50
Mixture Composition	
(Gradation Mixture)	IL 9.5
Friction Aggregate	C
20 Year Seal	0.8
Mix Unit Weight	112 lbs/sy/in

Proposed Hot-Mix Asphalt Surface Course See Plan & Profile For Locations

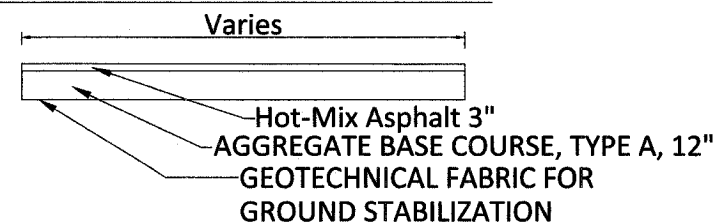


Existing Pavement Conditions

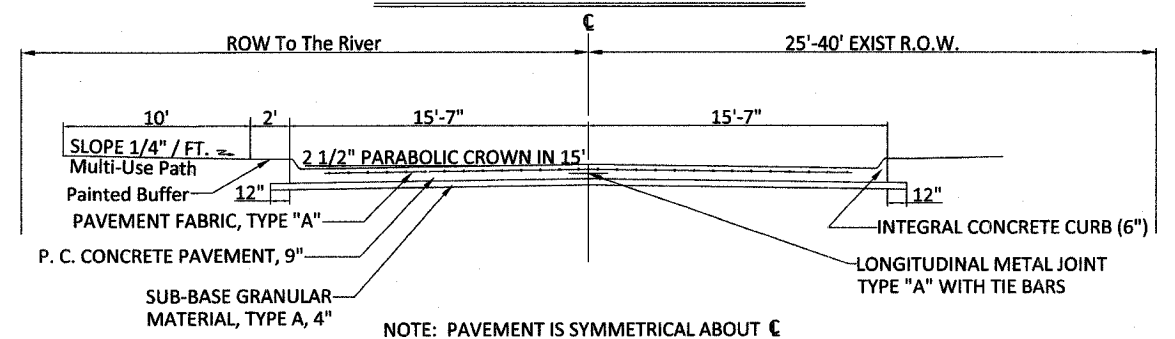


MILL STREET STA. 13+53 to 30+16.4

Proposed Pavement Replacement See Plan & Profile For Locations

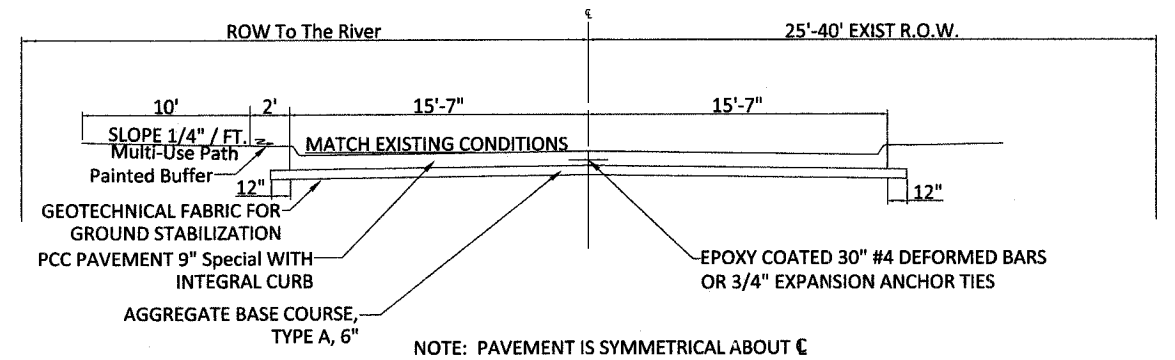

MILL STREET STA. 13+53 to 30+16.4

Proposed Hot-Mix Asphalt (Full Depth) 9" See Plan & Profile For Locations

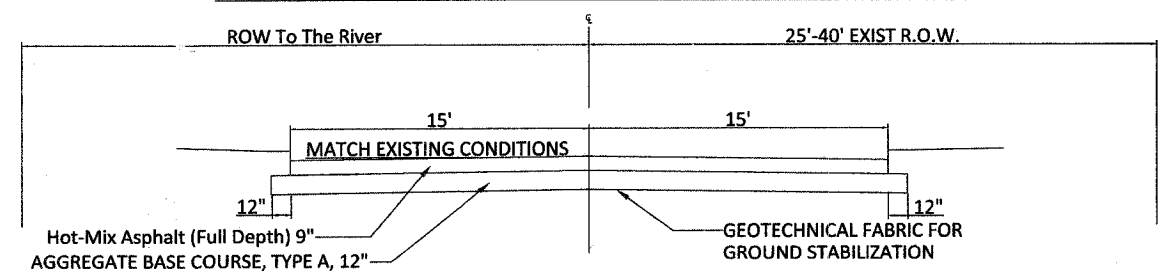

**CITY OF ROCK ISLAND
ENGINEERING DIVISION**

Mill Street Rehabilitation
3rd Avenue to 6th Avenue

Job Number	2550	Date	April 2, 2008
Computer Drawing Name	S:\PW\ENG\Quantities	By	WLC
		Sheet	2
		Of	None

