


**RAIL POST DETAILS**

In lieu of the cast-in-place anchor device shown, the Contractor has the option of drilling and epoxy grouting stainless steel anchor rods of the same diameter and grade as the specified cap screws. Embedment shall be according to the manufacturer's specifications.

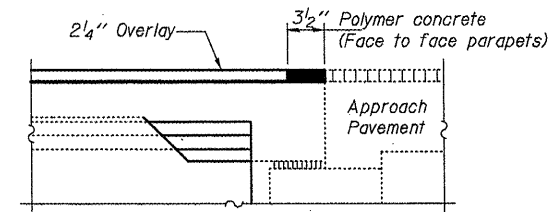

**SECTION AT SOUTH ABUTMENT**

S:\GEN\DRFT\STD8\PLNS\60A014\BRIDGE CONTRACTS\JOINTS\JOINTS.dwg 11/17/09\MLI\Chd.dgn

SN 102-0041 IL-117 ovr  
MILL CRK. S. OF US24

FILE NAME =	USER NAME = #USER#	DESIGNED - CEJ	REVISED -	<b>STATE OF ILLINOIS DEPARTMENT OF TRANSPORTATION</b>	<b>SOUTH ABUTMENT REPAIR DETAIL</b>				RTE.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
#FILE#		DRAWN - CEJ	REVISED -		702	(114BR-11)	WOODFORD	23	18				
PLOT SCALE = #SCALE#	CHECKED -	REVISED -			MISC. BRIDGE REPAIRS				CONTRACT NO. 68928				
PLOT DATE = #DATE#	DATE - 09/17/2009	REVISED -			SCALE:	SHEET NO. OF SHEETS	STA.	TO STA.	FED. ROAD DIST. NO. 4 ILLINOIS FED. AID PROJECT				