


(FOR BUTT JOINT AND HMA TAPER SEE DETAIL BELOW)


### OPTION 1

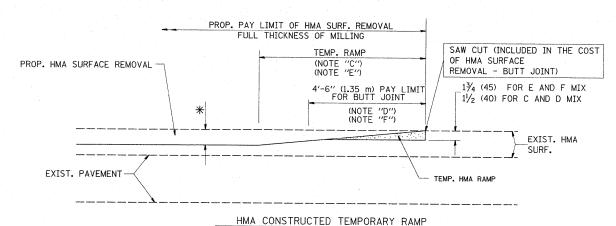

(FOR BUTT JOINT AND HMA TAPER SEE DETAIL BELOW)

### OPTION 2

### TYPICAL TEMPORARY RAMP

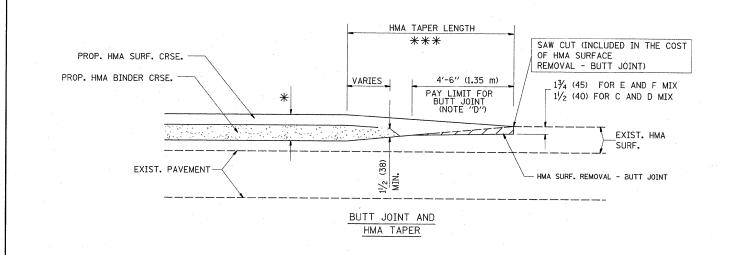

## TYPICAL BUTT JOINT AND HMA TAPER FOR MILLING AND RESURFACING

FILE NAME = USER NAME = ulrichkd DESIGNED - M. DE YONG REVISED - R. SHAH 10-25-94

ci\pw\_work\PWIDOT\ULRICHKD\dms90448\DissStd.dgn DRAWN - REVISED - A. ABBAS 03-21-97

PLOT SCALE = 50.8000 '/ IN. CHECKED - REVISED - M. GOMEZ 04-06-01

PLOT DATE = 12/22/2008 DATE - 06-13-90 REVISED - R. BORO 01-01-07

# FOR "PORTLAND CEMENT CONCRETE SURFACE REMOVAL- BUTT


PROP. HMA OR PCC

SURFACE REMOVAL - BUTT JOINT
30'-0" (9.0 m) (NOTE "A")
15'-0" (4.5 m) (NOTE "B")

(NOTE "D")

\*\* \* EXIST. PAVEMENT

BUTT JOINT DETAIL

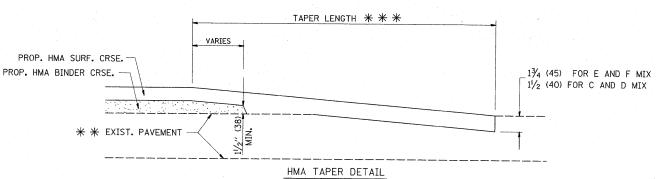

# TYPICAL BUTT JOINT AND HMA TAPER FOR RESURFACING ONLY

\* \* PC CONCRETE, HMA OR HMA RESURFACED PAVEMENT.

#### NOTES

- A: MAINLINE ROADWAYS AND MAJOR SIDE ROADS.
- B: MINOR SIDE ROADS.
- C: THE TEMP. RAMP SHALL BE CONSTRUCTED IMMEDIATELY UPON REMOVAL OF THE EXISTING HMA SURFACE.
- D: THE BUTT JOINT SHALL BE CONSTRUCTED IMMEDIATELY PRIOR TO PLACING THE PROPOSED HMA COURSES.
- E: TAPER THE TEMP. RAMP AT A RATE OF 3'-0" (900 mm) PER 1 INCH (25 mm) OF MILLING THICKNESS.
- F: INSTALLATION AND REMOVAL OF THE 4'-6" (1.35 m) TEMP. RAMP IS INCLUDED IN COST OF HMA SURFACE REMOVAL BUTT JOINT
- G: SEE ARTICLE 406.08 AND 406.14 OF THE STANDARD SPECIFICATIONS FOR "HMA AND/OR PCC SURFACE REMOVAL, BUTT JOINT".
- \* SEE TYPICAL SECTIONS FOR MILLING THICKNESS.
- \*\* \* 20'-0" (6.1 m) PER 1 (25) RESURFACING (NOTE "A") 10'-0" (3.0 m) PER 1 (25) RESURFACING (NOTE "B")

### BASIS OF PAYMENT:

STATE OF ILLINOIS

**DEPARTMENT OF TRANSPORTATION** 

THE BUTT JOINT WILL BE PAID FOR AT THE CONTRACT UNIT PRICE PER SCUARE YARD (SQUARE METER)
FOR "HOT-MIX ASPHALT SURFACE REMOVAL - BUTT JOINT" OR FOR "PORTLAND CEMENT CONCRETE SURFACE REMOVAL- BUTT JOINT".

ALL DIMENSIONS ARE IN INCHES (MILLIMETERS) UNLESS OTHERWISE SHOWN.