


F.A.U.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
7998	97-00030-06-WR	SANGAMON	117	1
FED. ROAD DIST. NO.		ILLINOIS	FED. AID PROJECT	

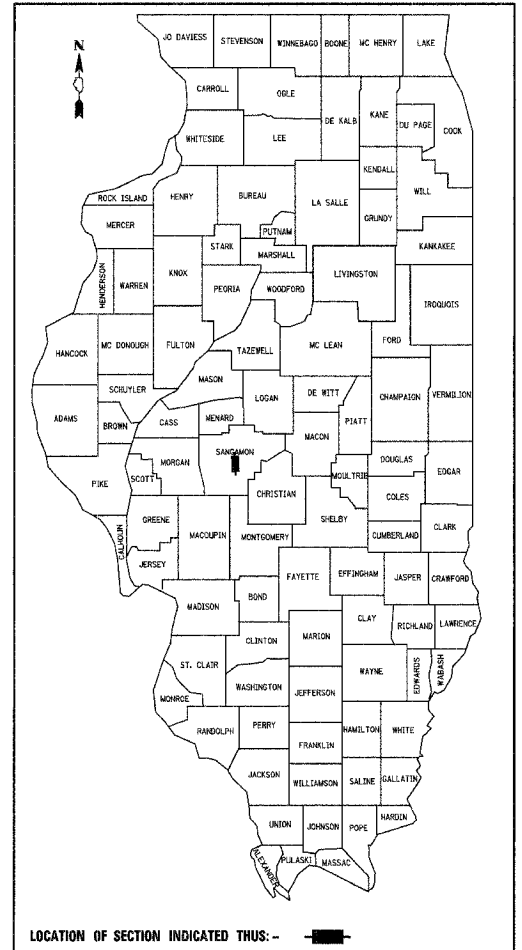

LOCATION OF SECTION INDICATED THUS: - [Symbol] -

**STATE OF ILLINOIS**  
**DEPARTMENT OF TRANSPORTATION**  
**DIVISION OF HIGHWAYS**  
**PLANS FOR PROPOSED ROADWAY**  
**RECONSTRUCTION AND RESURFACING**  
**SURFACE TRANSPORTATION / URBAN PROGRAM**  
**F.A.U. ROUTE 7998 (C.H. 43 / EAST LAKE SHORE DRIVE)**  
**SECTION: 97-00030-06-WR**  
**PROJECT No. <sup>BS</sup>M-5146(073)**  
**SANGAMON COUNTY**  
**JOB No. C-96-239-08**


1	COVER SHEET
2	GENERAL NOTES
3 - 6	SUMMARY OF QUANTITIES
7 - 15	SCHEDULE OF QUANTITIES
16 - 20	TYPICAL SECTIONS
21	ALIGNMENT & TIES
22 - 48	PLAN & PROFILES
49 - 55	MAINTENANCE OF TRAFFIC
56 - 59	EROSION & SEDIMENT CONTROL DETAILS
60 - 72	DRAINAGE PLANS
73 - 75	PAVEMENT MARKING DETAILS
76 - 80	TRAFFIC SIGNAL DETAILS
81 - 84	INTERSECTION DETAILS
85 - 86	SPECIAL DETAILS
87 - 109	CROSS SECTIONS - EAST LAKE SHORE DRIVE
110	CROSS SECTIONS - SERVICE DRIVE
111	CROSS SECTIONS - LACONWOOD DRIVE
112 - 117	CROSS SECTIONS - ROCHESTER ROAD

000001-05	602601-01	701306-01	805001
280001-04	602701-01	701311-02	814001-01
406201-01	604011-03	701326-02	814006-01
482001-02	606001-03	701501-04	857001
542301-01	606201-01	701502-02	873001-01
542306-01	630001-07	701801-03	876001
602011	642001	701901	877011-03
602016	701011-01	720016-01	878001-06
602301-01	701201-02	780001-01	880006
602401-01	701301-02	781001-02	

**SCALES**

FULL SIZE PLANS HAVE BEEN PREPARED USING STANDARD ENGINEERING SCALES. REDUCED SIZED PLANS WILL NOT CONFORM TO STANDARD SCALES. IN MAKING MEASUREMENTS ON REDUCED PLANS, THE ABOVE SCALES MAY BE USED.

**PROJECT BEGINS**  
STA. 9 + 00.00

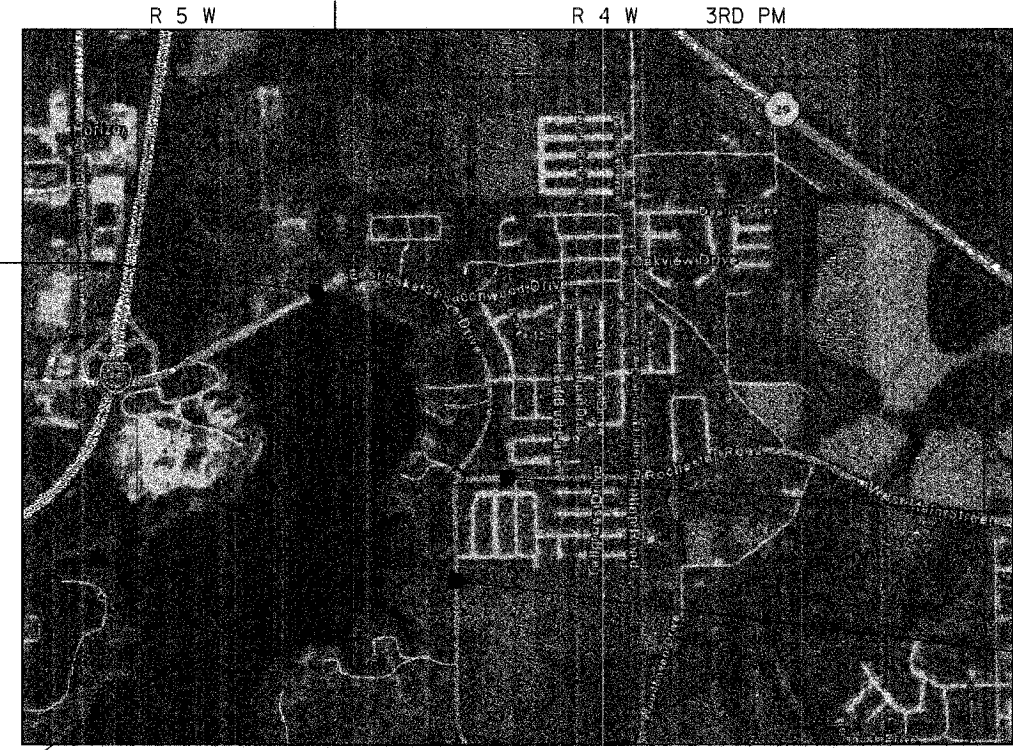

**IMPROVEMENT ENDS**  
STA. 109 + 95.00

**PROJECT ENDS**  
STA. 67 + 50.00

☩ STA. 56+50.00 PROP. EAST LAKE SHORE DRIVE =  
 ☩ STA. 100+00.00 PROP. ROCHESTER ROAD (FAU 8000/CH 56)

**LOCATION MAP**

APPROXIMATE SCALE: 0 1/2 MILE 1 MILE  
 EAST LAKE SHORE DRIVE = 5,850.00 FEET = 1.108 MILES  
 ROCHESTER ROAD = 995.00 FEET = 0.188 MILES  
 NET LENGTH OF SECTION = 6,845.00 FEET = 1.296 MILES

**DESIGN CLASSIFICATION**

EAST LAKE SHORE DRIVE (DESIGN SPEED = 45 MPH) -  
 URBAN MINOR ARTERIAL ADT = 16,715 (2028)  
 ROCHESTER ROAD (DESIGN SPEED = 45 MPH) -  
 URBAN MINOR ARTERIAL ADT = 12,460 (2028)

CLAYTON M. SHIPLEY  
 ILLINOIS P.E. 062.051269  
 EXPIRES 11/30/2009

4/10/08  
DATE

**STATE OF ILLINOIS**  
**DEPARTMENT OF TRANSPORTATION**  
**DIVISION OF HIGHWAYS**

APPROVED April 14 20 08  
 COUNTY ENGINEER  
 PASSED April 17 20 08  
 W.R. Frey  
 DISTRICT 6 CONSTRUCTION ENGINEER

PASSED APRIL 17 20 08  
 District Six Engineer of  
 LOCAL ROADS & STREETS  
 Releasing For  
 Bid Based on  
 Limited Review  
Christie M. Reed  
 DEPUTY DIRECTOR OF HIGHWAYS,  
 REGION FOUR ENGINEER

**PRINTED BY THE AUTHORITY OF THE STATE OF ILLINOIS**

**CONTRACT No. 93467**

**CALL J.U.L.I.E.** (JOINT UTILITY LOCATING INFORMATION FOR EXCAVATORS)  
 48 Hours (2 working days) Before You Dig.  
 TOLL FREE: 1 (800) 892-0123