


TYPICAL PLACEMENT OF PRISMATIC REFLECTORS ON CURBS

(NO SCALE)




NOTE: CURB AND MEDIAN PAINTING WILL INCLUDE THE ENTIRE LENGTH OF THE CURB, AND THE ENTIRE AREA OF THE MEDIAN, FOR ALL RAISED MEDIANS.


RAISED MEDIAN AND CURB PAINTING

(NO SCALE)

_TIE BARS

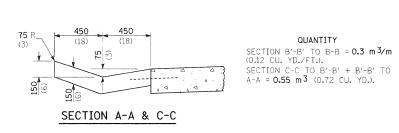

∽FLOW LINE¬

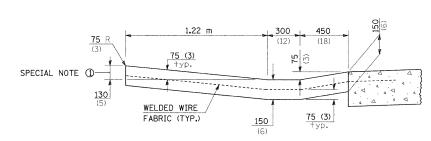

SECTION B-B & B'-B'

SPECIAL NOIES:

①SECTION B-B & B'-B'

125 (5) IS THE NORMAL DIMENSION. IF SPECIFIED
IN THE PLANS, THE FOLLOWING SHALL BE USED FOR
IMPROVED ENTRANCE MATCH-UP: MINIMUM - 75 (3)

MAXIMUM - 225 (9) SPECIAL NOTES:

LIMITS OF CLASS SI CONCRETE (OUTLET)

<u>PLAN</u>

EDGE OF PAVEMENT

QUANTITY

SEE STANDARD 606101 AND SECTION 606 OF THE STANDARD SPECIFICATIONS FOR ADDITIONAL INFORMATION

REVISIONS DAT	ILLINOIS DEPARTMENT OF TRANSPORTATION MISC. DETAILS FAP ROUTE 809 (IL RTE. 158) SECTION (133, 134)RS-4, 135RS-5 ST. CLAIR AND MONROE COUNTY		
	VERT.		
	HORIZ.	RAWN BY HECKED BY	

PLOT FILE 1 PLOT REFER