

ROUTE	SECTION	COUNTY	TOTAL SHEETS	SHEET NUMBER
VARIOUS	2007-041 BP	VARIOUS	25	3

Contract 60D31

GENERAL NOTES FOR PAINT

CLEANING AND PAINTING OF THE EXISTING STRUCTURAL STEEL SHALL BE AS SPECIFIED IN THE SPECIAL PROVISION FOR "CLEANING AND PAINTING EXISTING STEEL STRUCTURES".

A MINIMUM OF FOUR (4) AIR MONITORS WILL BE REQUIRED TO MONITOR ABRASIVE BLASTING OPERATIONS PER LOCATION. FOR LOCATIONS 1 (SN'S 099-0016,-0017), 2 (SN'S 099-0018,-0019), 3 (SN'S 099-0022,-0023) AND 4 (SN 045-0004) SEE SPECIAL PROVISION FOR CONTAINMENT AND DISPOSAL OF LEAD PAINT CLEANING RESIDUE. LOCATIONS 5 (SN 056-0037) AND 6 (SN 056-0057) DO NOT CONTAIN LEAD. FOR LOCATIONS 5 & 6 SEE SPECIAL PROVISION FOR CONTAINMENT AND DISPOSAL OF NON-LEAD PAINT CLEANING RESIDUE.

THE SSPC-QP1 AND SSPC-QP2 PAINTING CONTRACTOR CERTIFICATIONS WILL BE REQUIRED FOR THESE BRIDGES.

THE AREAS DESIGNATED TO BE CLEANED PER NEAR WHITE BLAST CLEANING SSPC-SP10 SHALL BE PAINTED ACCORDING TO THE REQUIREMENTS OF PAINT SYSTEM 1 - OZ/E/U. THE COLOR OF THE FINAL FINISH COAT FOR ALL INTERIOR STEEL SURFACES SHALL BE GRAY, MUNSELL NO 5B 7/1. THE COLOR OF THE FINAL FINISH COAT FOR THE EXTERIOR AND BOTTOM FLANGE OF THE FASCIA BEAMS SHALL BE REDDISH BROWN, MUNSELL NO 2.5YR 3/4.

ALL ITEMS (SUCH AS, BUT NOT LIMITED TO; CONDUITS, BRACKETS AND DECK DRAINS) ATTACHED TO THE OUTSIDE OF THE FASCIA BEAMS SHOULD BE CLEANED AND PAINTED.

LOCATIONS 1(SN'S 099-0016,-0017), 2(SN'S 099-0018, -0019) AND 3(SN'S 099-0022, -0023)


ALL ORIGINAL BEAMS, BEARINGS AND OTHER STRUCTURAL STEEL WITHIN FIVE (5) FT., (MEASURED ALONG THE BEAM) OF EITHER SIDE OF THE DECK JOINTS, SHALL BE CLEANED PER NEAR WHITE BLAST CLEANING SSPC-SP10. THE EXTERIOR SURFACES AND TOP AND BOTTOM OF THE BOTTOM FLANGE OF THE ORIGINAL FASCIA BEAMS (SEE FIGURE 1) SHALL BE CLEANED PER NEAR WHITE BLAST CLEANING SSPC-SP10. BEAMS, ETC. INSTALLED DURING THE 2007 WIDENING CONTRACT 60B86 SHALL NOT BE CLEANED.

LOCATION 4 [SN 045-0004]

ALL BEAMS, BEARINGS AND OTHER STRUCTURAL STEEL WITHIN FIVE FEET SIX INCHES (5'-6"), (MEASURED ALONG THE BEAM/GIRDER) OF EITHER SIDE OF THE DECK JOINTS, SHALL BE CLEANED PER NEAR WHITE BLAST CLEANING SSPC-SP10. THE EXTERIOR SURFACES AND TOP AND BOTTOM OF THE BOTTOM FLANGE OF THE FASCIA BEAMS AND BEAMS 1 AND 5 EITHER SIDE OF LONGITUDINAL JOINT (INSIDE FACE AS EXTERIOR SURFACE) (SEE FIGURE 1) SHALL BE CLEANED PER NEAR WHITE BLAST CLEANING SSPC-SP10.

LOCATIONS 5 ([SN 056-0037) AND 6 (SN 056-0057)

ALL BEAMS, BEARINGS AND OTHER STRUCTURAL STEEL WITHIN FIVE (5) FT., (MEASURED ALONG THE BEAM) OF EITHER SIDE OF THE DECK JOINTS, SHALL BE CLEANED PER NEAR WHITE BLAST CLEANING SSPC-SP10. THE EXTERIOR SURFACES AND TOP AND BOTTOM OF THE BOTTOM FLANGE OF THE FASCIA BEAMS (SEE FIGURE 1) SHALL BE CLEANED PER NEAR WHITE BLAST CLEANING SSPC-SP10.

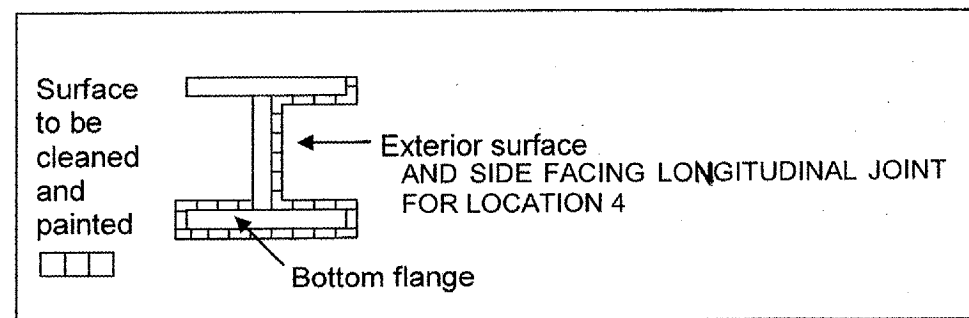

FASCIA BEAM PAINTING DETAIL

FIGURE 1

*	SN	FACIA LOCATION
LOC 1	099-0016	EAST ONLY
	099-0017	WEST ONLY
LOC 2	099-0018	EAST ONLY
	099-0019	NO FACIAS
LOC 3	099-0022	EAST ONLY
	099-0023	WEST ONLY

ORIGINAL FACIA LOCATIONS TO BE CLEANED

ILLINOIS DEPARTMENT OF TRANSPORTATION

GENERAL PAINT NOTES