

ROUTE	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
FAS 928	05-00060-00-RS	JOHNSON	7	3
PROJECT NO. RS-928 (105)			CONTRACT NO. 99333	

Location	Centerline (Yellow Dashed)	Edge Line (White Solid)	No Passing (Yellow Solid)
Sta. 99+50 to Sta. 173+25	1,560	14,750	7,400

See schedule below for limits of "No Passing Zones".
See Standard 78001 for typical pavement markings.

EAST BOUND LANE		WEST BOUND LANE	
Location	Length	Location	Length
Sta. 95+00 ² to Sta. 109+00	1,400'	Sta. 104+00 to Sta. 118+00 ¹	1,400'
Sta. 128+00 ¹ to Sta. 141+00	1,300'	Sta. 137+00 to Sta. 150+00 ¹	1,300'
Sta. 148+50 ¹ to Sta. 153+50	500'	Sta. 158+00 to Sta. 163+00 ¹	500'
Sta. 160+50 ¹ to Sta. 165+50	500'	Sta. 169+50 to Sta. 174+50 ²	500'
TOTALS	3,700'		3,700'



¹ Denotes location of "No Passing Zone" signs to be erected in accordance with Sign Schedule & Mounting Detail.

² "No Passing Zone" markings extend beyond limits of improvement due to existing alignment.

Location Station to Station	Length Feet	Prime Coat		Leveling Binder (MM)		Hot-Mix Asphalt Binder Course Tons	Hot-Mix Asphalt Surface Course Tons
		Bituminous Materials Gallons	Aggregate Tons	Full Lift Tons	Crown / SE Correction Tons		
EASTBOUND (RIGHT) LANE							
99+50 to 106+90	740.00	21.5	0.3	83.0	14.8	68.4	58.6
106+90 to 107+03	13.00	0.3		1.5		2.6	1.1
107+03 to 113+55	652.00	14.9	0.3	73.1	2.6	97.7	52.1
113+55 to 133+53	1998.00	45.8	0.6	224.1	54.8	82.7	159.9
133+53 to 138+75	522.00	11.9	0.2	58.5	21.2	17.5	41.8
138+75 to 144+21	546.00	12.5	0.2	61.2	2.8	109.8	43.7
144+21 to 150+46	625.00	14.3	0.2	70.1	29.5		50.0
150+46 to 156+19	573.00	13.1	0.2	64.3	29.3		45.8
156+19 to 173+25	1706.00	43.7	0.7	191.3	70.2		135.9
Subtotals for EastBound (Right) Lane		178.0	2.7	827.1	225.2	378.7	588.9
WESTBOUND (LEFT) LANE							
99+50 to 106+90	740.00	21.5	0.3	83.0	7.0	50.0	58.6
106+90 to 107+03	13.00	0.3		1.5	0.4		1.1
107+03 to 113+55	652.00	14.9	0.3	73.1	30.1		52.1
113+55 to 133+53	1998.00	45.8	0.6	224.1	73.7	10.5	159.9
133+53 to 138+75	522.00	11.9	0.2	58.5	6.7	89.6	41.8
138+75 to 144+21	546.00	12.5	0.2	61.2	34.7		43.7
144+21 to 150+46	625.00	14.3	0.2	70.1	20.3		50.0
150+46 to 156+19	573.00	13.1	0.2	64.3	8.1	56.8	45.8
156+19 to 173+25	1706.00	43.7	0.7	191.3	49.9	38.4	135.9
Subtotals for WestBound (Left) Lane		178.0	2.7	827.1	230.9	245.3	588.9
TOTALS		356.0	5.4	1654.2	456.1	624.0	1177.8

NOTE: Quantities shown do not include materials for entrances, side roads, and mailbox turnouts.

Location	Name	Signs		Post Length
		No.	Sq. Ft.	
Sta. 132+80 Rt.	REVERSE CURVE	W1-4R	6.25	16.0
Sta. 144+75 Lt.	REVERSE CURVE	W1-4R	6.25	16.0
Various (6)*	NO PASSING	W14-3	33.30	192.0
TOTALS			45.80	224.0

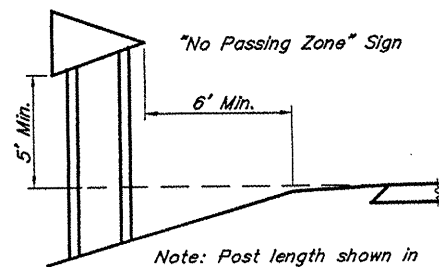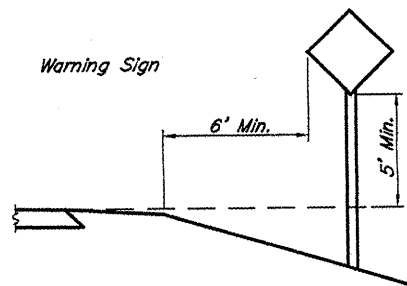

Note: Post length shown in schedule is total for two posts.

* See Schedule of "No Passing Zones" for sign locations. Each location will have one sign of 5.55 Sq. Ft. and two posts with a combined length of 32.0 Ft. Quantities shown are totals.

SIGN SCHEDULE & MOUNTING DETAIL

QUANTITY SCHEDULES
FAS ROUTE 928
SECTION 05-00060-00-RS
PROJECT NO. RS-928 (105)
JOHNSON COUNTY