

GRADING AROUND WINGWALLS

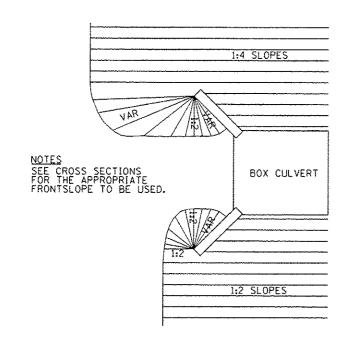

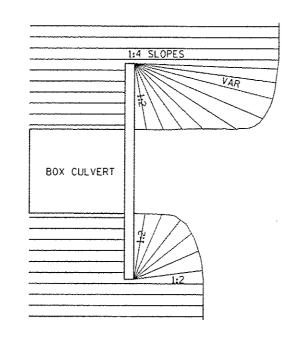


5-27-09

GRADING AROUND WINGWALLS


20.4

CAST-IN-PLACE REINFORCED CONCRETE END SECTIONS

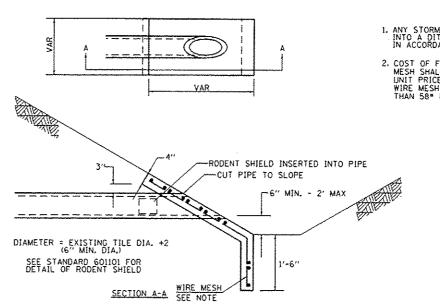

NOTES

- 1. ANY STORM SEWER OR FIELD TILE OUTLET INTO A DITCH SHALL HAVE A HEADWALL BUILT IN ACCORDANCE WITH THIS DETAIL
- 2. COST OF FURNISHING AND INSTALLING WIRE MESH SHALL BE INCLUDED IN THE CONTRACT UNIT PRICE EACH OF THE SIZE SPECIFIED. WIRE MESH TO WEIGH NOT LESS THAN 58° PER 100 SO. FI.




REVISED - 10-09-12

CAST-IN-PLACE REINFORCED CONCRETE END SECTIONS

28.4


DELINEATOR AND POST ORIENTATION

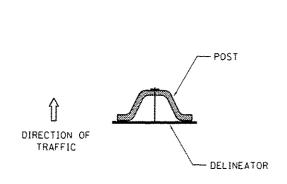


DELINEATORS SHALL BE INSTALLED ACCORDING TO STANDARD 635001 EXCEPT THAT THE POST SHALL BE ROTATED 180°. THE POST WILL HAVE THE WIDE SIDE FACING TRAFFIC AND THE DELINEATOR ATTACHECD AS SHOWN ABOVE.

ALL DIMENSIONS ARE IN INCHES UNLESS OTHERWISE NOTED.

REVISED - 10-03-11

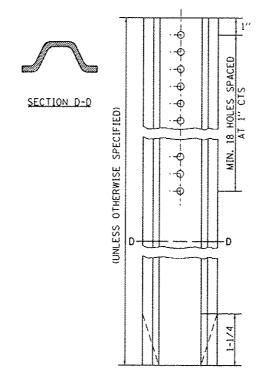

ROAD CLOSED TO OVERSIZED LOADS

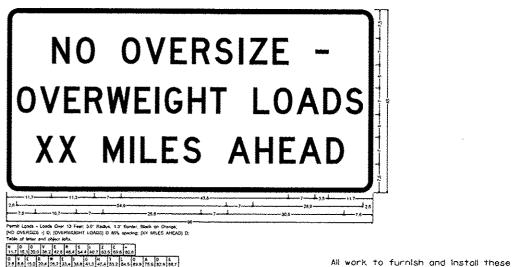

All work to furnish and install these
இது நடித்த ந

ALL DIMENSIONS ARE IN INCHES UNLESS OTHERWISE NOTED.

REVISED - 3-11-09
REVISED - REGION 2 / DISTRICT 2 STANDARD

REVISED - REVISED - SCALE: 188.8888 / 1-SHEET NO. OF SHEETS STA. TO STA. FED. ROAD DIST, NO. IILLINDISIFED. AND INC. IILLINDISIFED. AND PROJECT

DELINEATOR AND POST ORIENTATION

37.4 PLOT DATE - Mon Dec 10 13:33:10 20:2

ROAD CLOSED TO OVERSIZED LOADS

40.4