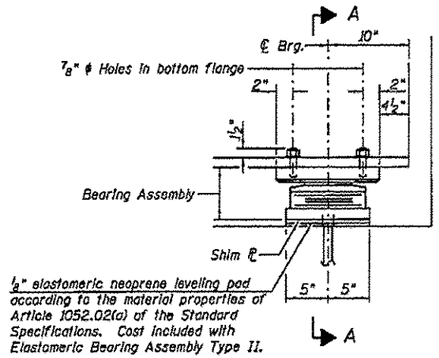

ELEVATION AT NORTH ABUT.

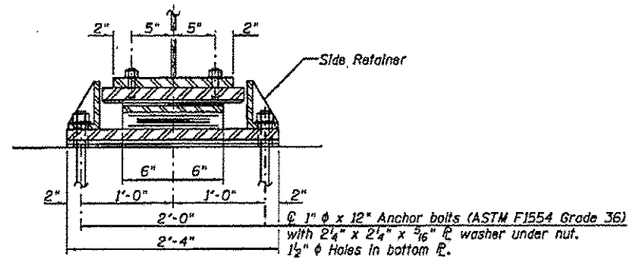

SECTION A-A

TYPE II ELASTOMERIC EXP. BRG.

(At North Abutment - 2 Required)

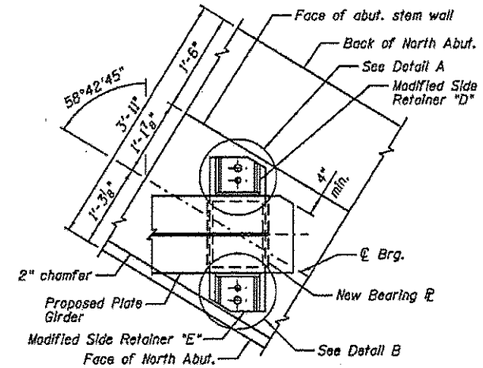

BEARING PLAN AT NORTH ABUTMENT

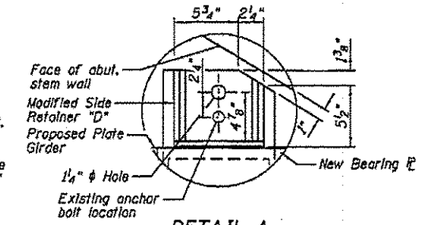

DETAIL A

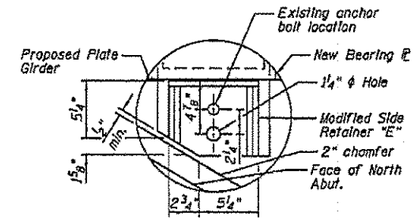

DETAIL B

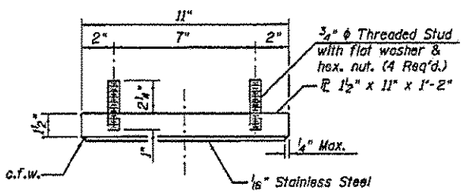

TOP BEARING ASSEMBLY



PLAN-PTFE SURFACE

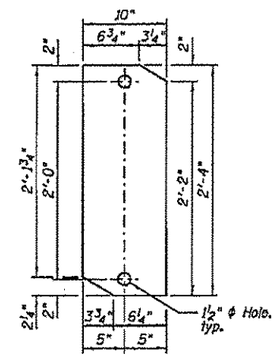

BOTTOM PLATE PLAN



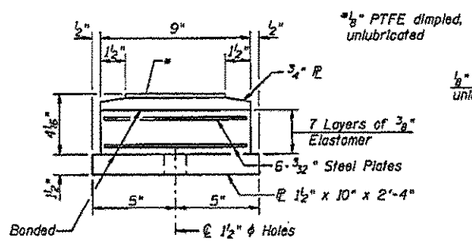

BOTTOM BEARING ASSEMBLY



SECTION THRU PTFE

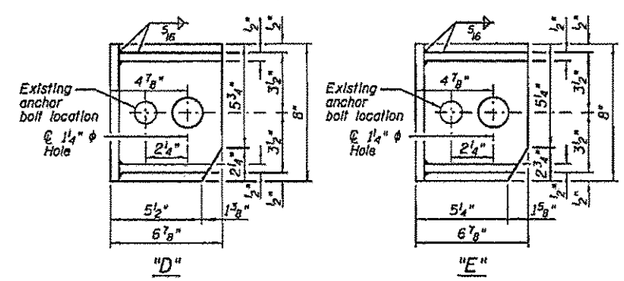

MODIFIED SIDE RETAINER

Equivalent rolled angle with stiffeners will be allowed in lieu of welded plates.

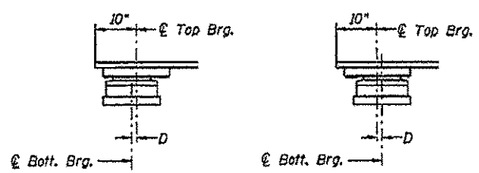

BELOW 50°F. (Move bott. brg. away from fixed brg.)

ABOVE 50°F. (Move bott. brg. toward fixed brg.)

SETTING ANCHOR BOLTS AT EXP. BRG.

D=1/8" per each 100' of expansion for every 15° temp. change from the normal temp. of 50°F.

Notes:

Anchor bolts shall be ASTM F1554 all-thread (or an Engineer-approved alternate material) of the grade(s) and diameter(s) specified. ASTM A307 Grade C anchor bolts may be used in lieu of ASTM F1554 Grade 36 (Fy=36ksi). The corresponding specified grade of AASHTO M314 anchor bolts may be used in lieu of ASTM F1554.

Anchor bolts for Type II bearings shall be placed in holes drilled in the concrete through holes in the bottom bearing plate after members are in place. Side retainers shall be placed after bolts are installed.

Drilled and set anchor bolts shall be installed according to Article 521.06 of the Standard Specifications.

Side retainers and other steel members required for the bearing assembly shall be included in the cost of Elastomeric Bearing Assembly, Type II.

The 1/8" PTFE sheet shall be bonded directly to the top steel plate with a two-component, medium viscosity epoxy resin, conforming to the requirements of the Federal Specification MMM-A-134, Type I. The bond agent shall be applied on the full area of the contact surfaces.

Bonding of 1/8" PTFE sheet during vulconizing process will be permitted provided the process and method of adjusting assembly height is approved by the Engineer.

BILL OF MATERIAL

Item	Unit	Total
Erecting Elastomeric Bearing Assembly, Type II	Each	2
Anchor Bolts, 1"	Each	4

NOTE:

Two 1/8 in. adjusting shims shall be provided for each bearing in addition to all other plates or shims and placed as shown on bearing details.

PROPOSED GIRDER TYPE II
BEARING DETAILS
STRUCTURE NO.084-0028

FOR INFORMATION ONLY

I-2E-2 10-1-08

FILE NAME = c:\documents and settings\mcdonaldrs\desktop\plansheet.dgn	USER NAME = mcdonaldrs	DESIGNED -	REVISED -	STATE OF ILLINOIS DEPARTMENT OF TRANSPORTATION	BEARING DETAILS	F.A.I RTE.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
		DRAWN -	REVISED -			55	06 PAINTING 2013	SANGAMON	26	16
	PLOT SCALE = 8.9898 ' / in.	CHECKED -	REVISED -					CONTRACT NO. 72F85		
Default	PLOT DATE = Nov-28-2012 01:29:12PM	DATE -	REVISED -		SCALE: SHEET OF SHEETS STA. TO STA.		ILLINOIS FED. AID PROJECT			