

EARTH EXCAVATION, RIGHT SIDE OF MAINLINE US 136


STATION	END AREA SQ FT		DIST FT	AVG OF END AREAS SQ FT		EARTHWORK VOL CU YD	
	CUT	FILL		CUT	FILL	CUT	FILL
RIGHT							
STA. 183 + 00	2.21	0	30	9	0.00	9.52	
STA. 183 + 30	14.92	0	13	18	0.00	8.56	
STA. 183 + 43	20.63	0	7	17	0.00	4.49	
STA. 183 + 50	14	0					
STA. 183 + 75	0	0	8	13	0.00	3.71	
STA. 183 + 83	25.06	0	17	28	0.00	17.56	
STA. 184 + 00	30.71	0	50	26	0.00	48.81	
STA. 184 + 50	22	0	24	18	0.00	16.01	
STA. 184 + 74	14.03	0	26	10	0.00	9.99	
STA. 185 + 00	6.71	0	50	10	0.00	18.23	
STA. 185 + 50	12.98	0	50	14	0.00	26.03	
STA. 186 + 00	15.13	0	50	14	0.00	25.43	
STA. 186 + 50	12.33	0	50	15	0.00	27.60	
STA. 187 + 00	17.48	0	50	11	0.80	20.17	1.48
STA. 187 + 50	4.3	1.6	8	3	1.43	0.84	0.42
STA. 187 + 58	1.37	1.25	17	1	0.63	0.43	0.39
STA. 187 + 75	0	0					
STA. 251 + 34	5.83	0	8	6	0.00	1.73	
STA. 251 + 42	5.83	0	11	4	0.00	1.60	
STA. 251 + 53	2	0	26	2	0.00	1.93	
STA. 251 + 79	2	0	11	4	0.00	1.60	
STA. 251 + 90	5.83	0	10	6	0.00	2.16	
STA. 252 + 00	5.83	0					

EARTH EXCAVATION, RIGHT SIDE OF MAINLINE US 136

STATION	END AREA SQ FT		DIST FT	AVG OF END AREAS SQ FT		EARTHWORK VOL CU YD	
	CUT	FILL		CUT	FILL	CUT	FILL
RIGHT							
STA. 326 + 00	0	1.89	50	0	2.45		4.53
STA. 326 + 50	0	3	50	0	2.45		4.54
STA. 327 + 00	0	1.9	50	0	1.94		3.59
STA. 327 + 50	0	1.98	50	0	2.07		3.82
STA. 328 + 00	0	2.15	50	0	2.25		4.17
STA. 328 + 50	0	2.35	50	0	3.39		6.28
STA. 329 + 00	0	4.43	17	4	2.22	2.20	1.39
STA. 329 + 13	0	4.43	54	0	5.27		10.54
STA. 329 + 17	7	0	50	4	3.06	6.48	5.66
STA. 329 + 47	7	0	53	4	3.06	6.87	6.00
STA. 329 + 67	0	6.11	33	0	6.11		7.47
STA. 330 + 00	0	6.11	50	0	4.24		7.84
STA. 330 + 50	0	2.36	25	0	1.18		1.09
STA. 330 + 75	0	0					
SUBTOTAL RIGHT						261.92	69.22

LOCATION	EARTHWORK			
	EARTH EXCAVATION 20200100 CU YD	Earth Excavation Adjusted for shrinkage CU YD	Embankment CU YD	Earthwork Balance Balance Waste (+) or Shortage (-) CU YD
LEFT	653.23	522.58	75.65	446.93
RIGHT	261.92	209.54	69.22	140.32
TOTALS=	915.2	732.1	144.9	587.3

•• Shrinkage Factor = 20%

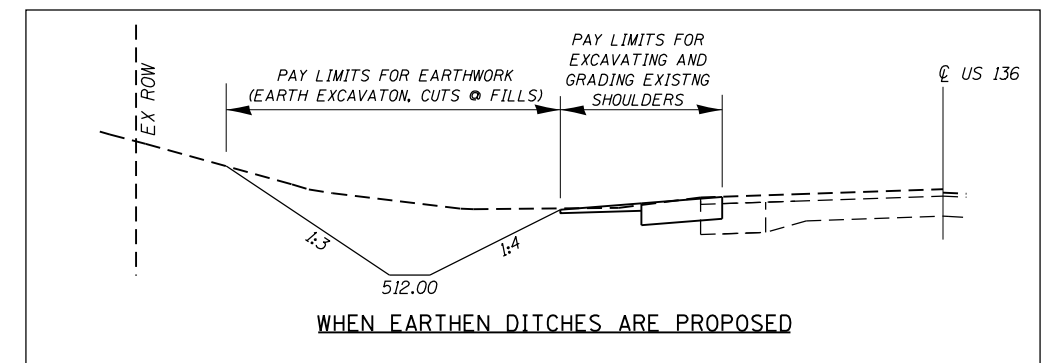

FILE NAME =	USER NAME = sparksgw	DESIGNED - RTS	REVISED -
Default	093-sht-schedule.dgn	DRAWN - RTS	REVISED -
	PLOT SCALE = 100.0000' / 1" =	CHECKED -	REVISED -
	PLOT DATE = May-01-2014 09:31:13AM	DATE - 3-24-2014	REVISED -

STATE OF ILLINOIS
DEPARTMENT OF TRANSPORTATION

SCHEDULES OF QUANTITIES

SCALE: SHEET 1 OF 5 SHEETS STA. TO STA.

F.A.P. RTE.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
315	(123) I-1	MASON	64	7
ILLINOIS FED. AID PROJECT			CONTRACT NO. 72G93	