




TYPICAL SECTION
 STA. 179+35.53 TO 179+55.32
 STA. 180+60.58 TO 180+80.52

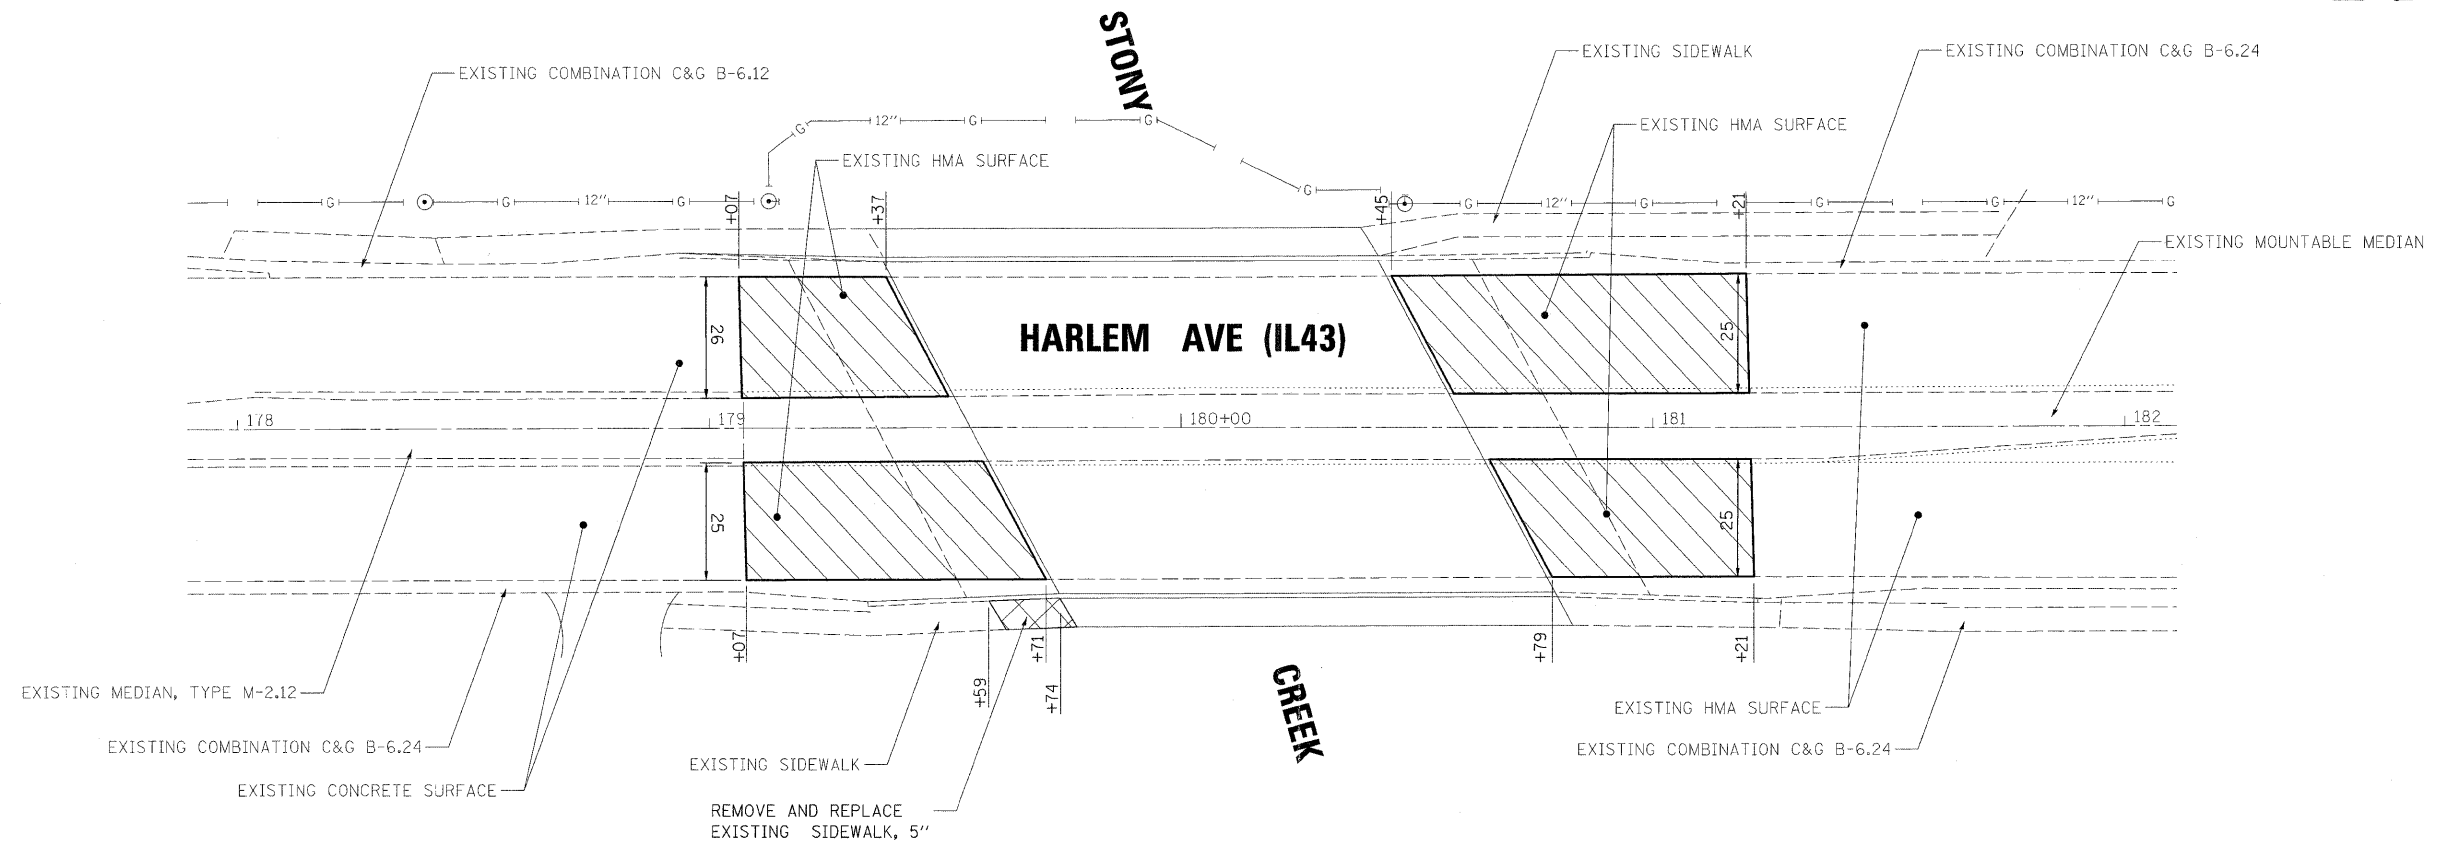

 PROP. HOT-MIX ASPHALT SURFACE REMOVAL, 2 1/2"
 PROP. POLYMERIZED HOT-MIX ASPHALT SURFACE COURSE, MIX "F", N90, 1/2"

MIXTURE REQUIREMENTS		
MIXTURE USES	AC TYPE	VOIDS
POLYMERIZED HOT-MIX ASPHALT SURFACE COURSE, MIX "F", N90, IL-9.5mm	SBS / SBR PG 70-22	4% @ 90 GYR.
LEVELING BINDER (MACHINE METHOD), N70, IL-9.5mm	PG 64-22 *	4% @ 70 GYR.

NOTES:
 THE UNIT WEIGHT USED TO CALCULATE ALL HOT-MIX ASPHALT SURFACE MIXTURES IS 112 LBS/SQ YD/IN.
 *WHEN RAP EXCEEDS 20% , THE NEW ASPHALT BINDER IN THE MIX SHALL BE PG 58-22.

PLOT DATE = 2/12/2009
 PLOT SCALE = 1/8"=1'-0"
 USER NAME = JTFreese
 MODEL = Default



200 West Front Street
 Wheaton, IL 60187

DESIGNED - B.B.	REVISED -
DRAWN - J.T.T.	REVISED -
CHECKED - M.K.	REVISED -
DATE - 1/30/09	REVISED -

STATE OF ILLINOIS
 DEPARTMENT OF TRANSPORTATION

IL-43 OVER STONY CREEK
 STRUCTURE NO. 016-0322

ROADWAY PLAN

F.A.P. RTE.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
346	3128-Z-B-1	COOK	35	4
CONTRACT NO. 60D70				

SCALE: 1:20 SHEET NO. 4 OF 35 SHEETS STA. TO STA.

FED. ROAD DIST. NO. 1 ILLINOIS FED. AID PROJECT