



Illinois Department of Transportation

2300 South Dirksen Parkway / Springfield, Illinois / 62764

May 29, 2025

SUBJECT FAU Route 2798 (Niles Center Rd)
Section 2024-1030-RS
Cook County
Contract No. 62X70
Item No. 22, June 16, 2025 Letting
Addendum A

NOTICE TO PROSPECTIVE BIDDERS:

Attached is an addendum to the plans or proposal. This addendum involves revised and/or added material.

1. Revised the Schedule of Prices
2. Revised page ii of the Table of Contents to the Special Provisions
3. Added pages 112-114 to the Special Provisions
4. Revised sheets 1, 2, 3, 4, 5, 8, & 9 of the Plans

Prime contractors must utilize the enclosed material when preparing their bid and must include any changes to the Schedule of Prices in their bid.

Very truly yours,

A handwritten signature in black ink, appearing to read 'Jack A. Elston'.

Jack A. Elston, P.E.
Bureau Chief, Design and Environment

MTS

PERFORMANCE GRADED ASPHALT BINDER (BDE)	89
REMOVAL AND DISPOSAL OF REGULATED SUBSTANCES (BDE)	95
SHORT TERM AND TEMPORARY PAVEMENT MARKINGS (BDE).....	96
SUBCONTRACTOR AND DBE PAYMENT REPORTING (BDE)	100
SUBCONTRACTOR MOBILIZATION PAYMENTS (BDE).....	100
SUBMISSION OF BIDDERS LIST INFORMATION (BDE)	101
SUBMISSION OF PAYROLL RECORDS (BDE)	101
SURFACE TESTING OF PAVEMENTS – IRI (BDE).....	102
SURVEYING SERVICES (BDE)	108
VEHICLE AND EQUIPMENT WARNING LIGHTS (BDE).....	108
WEEKLY DBE TRUCKING REPORTS (BDE).....	109
WORK ZONE TRAFFIC CONTROL DEVICES (BDE).....	109
WORKING DAYS (BDE)	111
REMOVAL AND DISPOSAL OF REGULATED SUBSTANCES (PROJECT SPECIFIC).....	112
TELEVISION INSPECTION OF SEWER (PROJECT SPECIFIC)	113

Revised 5/29/2025

REMOVAL AND DISPOSAL OF REGULATED SUBSTANCES (PROJECT SPECIFIC)

Description. This work shall consist of the removal and disposal of regulated substances according to Section 669 of the Standard Specifications as revised below.

Contract Specific Sites. The excavated soil and groundwater within the areas listed below shall be managed as either “uncontaminated soil”, hazardous waste, special waste or non-special waste. For stationing, the lateral distance is measured from centerline and the farthest distance is the offset distance or construction limit, whichever is less.

Soil Disposal Analysis. When the waste material requires sampling for landfill disposal acceptance, the Contractor shall secure a written list of the specific analytical parameters and analytical methods required by the landfill. The Contractor shall collect and analyze the required number of samples for the parameters required by the landfill using the appropriate analytical procedures. A copy of the required parameters and analytical methods (from landfill email or on landfill letterhead) shall be provided as Attachment 4A of the BDE 2733 (Regulated Substances Final Construction Report). The price shall include all sampling materials and effort necessary for collection and management of the samples, including transportation of samples from the job site to the laboratory. The Contractor shall be responsible for determining the specific disposal facilities to be utilized; and collect and analyze any samples required for disposal facility acceptance using a NELAP certified analytical laboratory registered with the State of Illinois.

Intersection of Niles Center Road and Carol Street, Skokie, Cook County

- All excavation planned at the northwest quadrant, northeast quadrant, southwest quadrant, and southeast quadrant at the intersection of Niles Center Road and Carol Street. The Engineer has determined this material meets the criteria of and shall be managed in accordance with Article 669.05(a)(1). Potential contaminants of concern sampling parameters: VOCs, SVOCs and Metals.

Intersection of Niles Center Road and Main Street, Skokie, Cook County

- All excavation planned at the northwest quadrant at the intersection of Niles Center Road and Main Street. The Engineer has determined this material meets the criteria of and shall be managed in accordance with Article 669.05(a)(5). Potential contaminants of concern sampling parameters: VOCs, SVOCs and Metals.
- All excavation planned at the northeast quadrant, southwest quadrant, and southeast quadrant at the intersection of Niles Center Road and Main Street. The Engineer has determined this material meets the criteria of and shall be managed in accordance with Article 669.05(a)(1). Potential contaminants of concern sampling parameters: VOCs, SVOCs and Metals.

Work Zones

Three distinct OSHA HAZWOPER work zones (exclusion, decontamination, and support) shall apply to projects adjacent to or within sites with documented leaking underground storage tank (LUST) incidents, or sites under management in accordance with the requirements of the Site Remediation Program (SRP), Resource Conservation and Recovery Act (RCRA), or Comprehensive Environmental Response, Compensation and Liability Act (CERCLA), or as deemed necessary. For this project, the work zones apply for the following ISGS PESA Sites:

None

Added 5/29/2025

TELEVISION INSPECTION OF SEWER (PROJECT SPECIFIC)

Effective: May 16, 2025

Revised:

Description. This work shall consist of furnishing all labor, equipment, and materials necessary to televise and record the interior of a 12" storm sewer pipe. The purpose of the televising is to determine the exact location and nature of the pipe break.

The location of the estimated break, structures and pipes are shown on exhibit at the end of this special provision.

The Contractor shall furnish the Engineer a color copy of the recording.

The work may require dewatering of the existing upstream catch basin within the sidewalk.

The work may require televising from the existing downstream structure located on Lee St.

Equipment: The camera shall have a lens capable of viewing or rotating 360 degrees. The equipment shall be adequate to insure the completion of the work. All equipment to be used in the execution of this work shall be in a safe working condition and shall be subject to approval by the Engineer. Equipment that is not approved, shall be repaired or removed from the work site as required by the Engineer.


General: Structures and pipes shall be cleaned of any accumulation of silt, debris, or foreign matter of any kind, and shall be free from such accumulations at the time of televising.

Method of Measurement. This work will be measured for payment per foot of the storm sewer pipe televised.

Basis of Payment. This work will be paid for at the contract unit price per Foot for TELEVISION INSPECTION OF SEWER.

The cleaning of drainage structures and storm sewer pipes prior to televising, shall be paid for as DRAINAGE STRUCTURES TO BE CLEANED and STORM SEWERS TO BE CLEANED, of the diameter specified

Added 5/29/2025

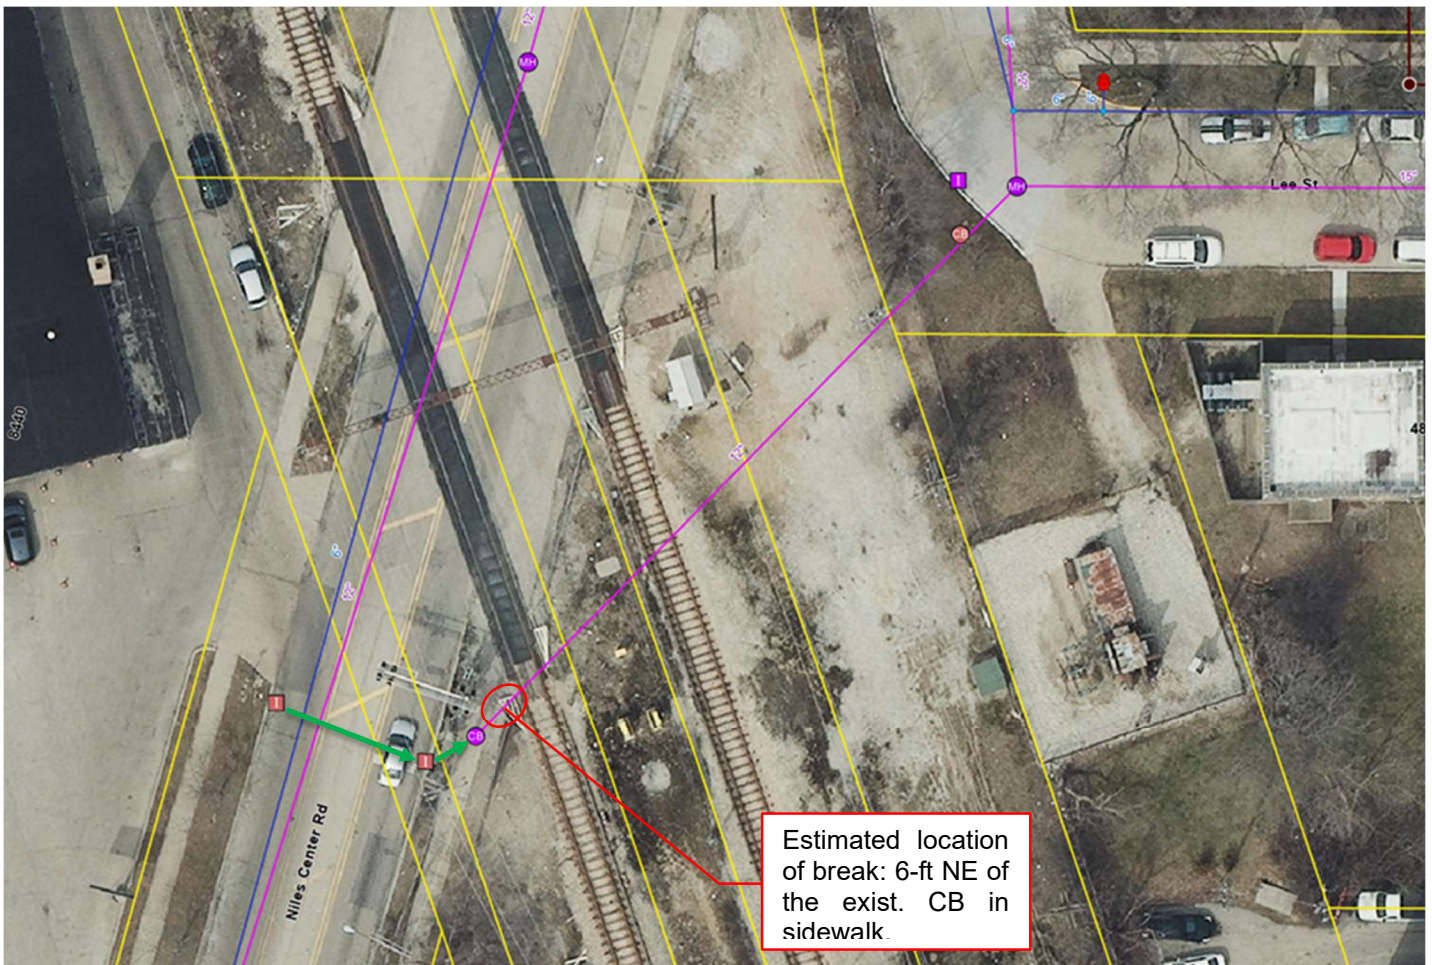

Location: Niles Center Rd at CTA tracks, just North of Main St, Village of Skokie.

Added 5/29/2025