


RELOCATED ILLINOIS 3  
STA. 787+03.50 TO STA. 790+40.00

NOTE: SEE STANDARD 606301-02 FOR KEYED CONST. JOINT DETAILS

SOLID MEDIAN DETAIL  
TYPE SM-6.24 MEDIAN (SPECIAL)  
STA. 787+03.50 TO STA. 790+40.00

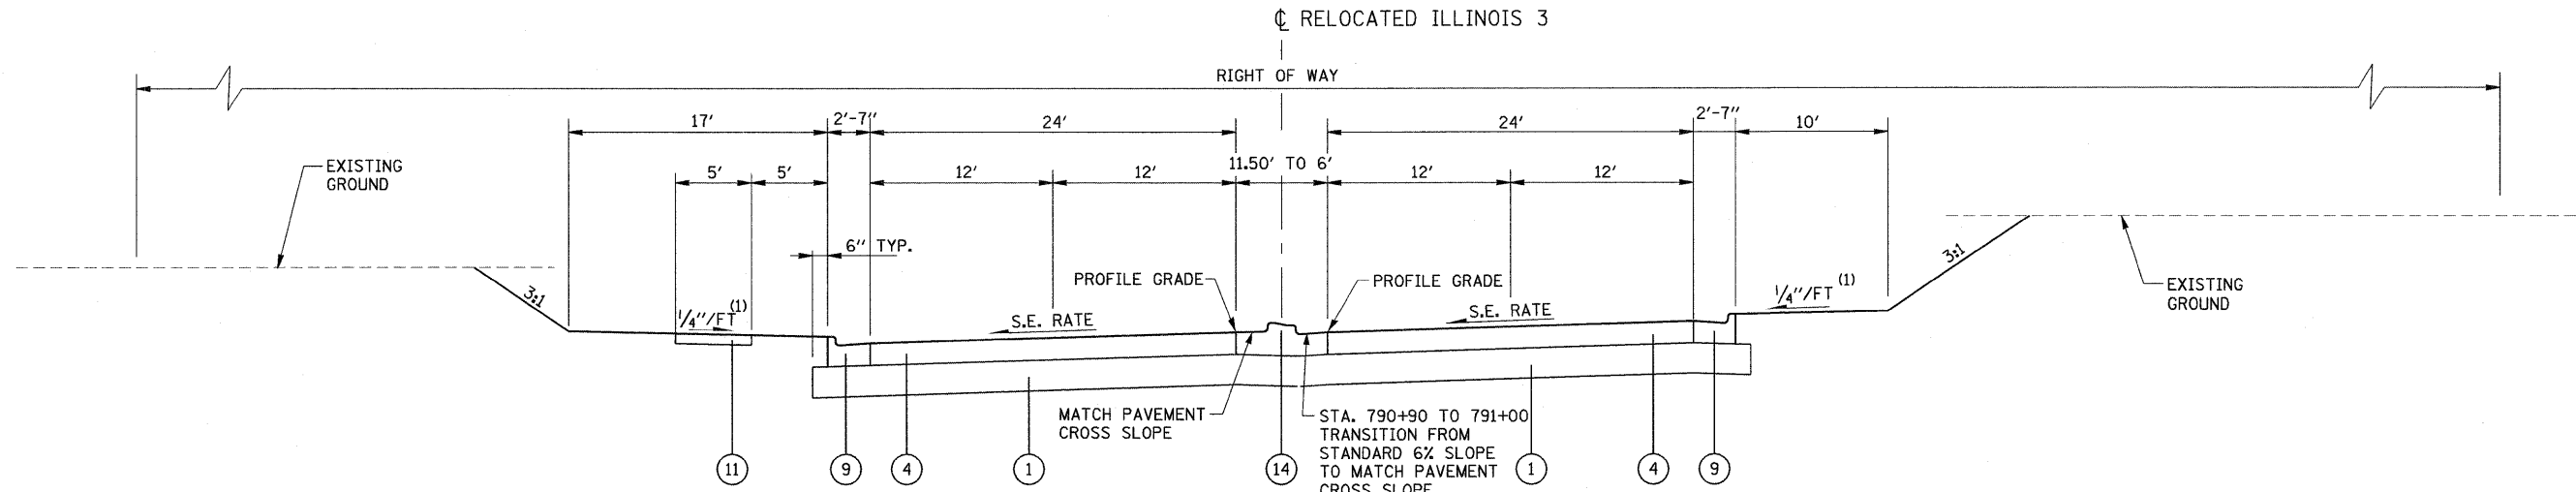

RELOCATED ILLINOIS 3  
STA. 790+40.00 TO STA. 791+51.30

ILLINOIS 3 SUPERELEVATION STATIONS

CURVE NO.	DIRECTION	BEGINNING CROSS SLOPE*	BEGIN S.E. TRANS. STA.	BEGIN FULL S.E. STA.	FULL S.E. RATE	END FULL S.E. STA.	END S.E. TRANS. STA.	ENDING CROSS SLOPE*
185	NORTHBOUND	-0.010	786+67.59	788+37.59	0.040	790+86.61	792+36.61	-0.0039
185	SOUTHBOUND	0.015	787+39.26	788+19.26	0.040	791+04.94	791+84.94	0.0155

\* NEGATIVE CROSS SLOPE VALUES INDICATE SLOPES ADVERSE TO FULL SUPERELEVATION DIRECTION.

(1) SLOPE TOWARD CURB IN CUT SECTION;  
SLOPE AWAY FROM CURB IN FILL SECTION  
(2) SIDEWALK TRANSITIONS 5.0' FROM BACK OF CURB STA. 788+55 TO 3.5' FROM BACK OF CURB AT STA. 788+85, THEN TRANSITIONS 3.5' FROM BACK OF CURB STA. 788+95 TO 5.0' FROM BACK OF CURB AT STA. 789+25

LEGEND

- ① SUB-BASE GRANULAR MATERIAL, TYPE A 12"
- ② HOT MIX ASPHALT SHOULDERS
- ④ PORTLAND CEMENT CONCRETE PAVEMENT 10" (JOINTED) - STD. 420101
- ⑤ PORTLAND CEMENT CONCRETE SHOULDERS 10" - STD. 483001
- ⑦ COMBINATION CONCRETE CURB AND GUTTER, TYPE M-6.24 - STD. 606001
- ⑧ CONCRETE MEDIAN SURFACE, 4"
- ⑨ COMBINATION CONCRETE CURB AND GUTTER, TYPE B-6.24 - STD. 606001
- ⑩ COMBINATION CONCRETE CURB AND GUTTER, TYPE M-6.06 - STD. 606001
- ⑪ PORTLAND CEMENT CONCRETE SIDEWALK 4 INCH
- ⑫ CONCRETE MEDIAN TYPE SM-6.24 (SPECIAL) - STD 606301
- ⑳ HOT-MIX ASPHALT BINDER COURSE, VARIES 2.25" TO 12.5" (SEE TABLE)
- ㉑ 2.00" POLYMERIZED HOT-MIX ASPHALT SURFACE COURSE (SEE TABLE)
- ㉒ BITUMINOUS MATERIALS (PRIME COAT)
- ㉓ HOT-MIX ASPHALT SURFACE REMOVAL (COLD MILLING)