


LEFT SIDE PANEL

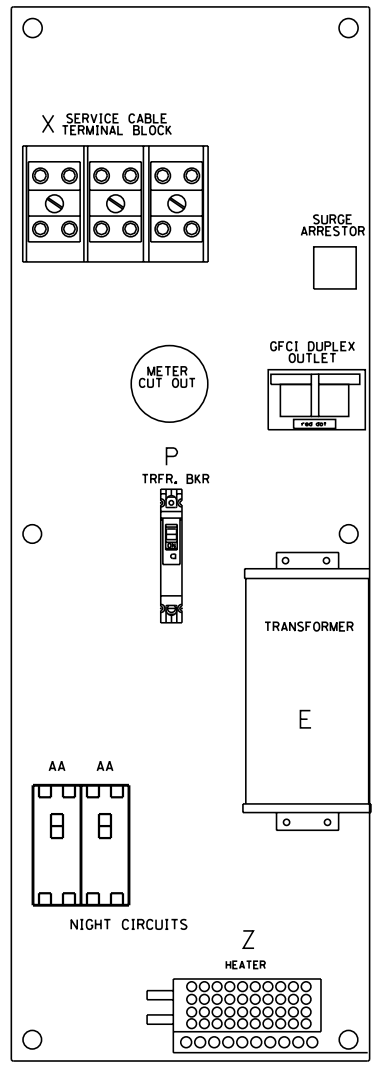

RIGHT SIDE PANEL

BILL OF MATERIALS		
ITEM	QTY	DESCRIPTION
A	2	FXD62B175 BREAKERS 2 POLE 175 AMP WITH AUX CONTACT
CI, C2	2	MECHANICAL CONTRACTOR 8903PBV10X11V39 2 POLE 200 AMP 240V COIL WITH AUX CONTACTS
D	3	SECTIONAL FUSE HOLDER
E	1	1.5 KVA 277V-240/120 TRANSFORMER
G	1	15 AMP GFCI
H	2	DOOR SWITCH
I	1	LIGHT FIXTURE
J	1	METER FITTING 1 PHASE 3 WIRE 200 AMP
K	1	SURGE ARRESTER
L	2	PANEL BOARD 480/240V 1 PHASE, 250 AMP COPPER BUS
M	1	LIGHTING CONTROL PANEL
N		
D		
P	3	BREAKER 1P 15A
O	2	COPPER GROUND AND NEUTRAL BUS 1 X 16 X 1/4
T		
V	20	TERMINAL BLOCKS
X	1	620 AMP SPLICE BLOCK
Y	1	CHROMALOX WR 80, 40-80 DEC THERMOSTAT
Z	1	HEATREX 276-10 375 WATT HEATER
AA	4	1-POLE, 15-AMP CIRCUIT BREAKER

FILE NAME = \$FILES\$ PEN TABLE = \$PENTBL\$



USER NAME = \$USER\$	DESIGNED - IAB	REVISED -
PLOT SCALE = \$SCALE\$	DRAWN - DL/TM	REVISED -
PLOT DATE = \$DATE\$ *TIME\$	CHECKED - YK	REVISED -
PLOT DRIVER = \$PLTDV\$	DATE - DEC 2012	REVISED -

STATE OF ILLINOIS
DEPARTMENT OF TRANSPORTATION

I-90/94 AT OHIO STREET
LIGHTING CONTROLLER, DUPLEX TYPE, SHEET NO. 1 OF 4

SCALE: NONE	SHEET NO. OF SHEETS	STA. TO STA.
-------------	---------------------	--------------

F.A.I. RTE.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
90/94	0303-474HB-R	COOK	368	171
FED. ROAD DIST. NO. 1 ILLINOIS FED. AID PROJECT			CONTRACT NO. 60F63	