




**PROPOSED EAST SCHWARZ STREET**  
 STA. 100+18.44 to STA. 101+22.47  
 (NOT TO SCALE)

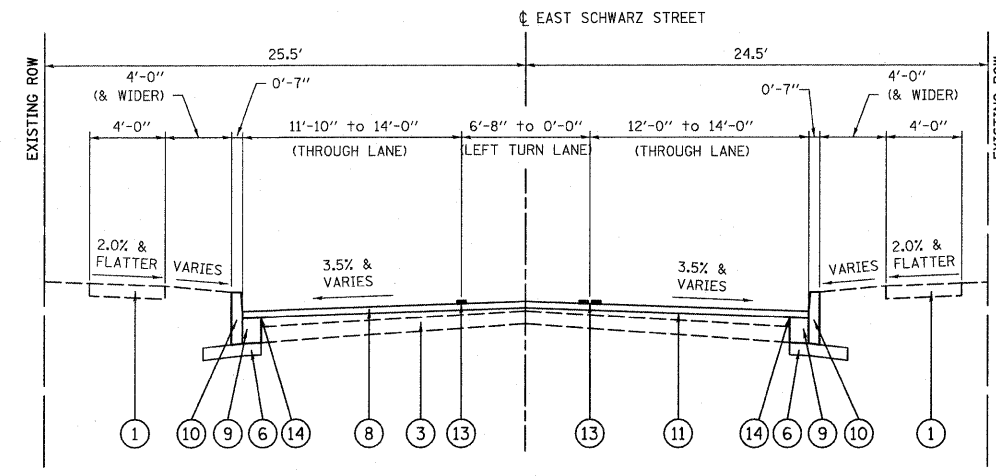

**PROPOSED EAST SCHWARZ STREET**  
 STA. 101+88.21 to STA. 102+38.41  
 (NOT TO SCALE)

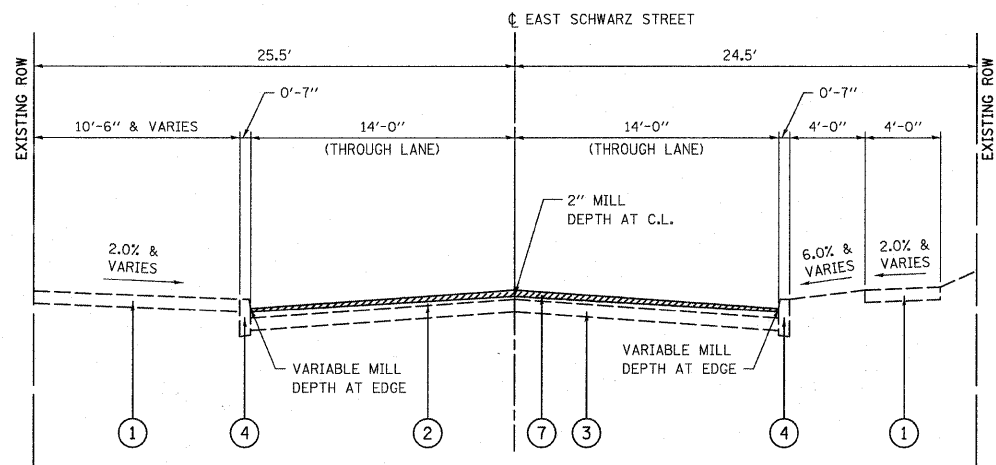

**EXISTING EAST SCHWARZ STREET MILLED**  
 STA. 100+18.44 to STA. 102+38.41  
 (NOT TO SCALE)

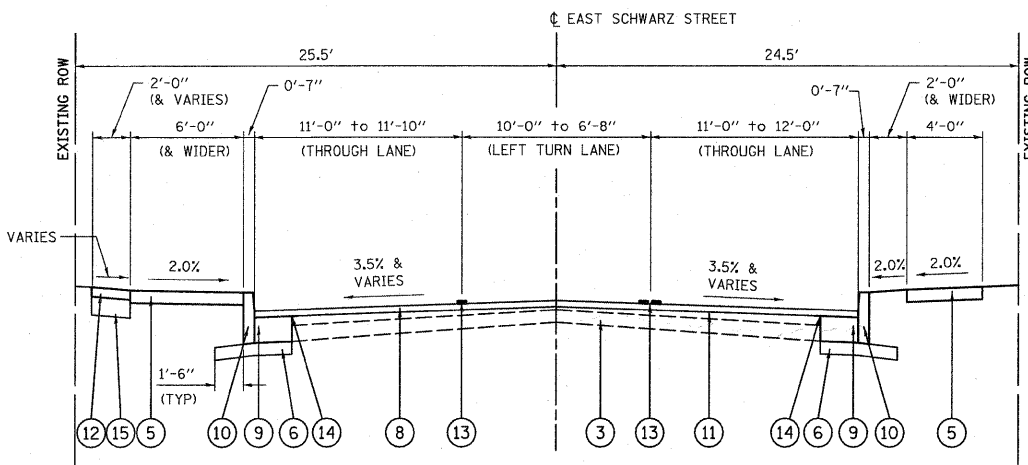


**PROPOSED EAST SCHWARZ STREET**  
 STA. 101+63.41 to STA. 101+88.21  
 (NOT TO SCALE)


ASPHALT MIXTURE REQUIREMENTS	
20 YR ESAL'S:	
MIXTURE USE	SURFACE COURSE
AC/PG	PG 70-22
RAP% (MAX)	10%
DESIGN AIR VOIDS	4% @ NDES = 70
MIX COMPOSITION (GRADATION MIXTURE)	IL 9.5
FRICION AGG	MIXTURE C

**LEGEND**

- ① EXISTING PORTLAND CEMENT CONCRETE SIDEWALK
- ② EXISTING HOT-MIX ASPHALT OVERLAY, VARIABLE DEPTH
- ③ EXISTING ASPHALT AND BRICK ROADWAY
- ④ EXISTING CONCRETE BARRIER CURB
- ⑤ PROPOSED PORTLAND CEMENT CONCRETE SIDEWALK, 4 INCH
- ⑥ PROPOSED SUBBASE GRANULAR MATERIAL, TYPE A, 4 INCH
- ⑦ PROPOSED HOT-MIX ASPHALT SURFACE REMOVAL, VARIABLE DEPTH
- ⑧ PROPOSED HOT-MIX ASPHALT SURFACE COURSE, 2 INCH, MIX C, N70
- ⑨ PROPOSED PORTLAND CEMENT CONCRETE BASE COURSE WIDENING, 10 INCH CONTRACTOR SHALL CONSTRUCT MONOLITHICALLY WITH THE CONCRETE CURB, ACCORDING TO ARTICLE 606.07.
- ⑩ PROPOSED CONCRETE CURB, TYPE B-6
- ⑪ PROPOSED BITUMINOUS MATERIALS (PRIME AND AGGREGATE COAT)
- ⑫ PROPOSED INCIDENTAL HOT-MIX ASPHALT, 3 INCH
- ⑬ PROPOSED THERMOPLASTIC PAVEMENT MARKING, 4 INCH
- ⑭ PROPOSED STRIP REFLECTIVE CRACK CONTROL TREATMENT
- ⑮ PROPOSED AGGREGATE BASE COURSE, TYPE A 6"

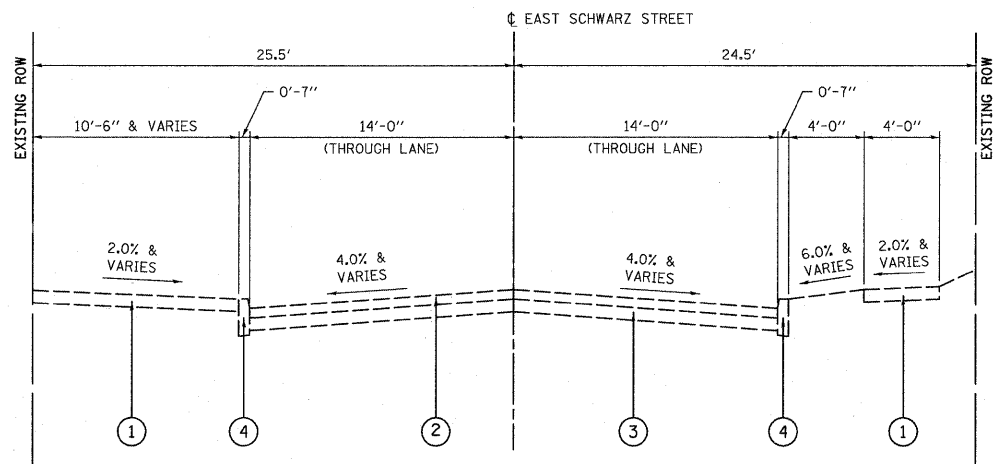

**EXISTING EAST SCHWARZ STREET**  
 STA. 100+18.44 to STA. 102+38.41  
 (NOT TO SCALE)

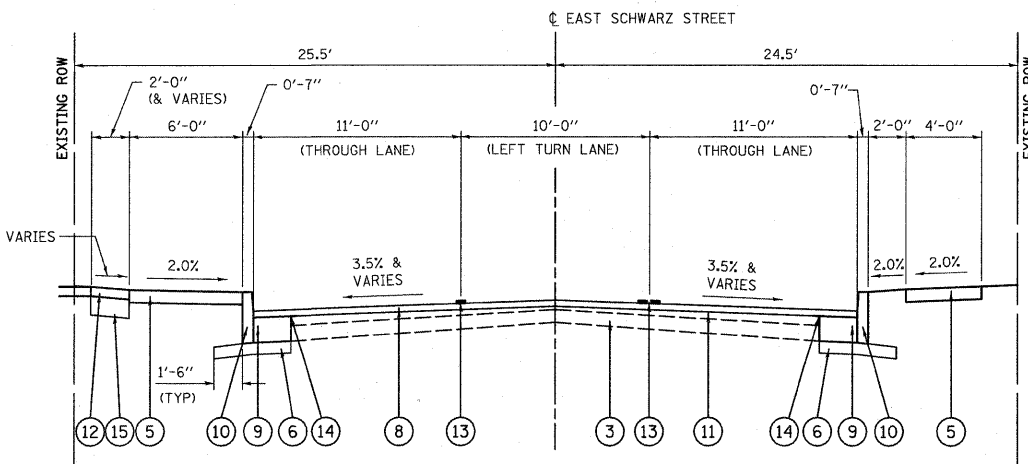

**PROPOSED EAST SCHWARZ STREET**  
 STA. 101+22.47 to STA. 101+63.41  
 (NOT TO SCALE)