



SLOPE STEPS DETAIL
TYPICAL CROSS-SECTION EMBANKMENT
CONSTRUCTION ON SIDEHILL

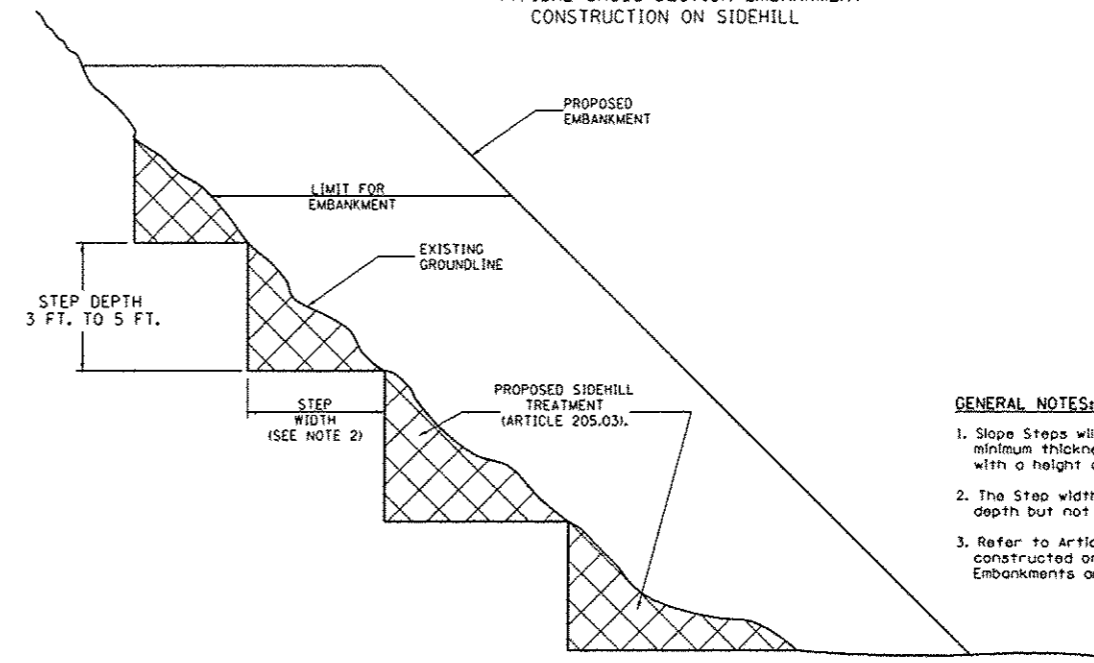

- GENERAL NOTES:**
- Slope Steps will be required for all 12(300) minimum thickness "silver fills" and on a fills with a height of 10'(3.0m).
 - The Step width shall be twice the Step depth but not less than 6 feet.
 - Refer to Article 205.03 for Embankment to be constructed on Hillside or Slopes, or if existing Embankments are to be widened.

REPLACEMENT MATERIAL:
 STANDARD EMBANKMENT
 (IN ACCORDANCE WITH
 205 OF THE STANDARD SPECIFICATION).

All dimensions are in inches millimeters unless otherwise noted.
 CAD: STD_200001-01

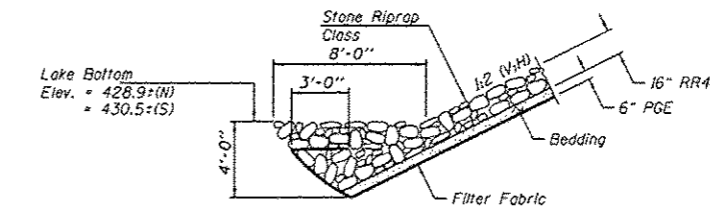

RIPRAP WITH FILTER FABRIC DETAIL

Note: All Excavation required for placement of Riprap shall be included in the cost for Stone Riprap.

FILE NAME =	USER NAME = Jim Michael	DESIGNED - CJW	REVISED -
L:\ADOT\118653\W014\0\CA\CA00_Sheets\0979.WD-14.Misc_Details.dgn		DRAWN - RAH	REVISED -
	PLOT SCALE = 100.0000' / 1" =	CHECKED - JMM	REVISED -
	PLOT DATE = 2/4/2013	DATE - FEBRUARY 2013	REVISED -

**STATE OF ILLINOIS
 DEPARTMENT OF TRANSPORTATION**

**MISCELLANEOUS DETAILS
 SPRING LAKE STATE PARK**

SCALE: SHEET NO. OF SHEETS STA. TO STA.

F.A. RTE.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
459	PARK ROADS	TAZEWELL	10	9
CONTRACT NO. 46261				
<small>ILLINOIS FED. AID PROJECT</small>				