
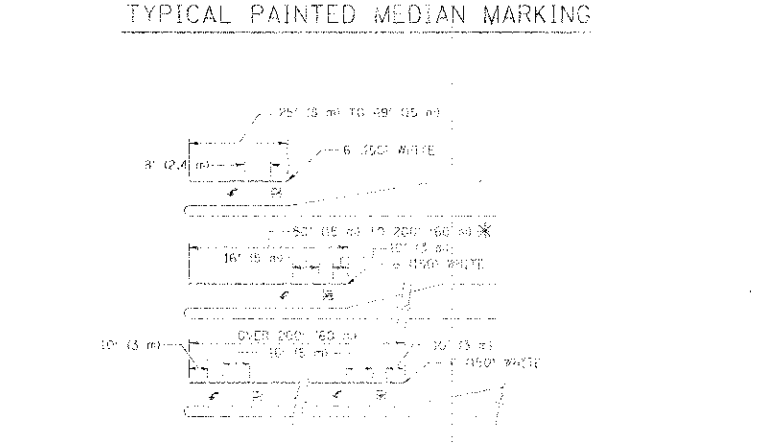


TYPICAL ISLAND MARKING

TYPICAL LANE AND EDGE LINE MARKING

TYPICAL PAINTED MEDIAN MARKING

TYPE OF MARKING	WIDTH OF LINE	PATTERN	COLOR	SPACING / DIMENSIONS
CENTERLINE ON 2-LANE PAVEMENT	4" (103 mm)	SOLID	YELLOW	10' (3.0 m) LINE WITH 30' (9.1 m) SPACE
CENTERLINE ON MULTI-LANE DIVIDED PAVEMENT	2" & 4" (51 mm)	SOLID	YELLOW	10' (3.0 m) LINE WITH 30' (9.1 m) SPACE
NO-PASSING ZONE LINES FOR ONE DIRECTION FOR 55 MPH (88 km/h)	4" (103 mm)	SOLID	YELLOW	10' (3.0 m) FROM SKIP-DASH CENTERLINE
NO-PASSING ZONE LINES FOR ONE DIRECTION FOR 50 MPH (80 km/h)	4" (103 mm)	SOLID	YELLOW	10' (3.0 m) FROM SKIP-DASH CENTERLINE
LANE LINES	4" (103 mm)	SOLID	WHITE	3' (0.9 m) LINE WITH 30' (9.1 m) SPACE
LANE LINES ON FOOTWAYS	2" (51 mm)	SOLID	WHITE	3' (0.9 m) LINE WITH 30' (9.1 m) SPACE
STOP LINES	24" (610 mm)	SOLID	WHITE	10' (3.0 m) FROM STOP SIGN
PAINTED MEDIANS	2" & 4" (51 mm)	SOLID	YELLOW	10' (3.0 m) FROM STOP SIGN
CROSSWALK LINES (PEDESTRIAN)	2" & 4" (51 mm)	SOLID	WHITE	10' (3.0 m) FROM STOP SIGN
CROSSWALK LINES (BIKE & EQUESTRIAN)	2" & 4" (51 mm)	SOLID	WHITE	10' (3.0 m) FROM STOP SIGN
STOP LINES	24" (610 mm)	SOLID	WHITE	10' (3.0 m) FROM STOP SIGN
PAINTED MEDIANS	2" & 4" (51 mm)	SOLID	YELLOW	10' (3.0 m) FROM STOP SIGN
CORNER MARKING AND CHANNELIZING LINES	8" (203 mm)	SOLID	WHITE	10' (3.0 m) FROM STOP SIGN
RAILROAD CROSSING	24" (610 mm)	SOLID	WHITE	10' (3.0 m) FROM STOP SIGN
SHOULDER DIAGONALS	12" (305 mm)	SOLID	WHITE	10' (3.0 m) FROM STOP SIGN

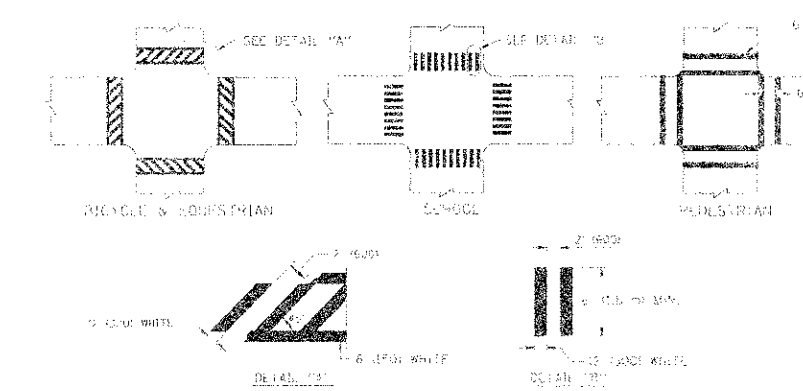

TYPICAL CROSSWALK MARKING

TYPICAL TURN LANE MARKING

FOR FURTHER DETAILS ON PAVEMENT MARKING REFER TO STANDARD SPECIFICATIONS FOR ROAD AND BRIDGE CONSTRUCTION AND STATE HIGHWAY MANUAL.