

EXISTING TYPICAL SECTION


**LEGEND**

1. EXISTING PAVEMENT
2. EXISTING COMBINATION CURB & GUTTER, TYPE M6.12
3. EXISTING GROUND
4. PROPOSED SOD
5. PROPOSED TOPSOIL, FURNISH & PLACE, 4"
6. PROPOSED PORTLAND CEMENT CONCRETE SIDEWALK, 5"
7. PROPOSED AGGREGATED SUBBASE, CA-6, 2"

**HOT-MIX ASPHALT REQUIREMENTS**

MIXTURE TYPE	AIR VOIDS @ Nds
HOT-MIX ASPHALT DRIVEWAYS, 3"	
HMA SURFACE COURSE, MIX "D", N50 (IL 9.5 mm) 3"	4% @ 50 GYRATIONS
<b>PATCHING</b>	
CLASS D PATCHES (HMA BINDER IL-19 mm), 6"	4% @ 70 GYRATIONS

NOTE: THE "ACTYPE" FOR POLYMERIZED HMA MIXES SHALL BE "S85/S98 PG 76-22" AND FOR NON-POLYMERIZED HMA THE "ACTYPE" SHALL BE "PG 64-22" UNLESS MODIFIED BY DISTRICT ONE SPECIAL PROVISIONS. FOR "PERCENT OF RAP" SEE SPECIAL PROVISIONS.

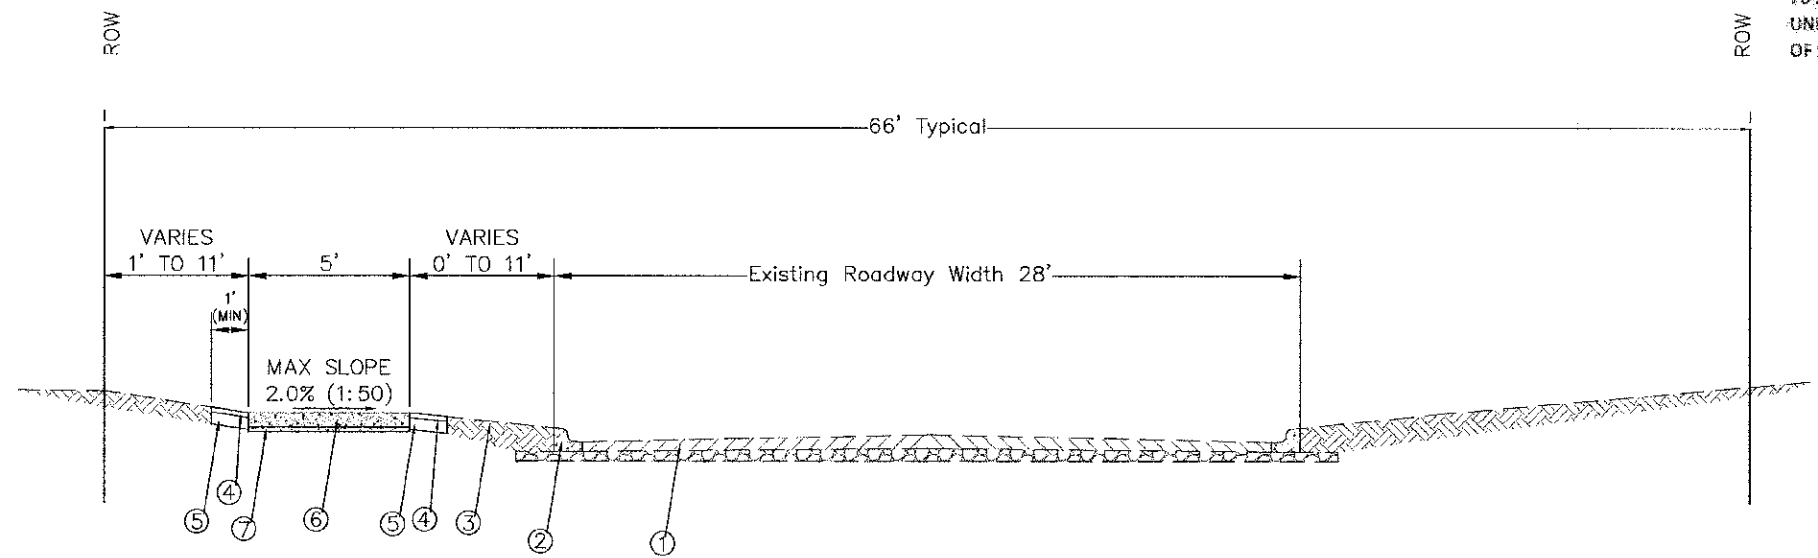

SIDEWALK SECTION

PROPOSED TYPICAL SECTION

TYPICAL ADT: 300  
 STREET TYPE: LOCAL RESIDENTIAL STREET  
 \*All sidewalks to meet ADA requirements.  
 Note: Drawing Not To Scale

DATE PLOTTED: 12/04/2012	DESIGNED - JFS	REVIEWED - 1/10/2013	STATE OF ILLINOIS DEPARTMENT OF TRANSPORTATION	2013 New Sidewalk Program Typical Sections		SECTION	COUNTY	SCALE: NONE	FIG. NO.	TOTAL FIGS.
	DRAWN - JFS	REVIEWED -		12-0010-00-07	DUPAGE	44	4			
	CHECKED - BK	REVIEWED -		CONTRACT NO. 63810						
	DATE - 12/04/2012	REVIEWED -		FBI, ROAD BUIL. DIV. 1   BUREAU   DIV. 40 PROJECT						