

TYPICAL SOLID VERTICAL PICKET (1/2" SQ. – STEEL TUBE) – 4" O.C. CENTER BETWEEN POSTS

TYPICAL SOLID TOP RAIL 1" X 1/2" FLAT STEEL

TYPICAL SOLID DIAMOND (1/4" SQ. – STEEL TUBE)

SEE ENLARGEMENT

TYPICAL PAINTED DECORATIVE FINIAL BALL

OVERALL HEIGHT @ 2" (BALL Ø @ 1–1/2")

TYPICAL SOLID MIDDLE RAIL 1" X 1/2" FLAT STEEL

TYPICAL SOLID BOTTOM RAIL 1" X 1/2" FLAT STEEL

TYPICAL POST (1½" SQ. – STEEL TUBE)

TYPICAL SURFACE MOUNTED CONNECTION


50

TYPICAL REINFORCED CONCRETE

1. ALL WELDS TO BE SMOOTH, FREE OF DEFECTS, CLEANED, PRIMED, AND PAINTED BLACK ACCORDING TO SPECIFICATIONS.

- 2. ALL WELDS SHALL BE MADE BY A CERTIFIED WELDER.
- 3. SUBMIT SHOP DRAWINGS FOR FENCE (PRIOR TO FABRICATION)

NOTE: ALL STEEL TO BE 16 GAUGE THOROUGH ACID WASHED AND CLEANED AND PRIMED WITH MIN. TWO COATS EXTERIOR GRADE RUSTIC INHIBITOR PRIMER. FIELD PRIME/PAINT BLACK PER APPROVED COLOR SAMPLE.

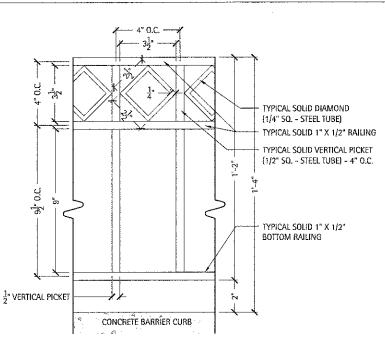

TYPICAL SAW-CUT CONTROL JOINT
AT CORNERS

TYPICAL 10 GAUGE STEEL BASE PLATE
5" SQ. BASE

TYPICAL POST (1½" SQ. - STEEL TUBE)
WELDED TO BASE PLATE

TYPICAL §* X 4" S.S. WEDGE ANCHOR BOLT
CORE INTO CURB, 4 BOLTS PER POST
NUT, WASHER AND CLIP TO BE 316 GRADE STAINLESS STEEL
INSTALL WEDGE PER MANUFACTURER'S SPECIFICATIONS
AND EMBEDMENT RECOMMENDATIONS

Typical Post Connection Detail

Scale: 1/4"=1'-0"

Typical Fence Enlargement
Scale: 1/4"=1'-0"

TYPICAL FILTER FABRIC (ALL SIDES) VARIES TYPICAL #4 HORIZONTAL SEE ENGINEERING PLAN TYP, 16" DECORATIVE METAL BARS @ 9" O.C., BARS TO VARIES SEE PLAN RAILING RUN CONTINUOUSLY THROUGH CONCRETE ½" DRAINAGE FABRIC EXPANSION JOINT MATERIAL TYPICAL COPTHORNE PAVER --(BANDING (BY UNILOCK) (2'-0", THREE [3]BRICKS) REINFORCED TINTED AND -SOLDIER COURSE planting SCORED CONCRETE, MINIMUM 5" THICK TYPICAL CONC. CURB. (SEE CIVIL ENGINEERING PLANS) TYPICAL COMPACTED BASE -COURSE, TYPE B, MINIMUM 6" PIN CONCRETE WALK TO -CONCRETE CURB AND CURBED PLANTER WITH 6" LONG #4 EPOXY COATED DOWELS @ 12" TYPICAL 8" WIDE REINFORCED CONCRETE CURB PLANTER WITH CONTINUOUS 3/4" CHAMFER ALONG TOP EDGE, CONCRETE TO BE TINTED THE SAME COLOR AS SIDEWALKS SAW CUT CONTROL JOINT EVERY 6' LENGTH OR AS SHOWN ON PLANS TYPICAL COMPACTED SUB-GRADE *NOTE: TOP OF CURB TO ALWAYS TYPICAL FILTER FABRIC TYPICAL COMPACTED BASE REMAIN LEVEL, (SEE GRADING PLAN (ALL SIDES) COURSE, TYPE B, MINIMUM FOR ELEVATIONS) 6" DEPTH TYP. PLANTING SOIL MIX. SEE SPECIFICATIONS TYPICAL GRAVEL FILL (CA-7) NO LIMESTONE FINES (MINIMUM 6")

Typical Concrete Curb Planter Detail
Scale: 1"=1'-0"

Typical Decorative Metal Railing Detail

Scale: 1"=1'-0"

SCALE 1" = 1'

L	PLOT DATE = \$DATE\$	DAIE -	REVISED		SCALE: AS SHOWN SHEET 1 OF 1 SHEETS STA. TO STA.		ILLINOIS FED. AID	PROJECT		
			E E E E E E E E E E E E E E E E E E E				,	33.1.1.17101	.,0. 00	
	PLOT SCALE = \$SCALE\$	CHECKED —	REVISED -	DEPARTMENT OF TRANSPORTATION		<u> </u>		CONTRACT	NO 6.	1723
	 	 		,	EDIVICIO DE (AILO	10-00	0149-00-LS	COOK	69	50
\$FILES\$		DRAWN —	REVISED	STATE OF ILLINOIS	PLANTER DETAILS	RIE.			onee (o)	NU.
FILE NAME =	USER NAME = \$USER\$	DESIGNED —	REVISED —	·		F.A.	SECTION	COUNTY	TOTAL	SHEET
										