




ROOF SLAB PLAN

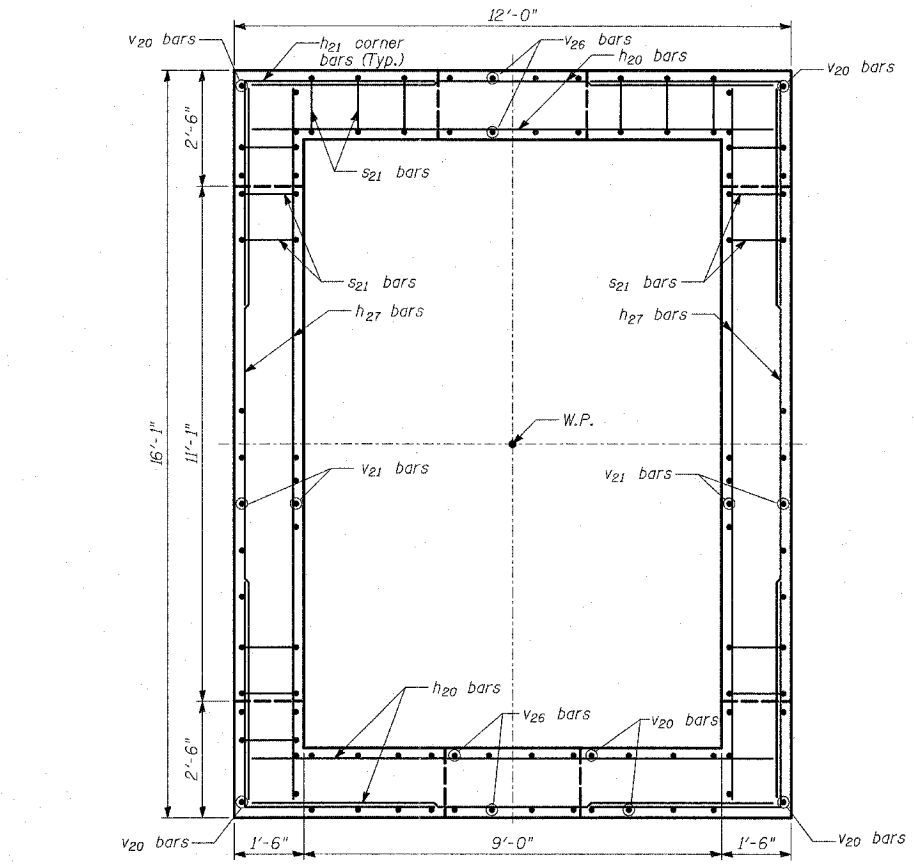


SECTIONAL PLAN G-G

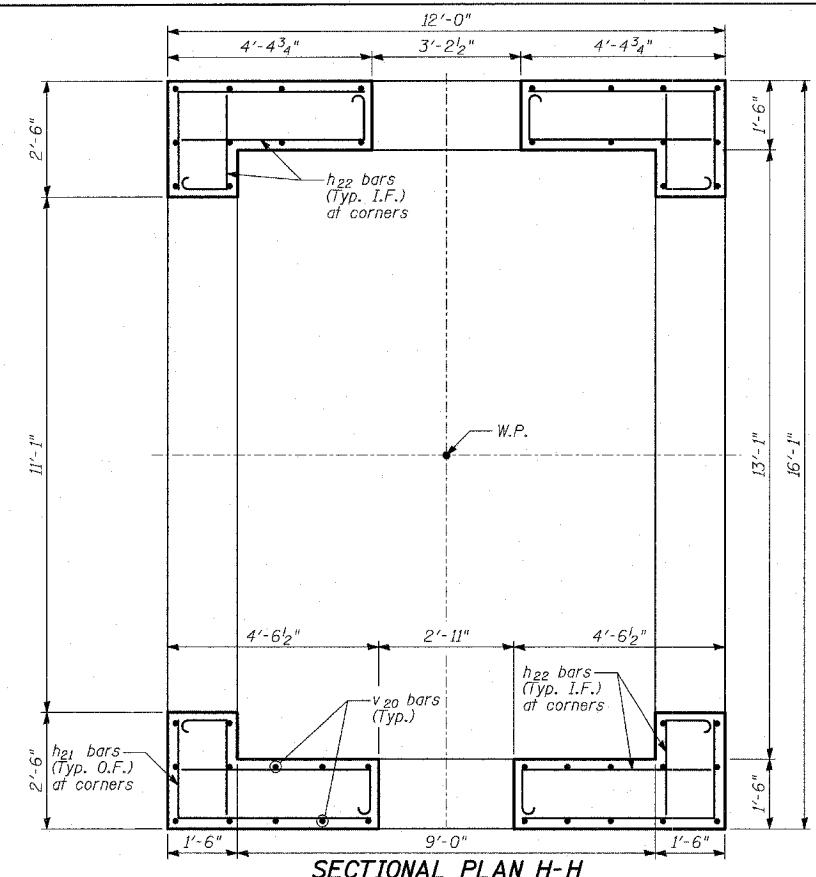


SECTIONAL PLAN H-H

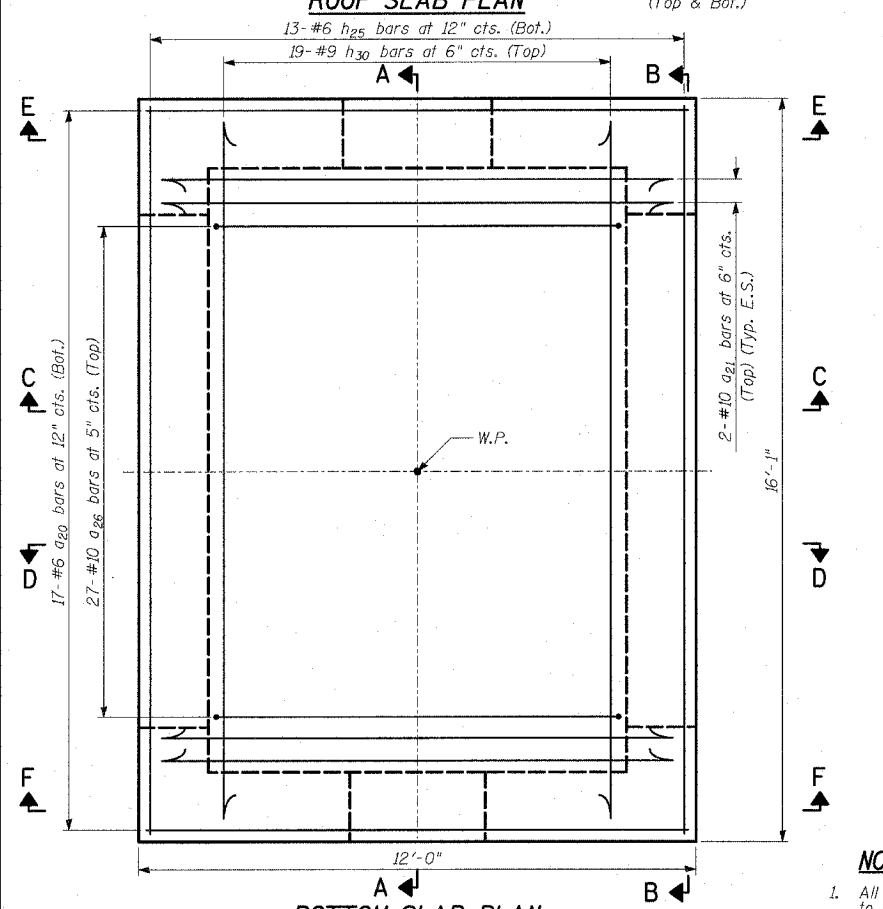

BOTTOM SLAB PLAN

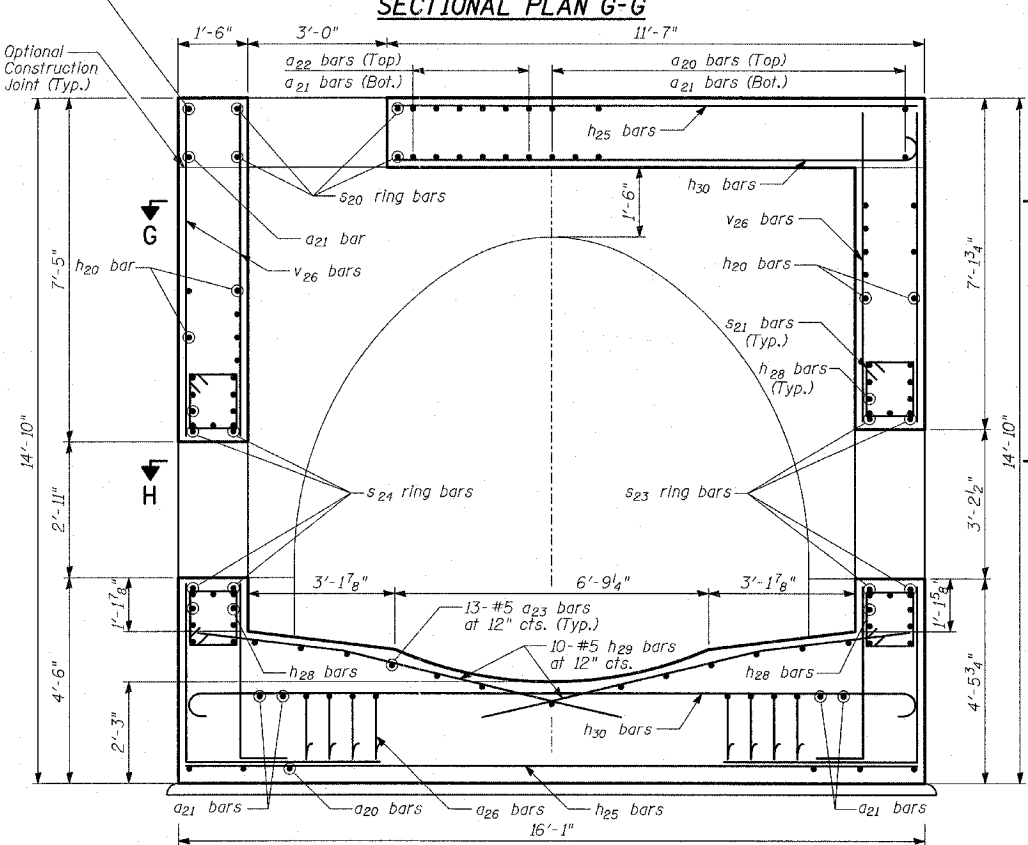

SECTION A-A

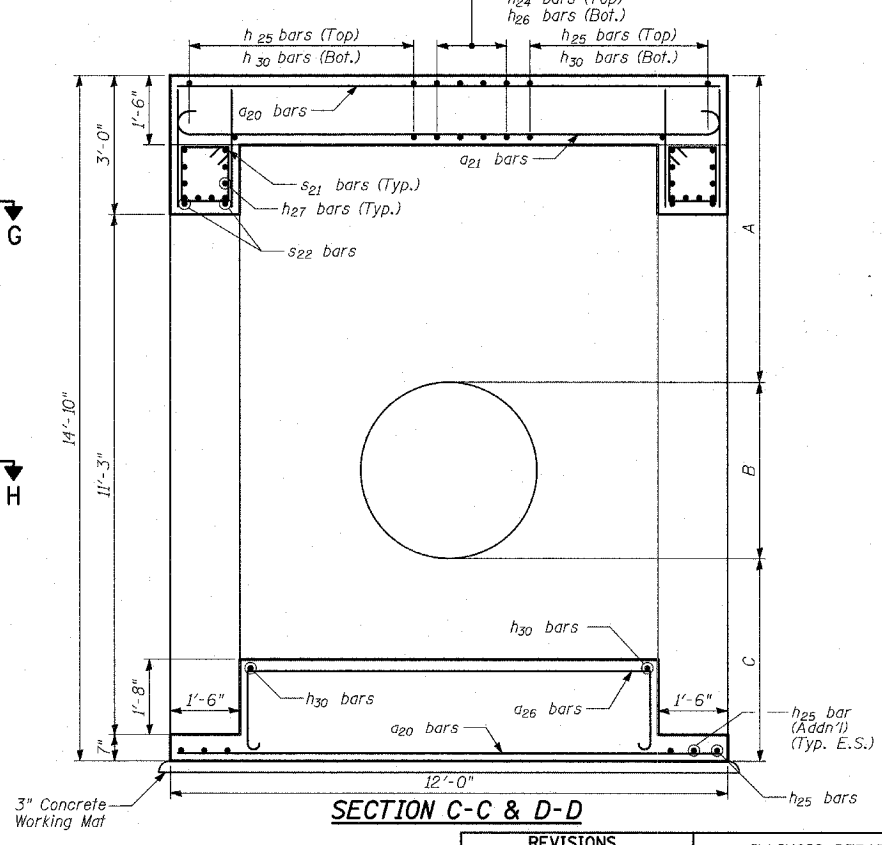

SECTION C-C & D-D

NOTES:

- All dimensions and elevations shall be field verified prior to construction.
 - Concrete pipe sizes shall be coordinated with openings provided into junction chamber before pouring concrete.
 - Manhole Frame, Ladder Rungs, and any inserts installation shall be coordinated with Roadway Plans.
 - Concrete cover for reinforcement steel to be 2" unless otherwise noted.
 - All concrete edges shall be chamfered 1 inch.
 - All lap splices marked on the drawings are minimum.
 - Concrete Compressive Strength $f_c' = 3,500$ psi.
 - Steel Yield Strength = 60,000 psi.
 - Work this Sheet with Sheets 1 and 3 of 3.
- * Cut bars to fit in field.
- E.F. - denotes Each Face
E.S. - denotes Each Side
I.F. - denotes Inside Face
O.F. - denotes Outside Face

REVISIONS	
NAME	DATE

ILLINOIS DEPARTMENT OF TRANSPORTATION
F.A.I. 94 (DAN RYAN EXPRESSWAY)
JUNCTION CHAMBER 73
DETAILS 1

S.N. _____
SCALE: _____
DATE: MARCH 1, 2006

DESIGNED BY: TD, DE
DRAWN BY: DE
CHECKED BY: MI