

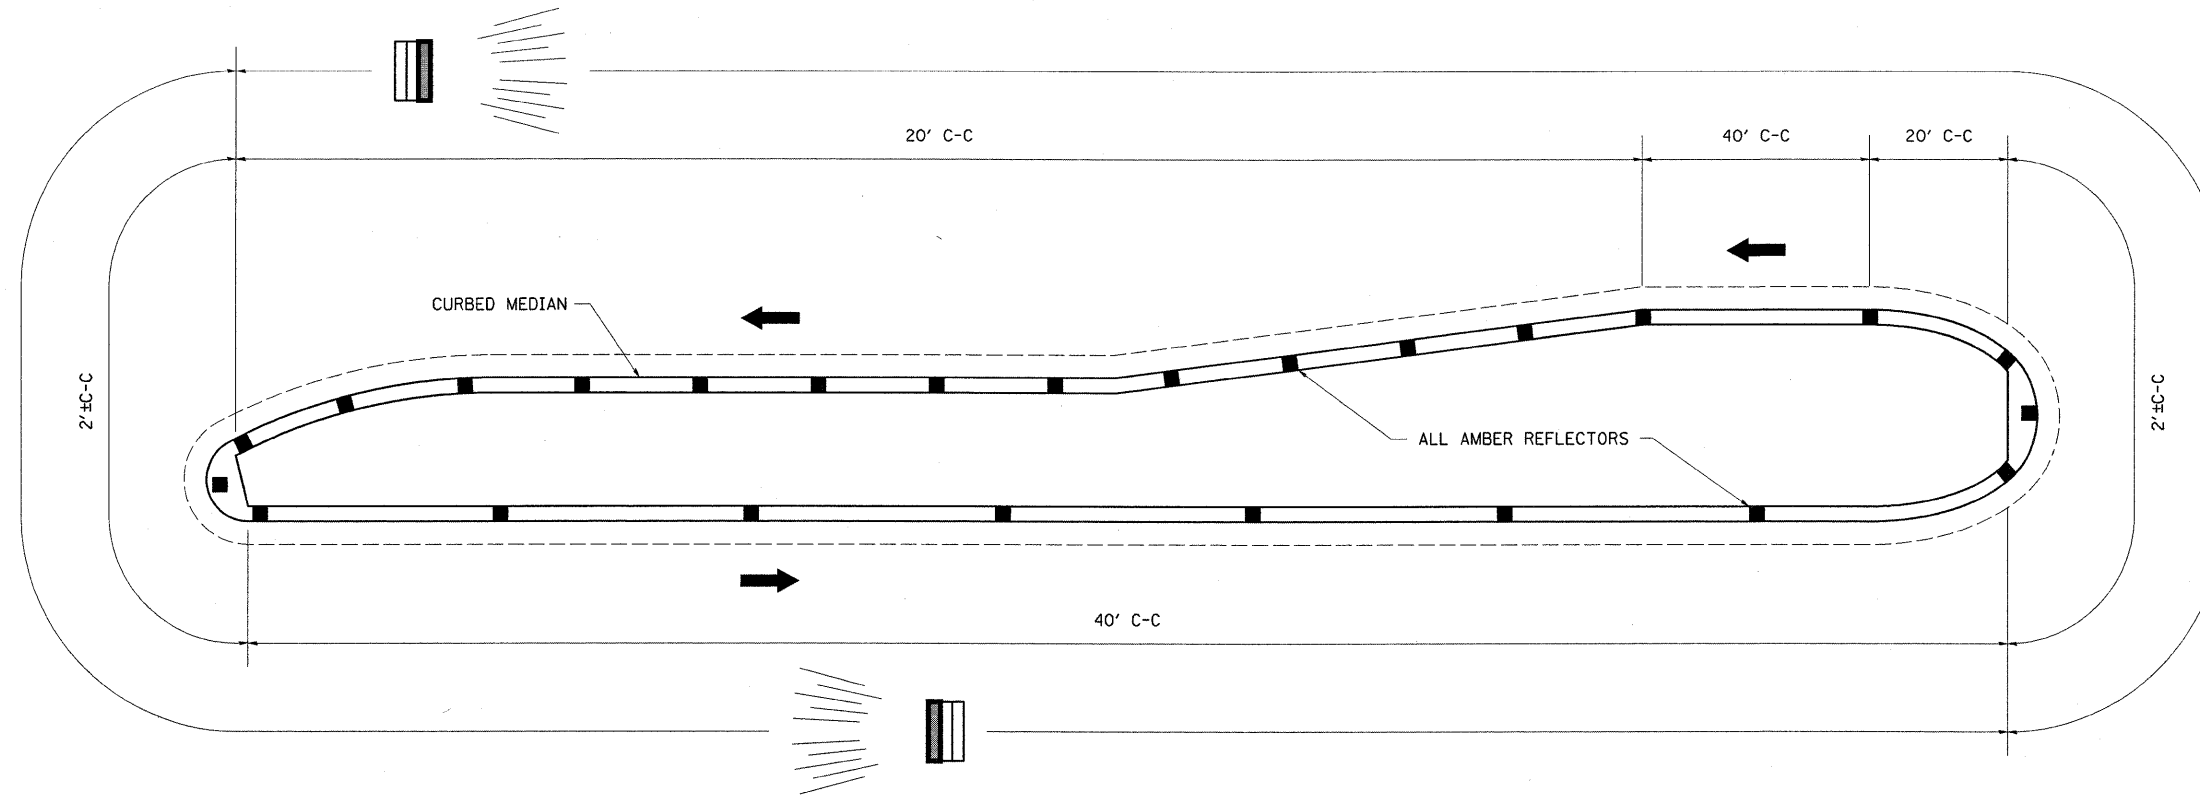
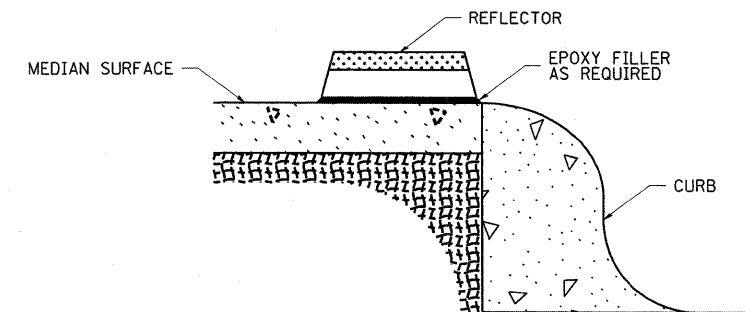


TYPICAL PLACEMENT OF PRISMATIC CURB REFLECTORS



1. PRISMATIC REFLECTORS SHALL BE MONO-DIRECTIONAL AND POSITIONED SO THAT THE REFLECTIVE FACE IS FACING THE APPROACHING TRAFFIC.
2. PRISMATIC REFLECTORS SHALL BE SECURED IN PLACE WITH AN EPOXY ADHESIVE.
3. PRISMATIC REFLECTORS SHALL BE EITHER AMBER OR CRYSTAL IN COLOR.
4. REFER TO SCHEDULES FOR PRISMATIC REFLECTOR QUANTITIES.
5. USE A MINIMUM OF 3 REFLECTORS ON ISLAND NOSES.

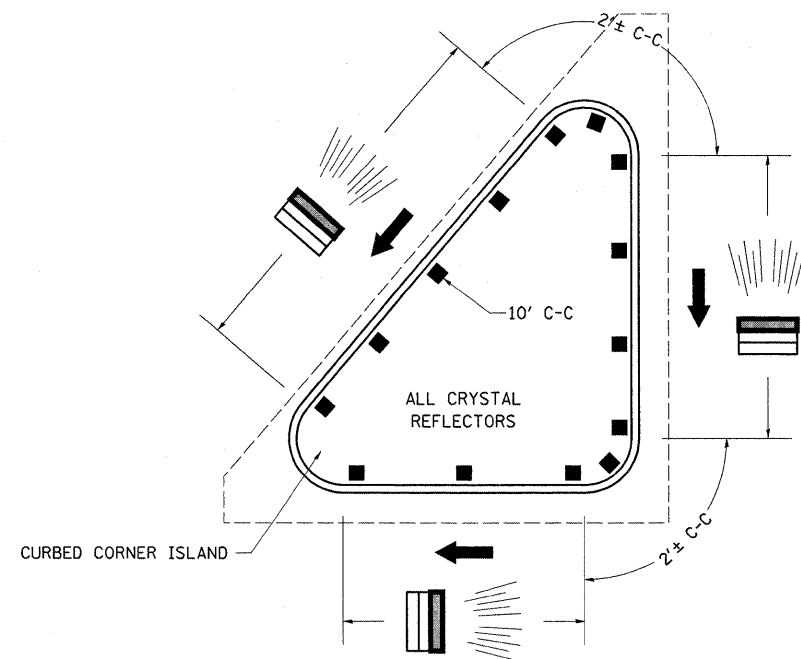

SECTION VIEW

NOT TO SCALE

FILE NAME =	USER NAME = teasleyck	DESIGNED -	REVISED -
c:\pwork\pwork\teasleyck\08209700\07	4494-sht-details.dgn	DRAWN -	REVISED -
	PLOT SCALE = 50,0000 ' / IN.	CHECKED -	REVISED -
	PLOT DATE = 2/16/2011	DATE -	REVISED -

**STATE OF ILLINOIS
DEPARTMENT OF TRANSPORTATION**

PRISMATIC CURB REFLECTOR			
SCALE:	SHEET NO.	OF SHEETS	STA. TO STA.

DISTRICT 7 DETAIL NO. 78200300				
F.A.P. RTE.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
832	.	Clark	31	30
			CONTRACT NO. 74494	
ILLINOIS FED. AID PROJECT				