


	STATION	OFFSET	ELEVATION
A	267+95.3	55.0' LT	689.78
B	100+74.7	26.1' LT	688.74
C	101+03.1	13.1' LT	688.27
D	101+15.3	12.0' LT	688.37
E	101+48.1	12.0' LT	688.63
F	102+18.1	10.4' LT	689.20*
G	102+18.1	0.0' LT	689.42*
H	102+18.1	11.7' RT	689.32*
I	101+48.1	24.0' RT	688.55
J	101+22.1	24.0' RT	688.27
K	101+02.7	25.3' RT	688.06
L	100+83.3	29.2' RT	688.15
M	269+07.6	55.0' RT	688.36
N	101+03.0	0.0' LT	688.51
O	267+91.6	67.0' RT	689.53
P	268+18.7	90.0' RT	688.38
Q	268+28.1	114.7' RT	688.76
R	268+95.5	114.7' RT	687.17
S	269+05.9	90.0' RT	687.03
T	269+39.3	67.0' RT	687.87
U	268+52.5	85.1' RT	688.40
V	268+52.6	114.7' RT	688.10
W	268+58.6	114.7' RT	688.40
X	268+52.6	114.7' RT	688.63
Y	267+76.6	15.0' LT	691.04
Z	267+76.6	3.0' RT	691.23
AA	267+87.6	15.0' LT	690.84
AB	267+87.6	3.0' RT	691.03
AC	269+28.3	3.0' LT	689.31
AD	269+28.3	15.0' RT	689.12
AE	269+39.3	3.0' LT	689.28
AF	269+39.3	15.0' RT	689.09

* MATCH EXISTING ELEVATION

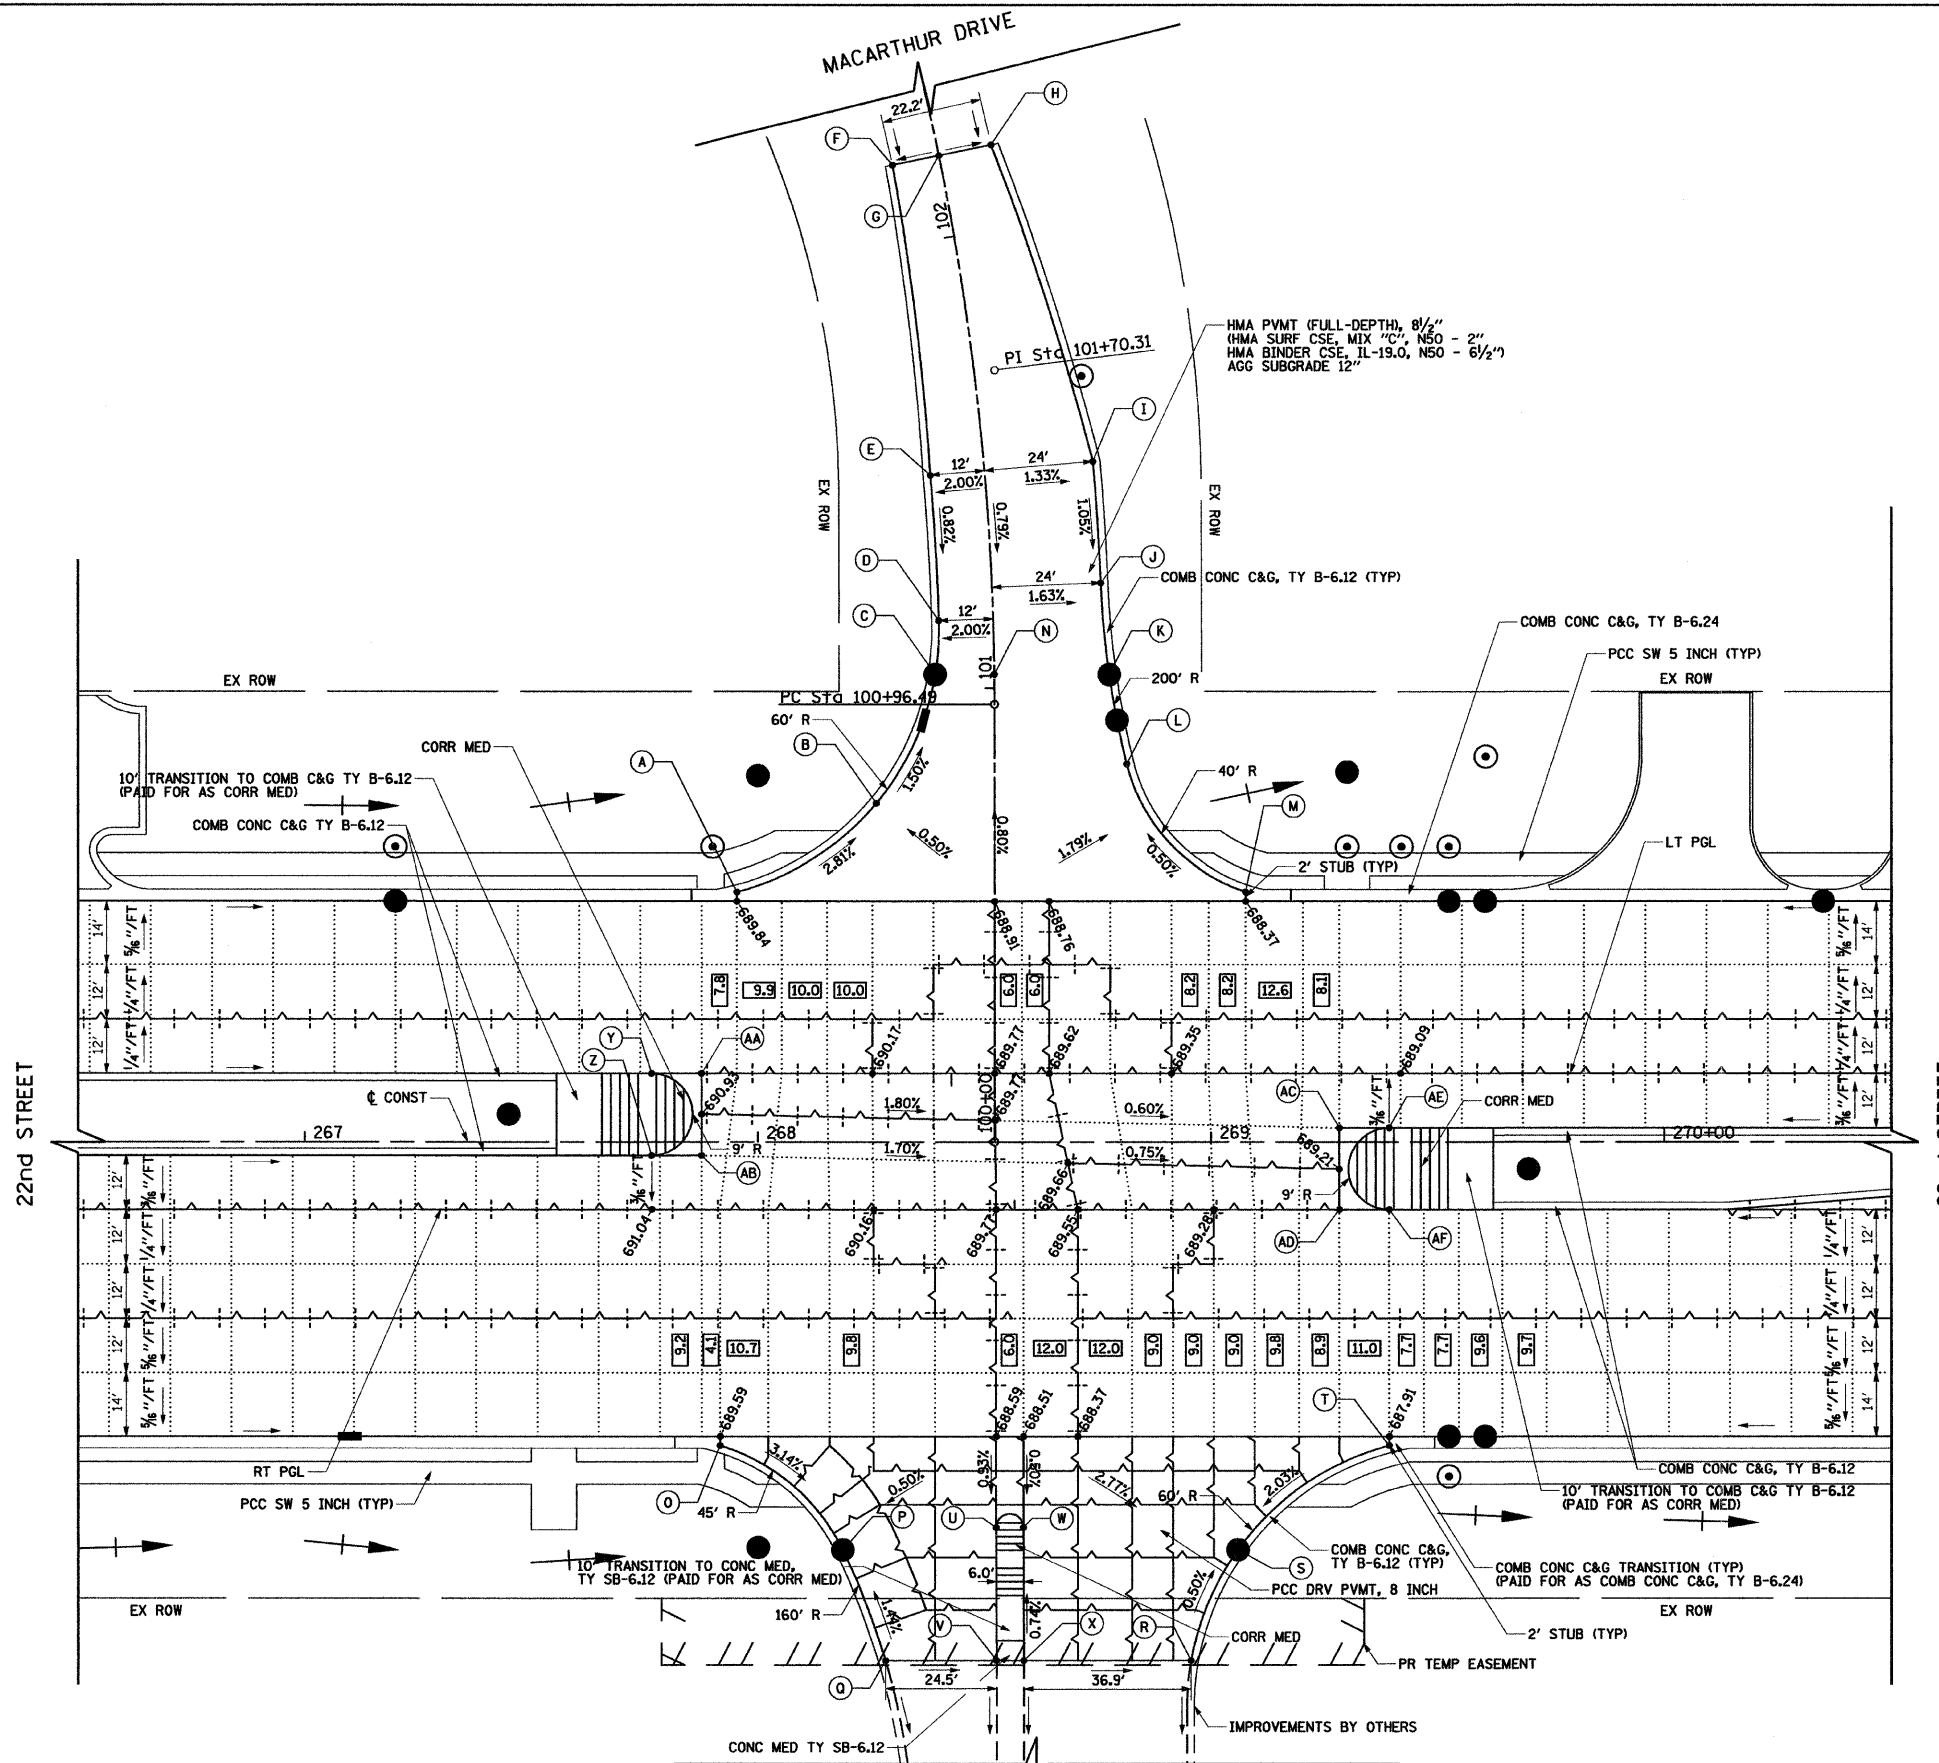

LEGEND

- CONSTRUCTION JOINT
 - LONGITUDINAL CONSTRUCTION JOINT NO. 6 X 2' LONG DEFORMED TIE BARS GROUTED-IN PLACE (EPOXY COATED) AT 2' C-C (STANDARD 42001-07)
 - TRANSVERSE CONSTRUCTION JOINT 1'-6" LONG DOWEL BARS (EPOXY COATED) AT 1' C-C (STANDARD 420101-04)
- SAWED JOINT
 - LONGITUDINAL SAWED JOINT NO. 6 X 2'-6" LONG DEFORMED TIE BARS (EPOXY COATED) AT 2'-6" C-C (STANDARD 42001-07)
 - TRANSVERSE CONSTRUCTION JOINT 1'-6" LONG DOWEL BARS (EPOXY COATED) AT 1' C-C (STANDARD 42001-07)
- SAWED/CONSTRUCTION JOINT WITHOUT BARS
- PAVEMENT SEPARATION JOINT (IDOT DISTRICT 1 STANDARD DETAIL BD52) (PAID FOR AS SLEEPER SLAB)

[12.5] LENGTH (IN FEET) OF PAVEMENT PANEL (BETWEEN TRANSVERSE JOINTS) IF DIFFERENT THAN 13.5'

- NOTES:**
- ADDITIONAL SAWED CONTRACTION JOINTS MAY BE REQUIRED IN THE FIELD, AS DIRECTED BY THE ENGINEER. EXACT LOCATIONS TO BE VERIFIED IN THE FIELD AND APPROVED BY THE ENGINEER.
 - ALL TRANSVERSE JOINTS SHALL BE A MAXIMUM OF 13.5 FEET UNLESS OTHERWISE NOTED. SEE STANDARD 420101-04 FOR ADDITIONAL INFORMATION.
 - PAVEMENT ROUNDOUTS FOR MANHOLES AND VALVE VAULTS SHALL BE CONSTRUCTED IN ACCORDANCE WITH STANDARD 420111-02.
 - ALL ELEVATIONS NOT SHOWN SHALL FOLLOW THE TYPICAL SECTIONS AND PROFILES.
 - PROPOSED ISLANDS SHALL BE CONSTRUCTED IN ACCORDANCE WITH STANDARD 606301-04.
 - ALL SIDEWALK RAMP MUST BE ADA COMPLIANT (STANDARD 424001-05).