



STA. 628+50 TO STA. 698+95

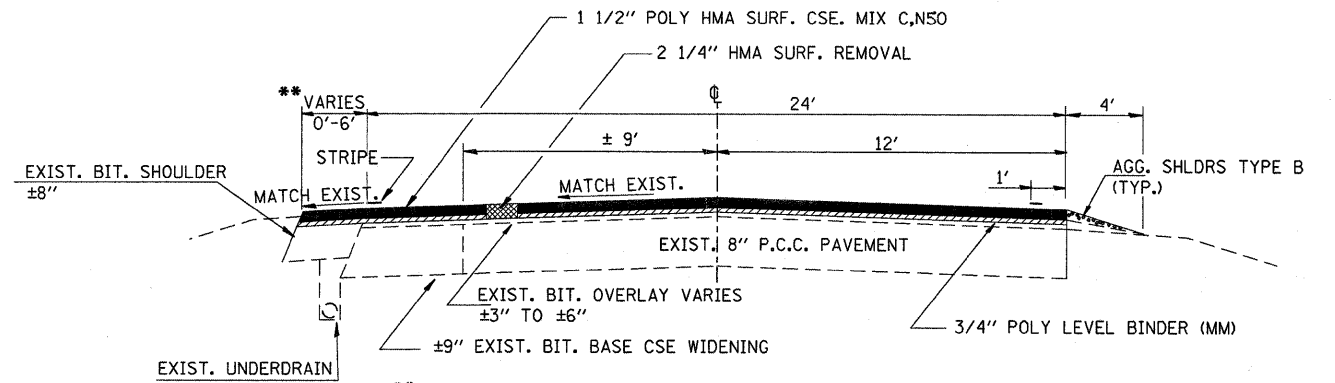

- STA. 698+95 TO STA. 710+69 - 4' RT. & LT.
- STA. 710+69 TO STA. 717+09 - 4' RT & 2' LT.
- STA. 717+09 TO STA. 730+90 - 2' RT. & LT.
- STA. 730+90 TO STA. 735+63 - 2' LT.
- STA. 798+48 TO STA. 816+60 - 3' RT. & LT.


	POLYMERIZED HMA LEVEL BINDER	POLYMERIZED HMA SURFACE
PG GRADE	SBS PG 70-22	SBS PG 70-22
DESIGN AIR VOIDS	4.0% @ N50	4.0% @ N50
MIXTURE COMPOSITION	IL 4.75	IL 12.5 OR IL 9.5
FRICTION AGGREGATE		MIXTURE C
DENSITY CONTROL LIMITS	CORES	CORRELATION

** IF RAP OPTION IS SELECTED, THE ASPHALT CEMENT GRADE MAY NEED TO BE ADJUSTED. THIS WILL BE DETERMINED BY THE ENGINEER.

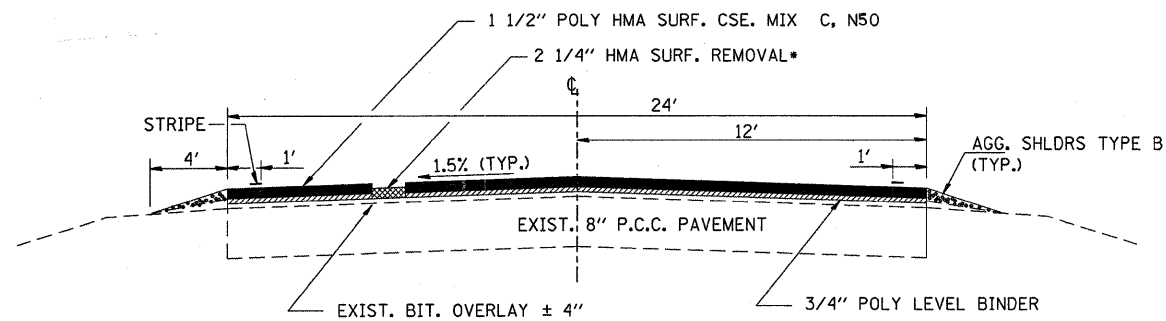

STA. 753+34 TO STA. 798+48
STA. 830+84 TO STA. 1055+25

* 1-1/2" HMA SURFACE REMOVAL FROM STA 852+40 TO STA 1055+25

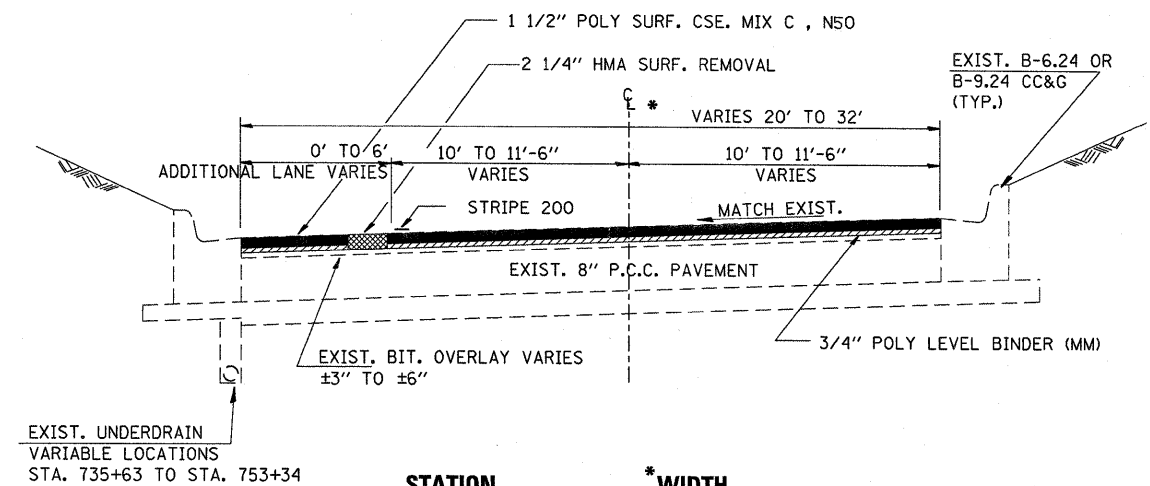

STATION	* WIDTH
STA. 735+63 TO STA. 753+34	24'
STA. 816+60 TO STA. 830+84	20'
STA. 1055+25 TO STA. 1109+54	24'
STA. 1109+54 TO STA. 1126+15	32'
STA. 1126+15 TO STA. 1165+59	24'